



SECTION AT A-A



SECTION AT B-B

NOTES:-

1. LONGITUDINAL SLOPE OF PIPE SHOULD BE MINIMUM OF 1 IN 1000.
2. ALL DIMENSIONS IN MILLIMETRE EXCEPT WHERE OTHER WISE MENTIONED

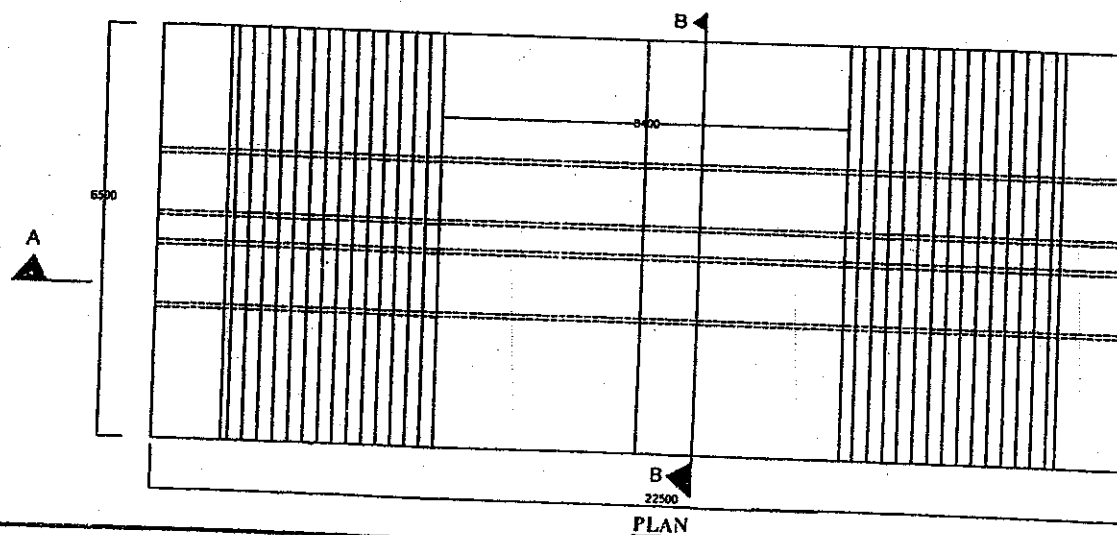

| C.G. P.W.D. BRIDGE CONSTRUCTION |  |
|---------------------------------|--|
| DWG. NO.<br>04                  | E.E. <i>[Signature]</i>  |
|                                 | S.D.O. <i>[Signature]</i>  |
| SUB.<br>ENGG.                   | CONSTRUCTION OF TWO ROW HUME PIPE<br>CULVERT ON APPROACH<br>ROAD |