



ELEVATION

MONTH AND LAST TWO DIGITS
OF YEAR OF MANUFACTURE

DETAIL OF GROOVES

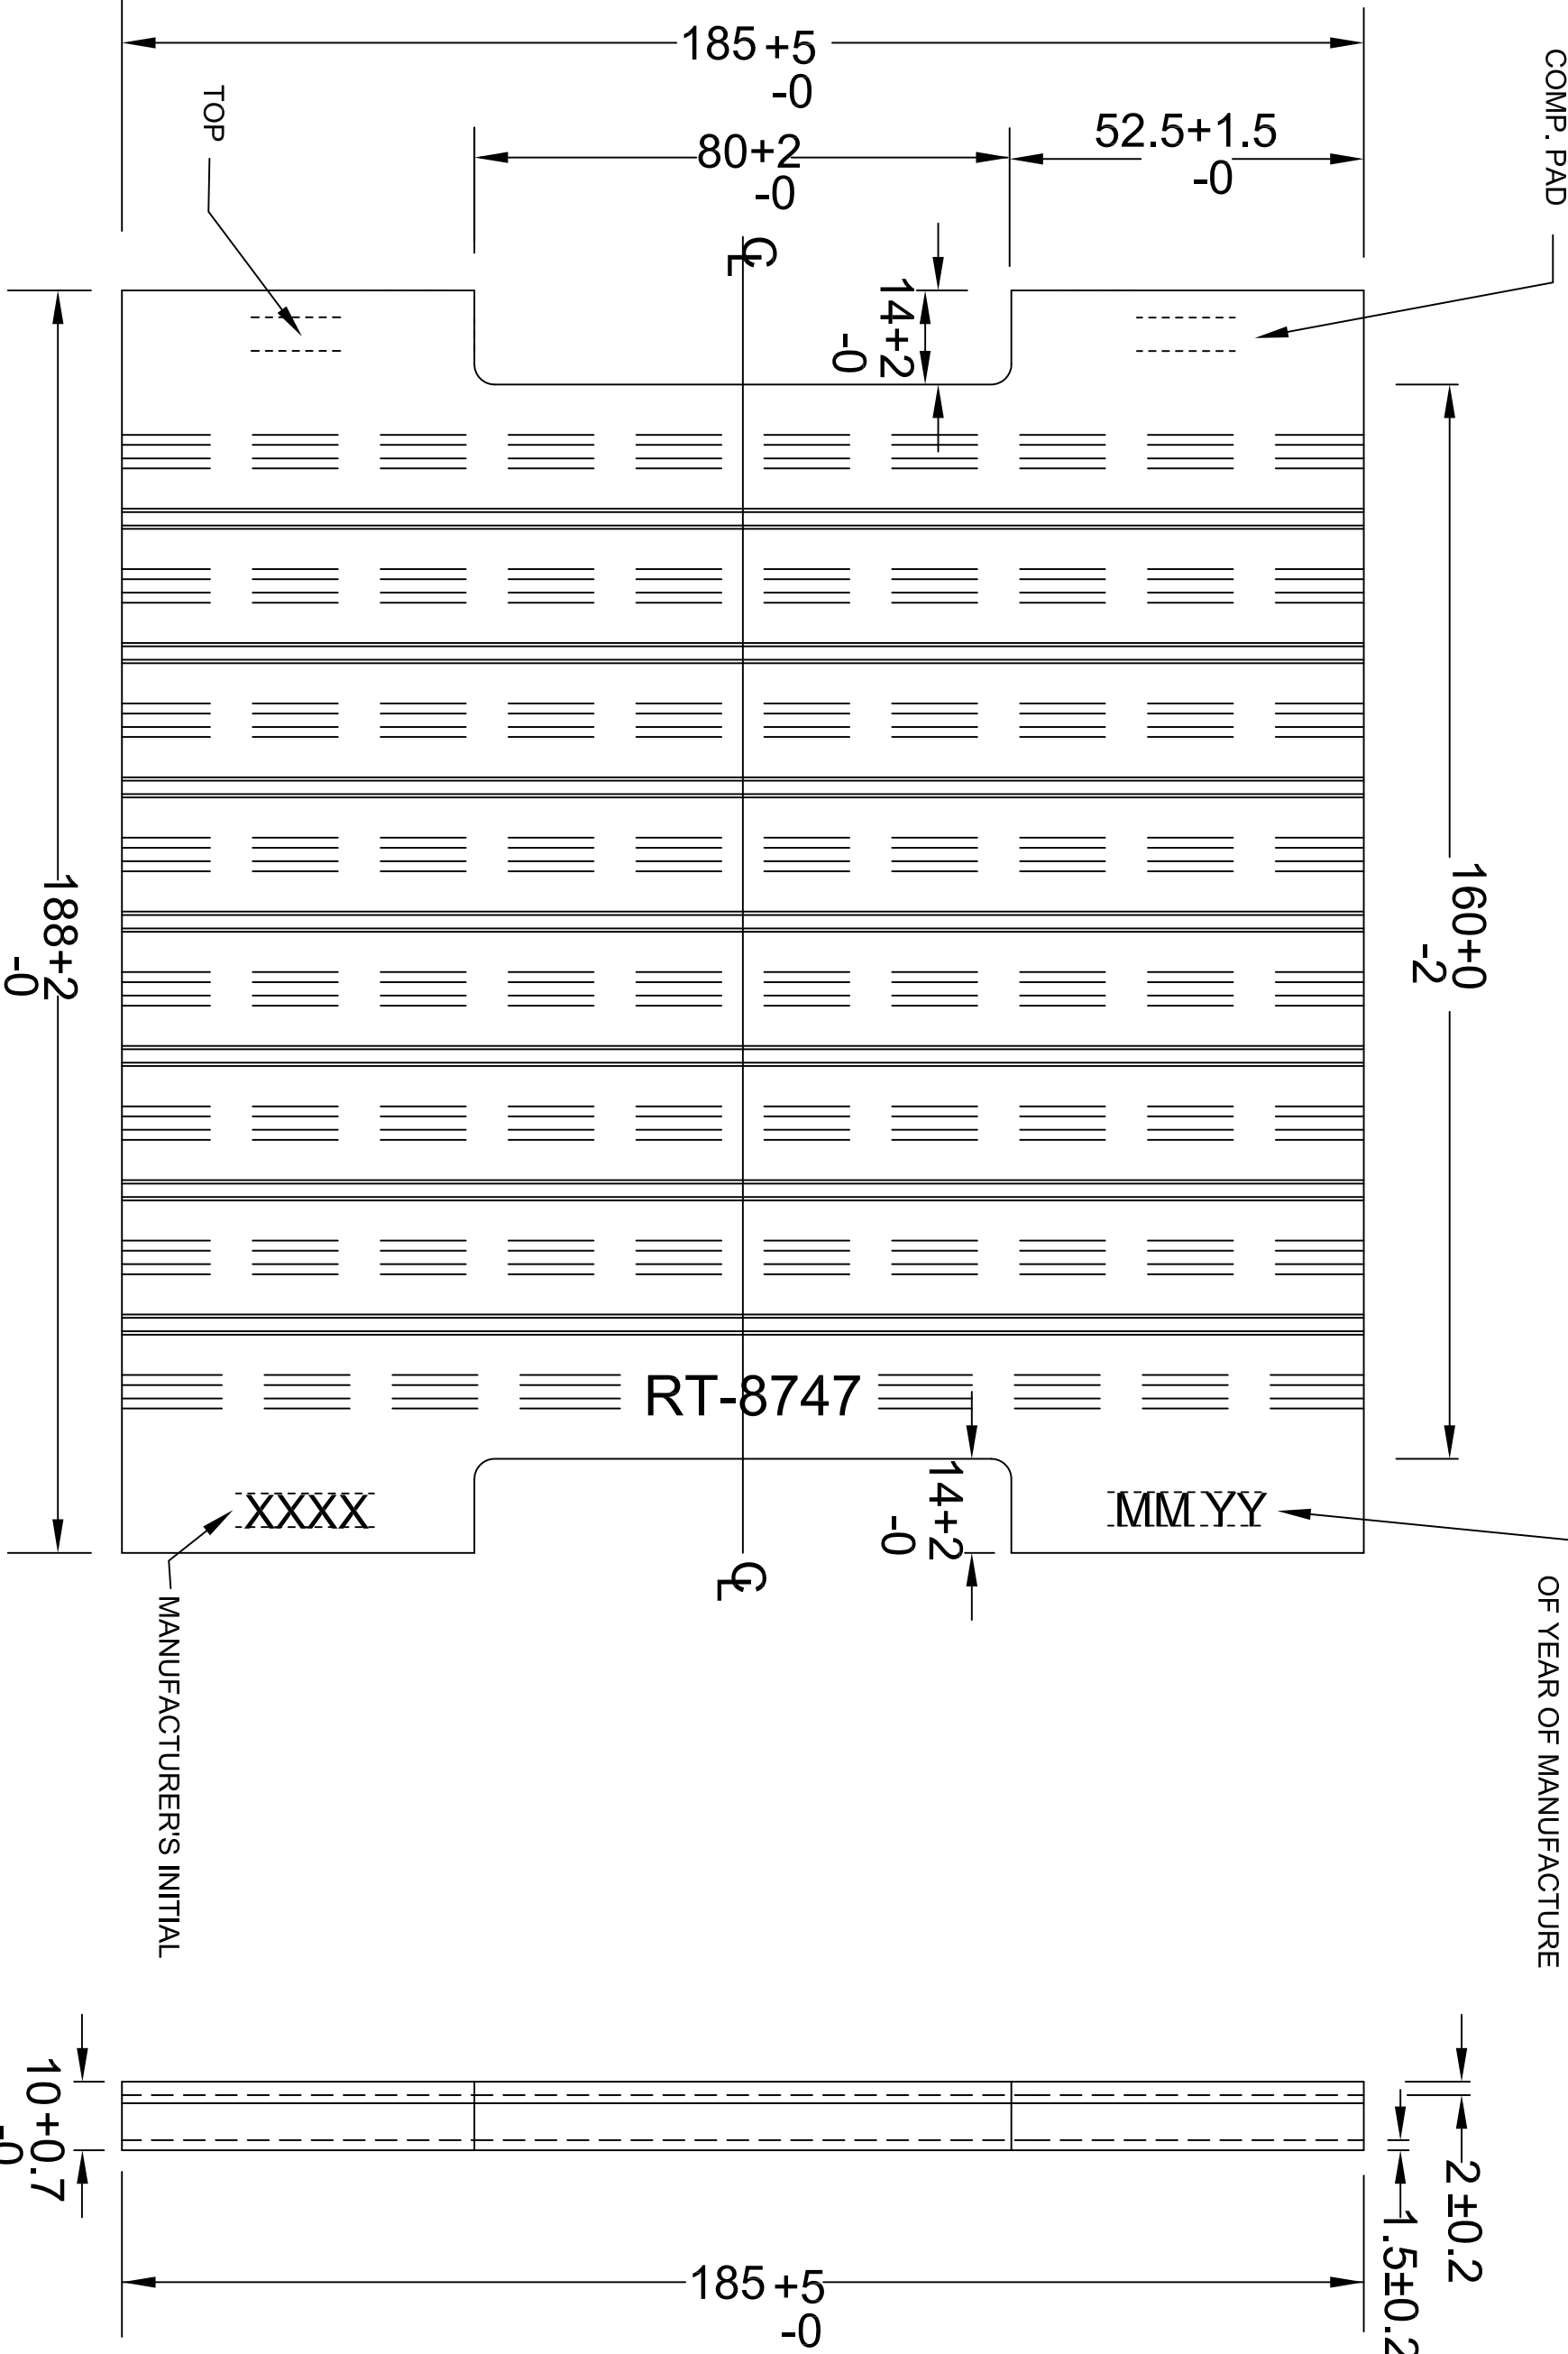

PLAN

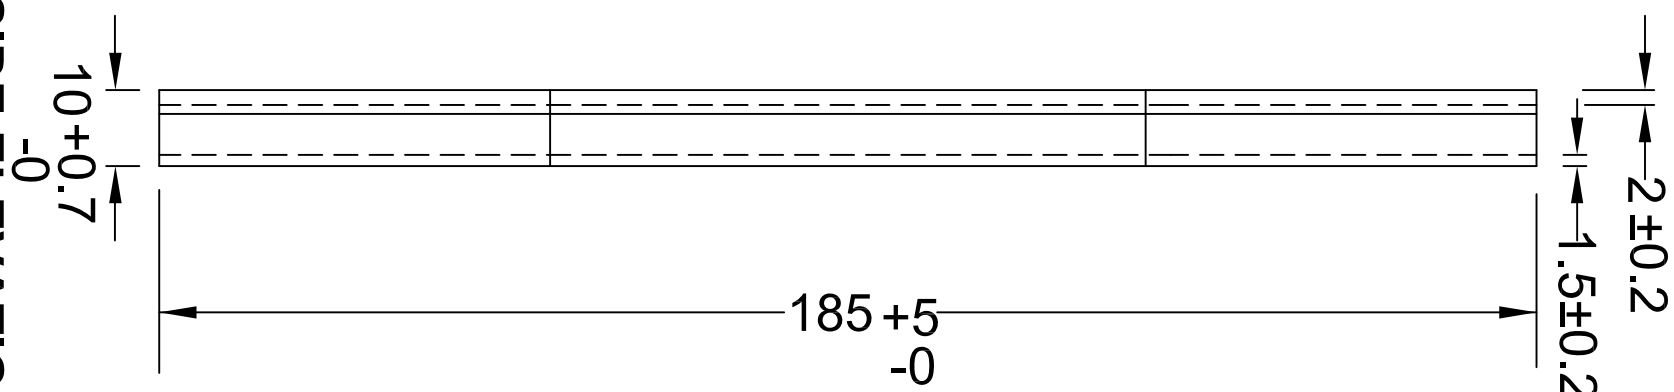

SIDE ELEVATION

5. THIS COMPOSITE GRSP CAN BE USED WITH CONCRETE SLEEPER(RT-8746) UPTO 25T AXLE LOAD WITH FULL SECTIONAL SPEED.
4. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
3. MARKING AS SHOWN SHALL BE EMBOSSED ACCORDING TO THE SPECIFICATION.
2. THICKNESS OF SHEET FOR COMPOUND 'A' & COMPOUND 'B' SHALL BE TAKEN AS 7±0.5mm & 3±0.5mm RESPECTIVELY FOR MANUFACTURE OF COMPOSITE GROOVED RUBBER SOLE PLATE OF THICKNESS 10+0.7/-0.0mm.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

NOTE

SPECIFICATION

SCALE


ALT

DESCRIPTION

DATE

RDSO/T-8747

IRS SPECIFICATION FOR
10MM THICK COMPOSITE
GROOVED RUBBER SOLE
PLATES FOR PLACING
BENEATH RAILS
PROVISIONAL-2007
NO. RDSO/M&C/RP-200/2007

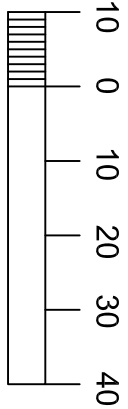

REVISED & REDRAWN

07.10.21

ADVANCE (T)
25-09-2018

THIS DRAWING IS THE PROPERTY OF
RESEARCH DESIGNS AND STANDARDS ORGANISATION
(MINISTRY OF RAILWAYS)
LUCKNOW-226011, INDIA
AND SHALL NOT BE USED, COPIED REPRODUCED IN
PART OR WHOLE WITHOUT PRIOR CONSENT IN WRITING.

R. D. S. O.

10mm THICK COMPOSITE
GROOVED RUBBER SOLE PLATE
FOR USE WITH WIDER PSC
SLEEPER TO DRAWING NO.
RDSO/T-8746 SUITABLE TO RAILS
60Kg. (UIC)/ 60E1 & 52Kg.

STAND
CANCID