


SURFACE ROUGHNESS Ra VALUES IN µm  
REMOVE ALL BURRS AND SHARP EDGES

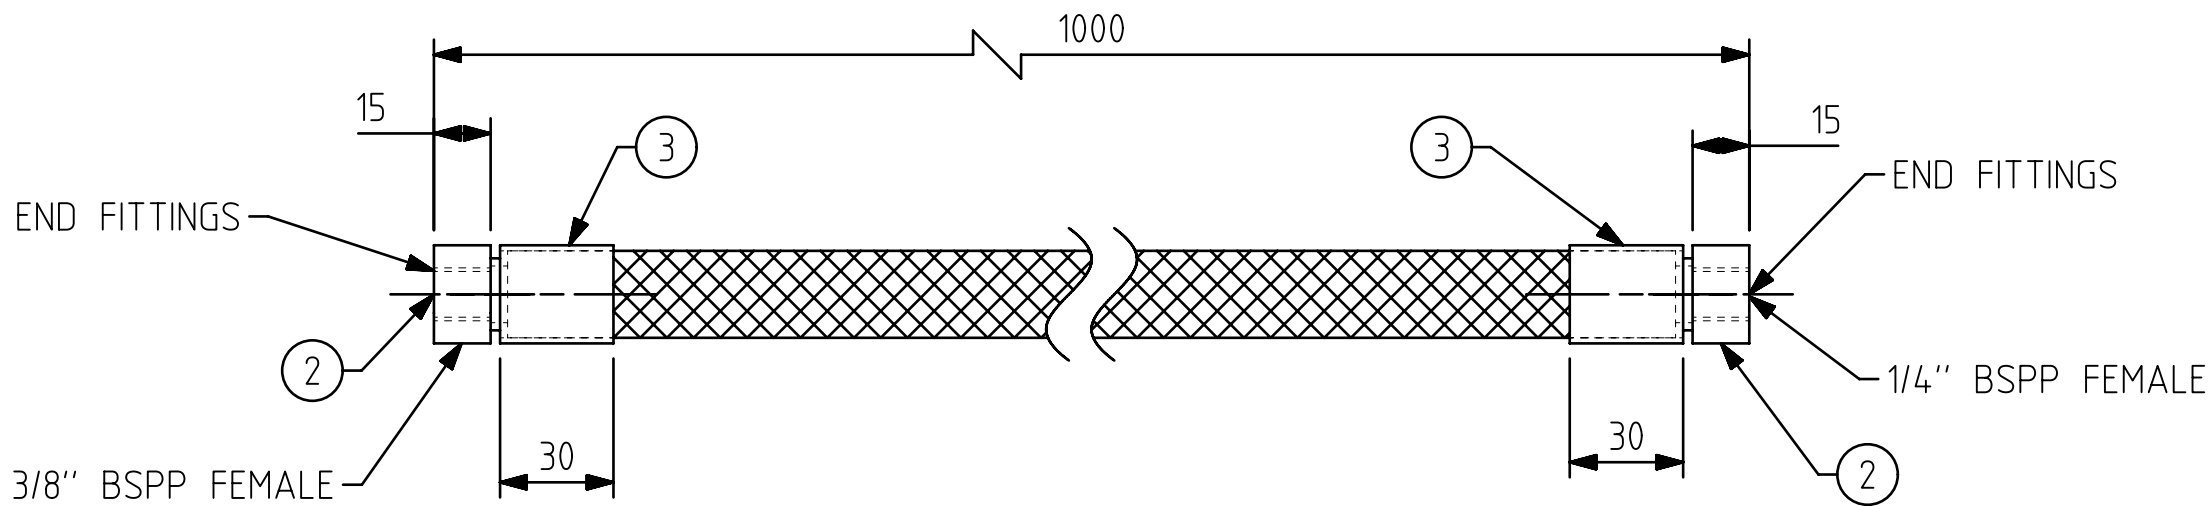

NOTE:-

1. THIS HOSE BODY SHALL CONFORM TO SAE 100 R1 TYPE
2. HOSE ASSEMBLY TO BE SUPPLIED WITH CRIMPED TYPE END FITTINGS.
3. ALL DIMENSIONS ARE IN mm. EXCEPT OTHERWISE STATED.
4. END FITTING ARE TO BE Zn PLATED (8-10 MICRON)/PASSIVATED.

1. ALL DIMENSIONS ARE IN mm
2. NEXT ASSLY. DRG. NO-1209-00.240-109
3. C&D NO-/
4. QTY./LOCO-02 NOS.
5. USED FOR LOCO WAG-9, WAG-7 ,WAP-5

3	/		CRIMPING SOCKET	2	STEEL	ASTM A108, GRADE 1018
2	/		END FITTINGS	2	STEEL	ASTM A108, GRADE 1018
1	/		FLEXIBLE HOSE	1	WIRE BRAIDED RUBBER REINFORCED	
निर्देश संख्या	लागत एवं वितरण संख्या	अंग आरेखण संख्या	वर्णन	मात्रा	पदार्थ	विशिष्टि
REF. NO.	C&D NO.	PART DRG. NO.	DESCRIPTION	QTY.	MATL	SPECN

		CHITTARANJAN LOCOMOTIVE WORKS			
FIRST ISSUED		FLEXIBLE HOSE ASSEMBLY FOR 22.5 KG. CO2 FIRE EXTINGUISHER			
CHECKED BY	<div><div>Bikash Naik</div><div>Digitally signed by Bikash Naik Date: 2024.10.17 16:06:49 +05'30</div></div>				
APPROVED BY	<div><div>AMIT AGGARWAL</div><div>Digitally signed by AMIT AGGARWAL Date: 2024.10.18 10:20:12 +05'30</div></div>	SIZE	DRG.NO.		SHEET REV
		A3	1209-00.340-244		-
		SCALE 1:2		SHEET 1 OF 1	