
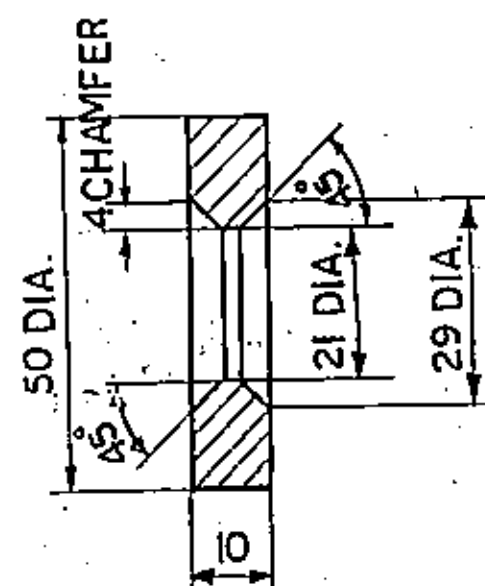


ACCEPTED VIDE LETTER NO. MW/CPL/TG OF 15/16.5.69

* ROUGHNESS NOS. IN MICRONS.

ROUGH MACHD.
* 40 TO 80
FINISH MACHD.
* 16 TO 40

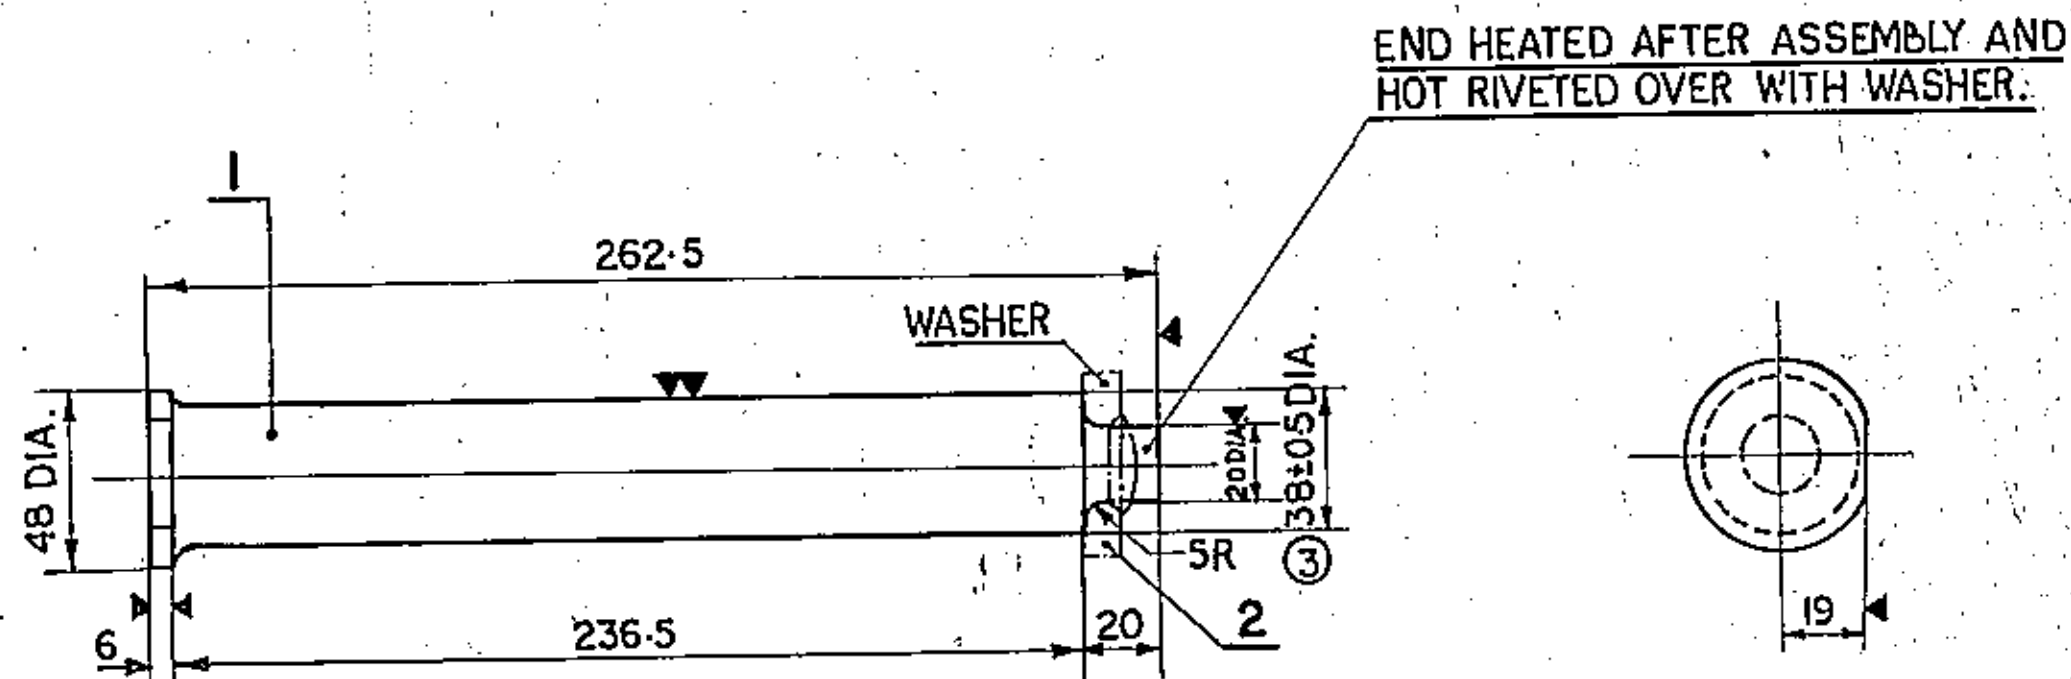

DETAIL OF WASHER

NOTE:-

PIN TO BE FITTED ON TO THE COUPLER FROM TOP & RIVETED OVER AT THE BOTTOM.

| | | | | |
|------|------|----------|---------------------------------|------|
| ④ | 2 | WD-97039 | MATERIAL UPDATED. | 9/97 |
| ③ | 1 | WD-7624 | MACHINING & TOLERANCE INDICATED | 7/76 |
| ALT. | ITEM | AUTHY | DESCRIPTION | DATE |

| | | | | | | | | |
|----------------------|---------|--------------------------|---|-----------|--------------------|----------------------------|--------|------|
| ④ | 2 | WASHER | 1 | - | - | IS:2062 F.410.VA | | |
| | 1 | PIN | 1 | - | - | IS:1875CL.5 GR.AAR.M112 | | |
| ITEM | | DESCRIPTION & DIMENSIONS | NO. OF | REF. DRG. | WT. OF ONE (KG) | MAT. ASPEC | REMARK | |
| SUPERSEDED BY:- | | | CLEVIS PIN WITH WASHER (FOR TRANSITION CBC) | | | | | |
| SUPERSEDES WGI-00255 | | | | | | | | |
| DATE | | | | | | | | |
| SCALE | PASSED | SL. SAKEN | | | | | | 5/69 |
| 1:1 | CHECKED | -Sd- | | | | | | 5/69 |
| 1:2 | DRAWN | SACIYVA | | | | | | 5/69 |
| | TRACED | R. SAKEN | | | | | | 5/69 |
| J. SHIM | | | | | | | | |
| 9/97 | B.G. | | R.D.S.O. | | GROUP | SK.69508 | | |
| 7/76 | [W] | | | | | | | |
| DATE | | | | | | | | |

| | | |
|----------|---------|----|
| F.D.S.W. | SPM/COM | TR |
| | | |
| | | |