

28 DIA, 2 HOLES

ONE FOR EACH	LAYOUT- FACING POINT B.G. FITTED WITH HIGH THRUST ROTARY LOCKING TYPE POINT MACHINE	RDSO/S 3262 -63
NO. OFF.	DESCRIPTION FOR ASSEMBLY	NO.

R. D. S. O.

LAYOUT- FACING POINT B.G.  
-INSULATION PLATE (R.H.)

STAND. CANCELLED	REV. 2-4-1992
------------------	---------------

RDSO/S 3265


MATL & SPEC	THERMOPLASTIC POLY URETHANE MOULDED INSULATION RDSO/SPN/S/168/02 IRS : S 23
-------------	---

SCALE	MILLIMETRES 10 0 10 30 DO NOT SCALE
-------	---

1. ALL DIMENSIONS IN MILLIMETRES.

NOTE

1	MODIFIED & RETRACED	29.7.02
ALT.	DESCRIPTION	DATE

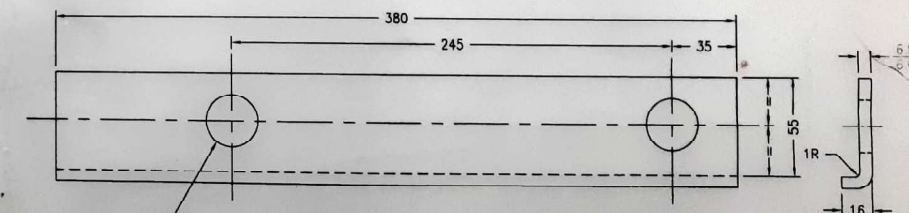

28 DIA, 2 HOLES

ONE FOR EACH	LAYOUT- FACING POINT B.G. FITTED WITH HIGH THRUST ROTARY LOCKING TYPE POINT MACHINE	RDSO/S 3262 -63
NO. OFF.	DESCRIPTION FOR ASSEMBLY	NO.

R. D. S. O.

LAYOUT- FACING POINT B.G.  
-INSULATION PLATE (L.H.)

STAND. CANCELLED	REV. 2-4-1992
------------------	---------------

RDSO/S 3266

MATL & SPEC	THERMOPLASTIC POLY URETHANE MOULDED INSULATION RDSO/SPN/S/168/02 IRS : S 23
-------------	---

SCALE	MILLIMETRES 10 0 10 30 DO NOT SCALE
-------	---

1. ALL DIMENSIONS IN MILLIMETRES.

NOTE

1	MODIFIED & RETRACED	29.7.02
ALT.	DESCRIPTION	DATE

(12)

(12)