
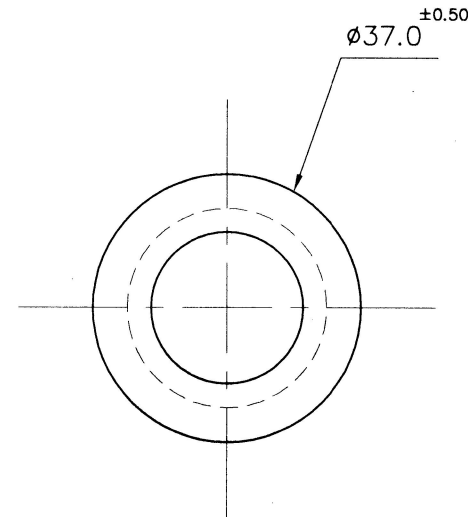


ALT-1

1. DIA DECREASED FROM 40mm TO 37
2. THICKNESS OF COLLAR INCREASED FROM 3.5/3.0 TO 4.5/4.0

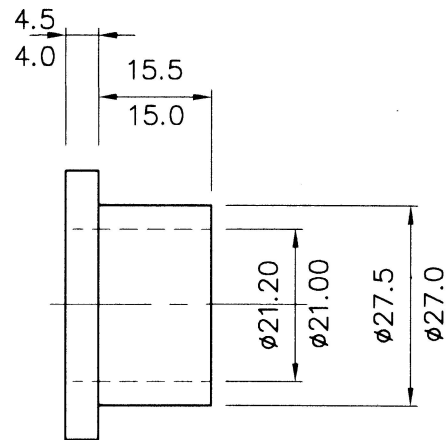

1. ALL DIMENSIONS ARE IN MILLIMETRE.


NOTE

DRAWN	SANEESH E.S
CHECKED	SSE
VERIFIED	
APPD-APE	
C'SIGNED	
FCWM/S&T/PTJ	

MATL. & SPEC.

THERMOPLASTIC
POLY URETHANE
MOULDED INSULATION
RDSO/SPN/S/168/02

SCALE: 1:1



RDSO/S 3400	CLAMP POINT LOCK 60 Kg [TWS] B.G.-LOCKING BAR ASSEMBLY	4
----------------	--	---

DRG NO	DESCRIPTION	QTY
--------	-------------	-----

FOR ASSEMBLY

COLLAR BUSH - SMALL

DRG.No.: CWM 05822

ALT.No.: 1

S & T WORKSHOP, S.RLY, PODANUR.