
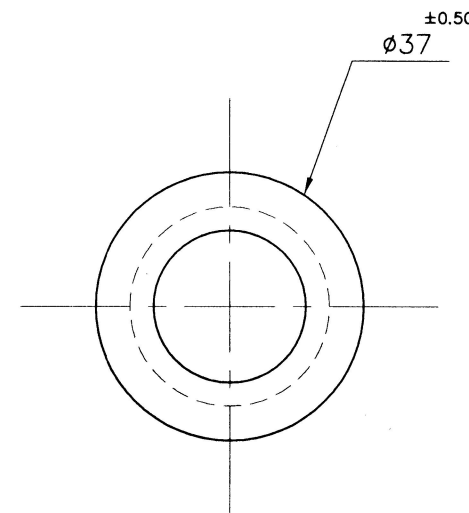


ALT-1

1. DIA DECREASED FROM 40mm TO 37
2. THICKNESS OF COLLAR INCREASED FROM 3.5/3.0 TO 4.5/4.0

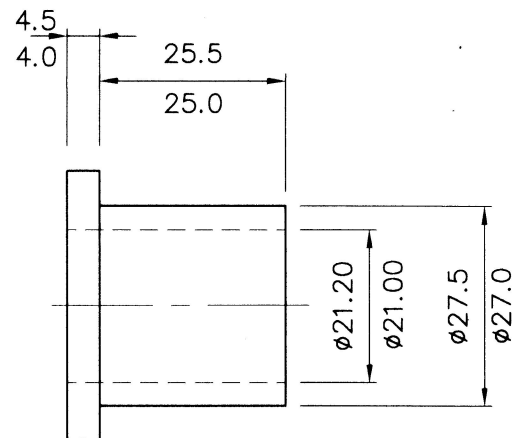

1. ALL DIMENSIONS ARE IN MILLIMETRE.

NOTE

| | |
|--------------|-------------------|
| DRAWN | SANEESH E.S |
| CHECKED | SSE <i>P.h.c.</i> |
| VERIFIED | <i>rev</i> |
| APPD-APE | <i>sub</i> |
| C'SIGNED | <i>16/05/23</i> |
| FCWM/S&T/PTJ | |

| MATL. & SPEC. | FOR ASSEMBLY | |
|---|----------------------------|--|
| THERMOPLASTIC POLY URETHANE MOULDED INSULATION RDSO/SPN/S/168/02 | COLLAR BUSH - LARGE | |
| SCALE: 1:1 | | |
| | DRG.No.: CWM 05722 | |
| | ALT.No.: 1 | |
| S & T WORKSHOP, S.RLY, PODANUR. | | |

| | | |
|----------------|--|-----|
| RDSO/S 3400 | CLAMP POINT LOCK 60 Kg [TWS] B.G.-LOCKING BAR ASSEMBLY | 4 |
| DRG NO | DESCRIPTION | QTY |