



Northern Railway (उत्तर रेलवे)
Mechanical Department, Headquarters Office
यांत्रिक विभाग, प्रधान कार्यालय
First Floor, Annexe-I, Baroda House, New Delhi-110001
प्रथम तल, अनैक्सी-1, बड़ोदा हाऊस, नई दिल्ली-110001.

No. DOM/C&W/DRG/SPEC

Dated: 28/03/2025

CWMs
JUDW, AMV/LKO,
CB/LKO & RCNK/SNP.

**Sub:- Issue of revised RDSO Specification No.
RDSO/2011/CG-04(Rev.04) of Axle Mounted Disc
Brake & EP Assist Brake System for LHB type BG
mainline coaches in Indian Railways.**

Ref.:- RDSO Letter No. MC/LHB/Brake dated 26.03.2025.

Kindly find enclosed herewith the copy of letter referred to above which is self explanatory along with revised RDSO Specification No. RDSO/2011/CG-04(Rev.04) of Axle Mounted Disc Brake & EP Assist Brake System for LHB type BG mainline coaches in Indian Railways.

This is for your kind information and necessary action.

Digitally Signed by
Devarshi Srivastava
Date: 28-03-2025 17:54:15
Reason: Approved

DA: As above

(देवर्षि श्रीवास्तव)

उप मु.यां. अभि./ कारखाना एवं समन्वय
कृते महा प्रबंधक (यांत्रिक)/ उ.रे.
FAX -011- 23383580

CC:- CRSE/Chg.



No. MC/LHB/Brake

Date: 26.03.2025

General Manager (Mechanical),

1. Central Railway, Chhatrapati Shivaji Terminus, Mumbai - 400 001
2. Eastern Railway, Fairlie Place, Kolkata - 700 001
3. Northern Railway, Baroda House, New Delhi - 110 001
4. Southern Railway, Park Town, Chennai - 600 003
5. South Central Railway, Rail Nilayam, Secunderabad - 500 071
6. South Eastern Railway, Garden Reach, Kolkata - 700 043
7. North Eastern Railway, Gorakhpur - 273 001
8. Northeast Frontier Railway, Maligaon, Guwahati - 781 011
9. Western Railway, Churchgate, Mumbai - 400 020
10. East Central Railway, Hajipur - 844 101
11. East Coast Railway, Chandrasekharapur, Bhubaneswar - 751 016
12. North Central Railway, Allahabad - 211 001
13. North Western Railway, Jaipur - 302 006
14. South Western Railway, Hubli - 580 023
15. West Central Railway, Jabalpur - 482 008
16. South East Central Railway, Bilaspur - 495 004
17. Integral Coach Factory, Chennai - 600 038
18. Rail Coach Factory, Hussainpur, Kapurthala, Punjab - 144 602
19. Modern Coach Factory, Raebareli, Lalganj- 229206
20. Konkan Railway Corp. Ltd. Corporate office, Belapur Bhawan, Nawi, Mumbai-400 614

Sub: Issue of revised specification of Axle Mounted Disc Brake & EP Assist Brake System for LHB type BG mainline coaches [RDSO specification no. RDSO/2011/CG-04 (Rev.04)] in Indian Railways.

In reference to the subject above, please find enclosed herewith the revised specification no. RDSO/2011/CG-04 (Rev.04) for Axle Mounted Disc Brake & EP Assist Brake System for LHB type BG mainline coaches in Indian Railways.

DA: As above.

26.03.25

(Sudhir Singh)

Director/E&S and Brakes/Carriage
E-mail: director.carr.es@rdso.railnet.gov.in

C/-:

EDME (Coaching), Rail Bhawan, Railway Board, New Delhi -110001 – for kind information please

INDIAN RAILWAYS



सत्यमेव जयते

Document content	Technical Specification	Yes
	Schedule of Technical Requirement	Yes
Description of item	SPECIFICATION FOR AXLE MOUNTED DISC BRAKE & EP ASSIST BRAKE SYSTEM FOR LHB TYPE BG MAINLINE COACHES	
Remarks	Nil	

S. No.	Month/Year of Issue	Revision/ Amendment	Page No.	Reason for Amendment
1.	November, 2012	-	-	First issue
2.	November, 2014	Rev.-1	6, 17, 20, 21, 32, 33 & 35	
3.	September, 2016	Amendment-1	3	To include the ISO Doc. No. QO-D-7.1-11. New sub clause No.1.3 added under clause no. 1.0 of Foreword.
4.	March, 2023	Rev.02	Relevant Pages	To improve clarity with focus on functional requirements for enhancing indigenous vendor base.
5.	May, 2024	Rev.03	All Pages	To include the EP assist brake system.
6.	March, 2025	Rev.04	Relevant Pages	To include the STR for ensuring good quality products and improving safety in train operations also modification done in Para 16 (Page No.14) & Para 6 (Page No.19) for better clarity.

Issued by:

Carriage Directorate

Research Designs and Standards Organization

Manak Nagar, Lucknow - 226011

Signature	<i>Man Singh Meena</i> 26.03.2025	<i>Mahesh</i> 26.03.25	<i>Sudhir Singh</i> 26.03.25
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CONTENTS

PART – I GENERAL CONDITION		
CLAUSE NO.	DESCRIPTION	PAGE NO.
1.	FOREWORD	4
2.	DEFINITION AND EXPLANATORY	4
3.	SCOPE	5
4.	PARTICULAR REQUIREMENTS	5
5.	GURANTEE/WARRANTY	5
6.	SPARE PARTS, RESERVE APPARATUS & WEARING PIECES	5
7.	AFTER SALES SERVICE	6
8.	TRAINING	6
PART – II TECHNICAL REQUIREMENTS		
9.	SCOPE OF SUPPLY	7
10.	PERFORMANCE REQUIREMENTS	10
11.	DESIGN REQUIREMENTS	10
12.	SUBMISSION OF TECHNICAL DOCUMENTS	11
13.	APPROVAL OF DRAWING	11
14.	MANUFACTURE	11
15.	INSPECTION	12
16.	FIELD TRIAL	12
17.	MARKING	12
18.	PACKING	13

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 3 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	--------------	--------------------------------------	------------------------------------

APPENDIX

APPENDIX – A	SPECIFICATION FOR BRAKE CONTAINER MODULE
APPENDIX – B	SPECIFICATION FOR BRAKE CYLINDER
APPENDIX – C	SPECIFICATION FOR BRAKE CALIPER ASSEMBLY
APPENDIX – D	SPECIFICATION FOR PASSENGER EMERGENCY ALARM SYSTEM
APPENDIX – E	SPECIFICATION FOR EMERGENCY BRAKE ACCELERATOR VALVE
APPENDIX – F	SPECIFICATION FOR WHEEL SLIDE PROTECTION UNIT (WSP)
APPENDIX – G	SPECIFICATION FOR BRAKE INDICATORS
APPENDIX – H	SPECIFICATION FOR EP ASSIST EQUIPMENTS
APPENDIX – I	SPECIFICATION FOR LAPTOP
ANNEXURE – I	DATA AND INTERFACES
ANNEXURE – II	EP ASSIST WIRING SCHEME BETWEEN LOCOMOTIVE & COACHES
ANNEXURE – III	EP ASSIST WIRING SCHEME AT COACH LEVEL (INDICATIVE)
ANNEXURE – IV	SCHEDULE OF TECHNICAL REQUIREMENTS (STR)

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 4 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	--------------	--------------------------------------	------------------------------------

PART-I: GENERAL CONDITIONS

1.0 FOREWORD

1.1 This specification is intended to cover Axle mounted disc brake system & EP assist feature for all AC (EOG), AC (SG), Power Car and Double Decker and Non-AC types of LHB design coaches with LHB shell fitted with FIAT bogies having twin pipes graduated release compressed air brake system for operation on BG (1676 mm) system of Indian Railway.

1.2 Following specification may be referred to in conjunction with this specification:

- i. UIC specification no.540
- ii. UIC specification no.541-1
- iii. UIC specification no.541-3
- iv. UIC specification no.541-5
- v. UIC specification no.542
- vi. UIC specification no.543
- vii. UIC specification no.544-1
- viii. UIC specification no.545
- ix. UIC specification no.546
- x. UIC specification no.547
- xi. UIC specification no.831 R
- xii. RDSO specification no.02-ABR-02
- xiii. RDSO specification no.04-ABR-02
- xiv. RDSO specification no.C-K209
- xv. RDSO specification no.C-K013
- xvi. T.S.No.17.503 Part Doc 100 version-00
- xvii. T.S.No.17.614 Part Doc 100 version-01
- xviii. T.S.No.17.501 Part Doc 100 version-00
- xix. T.S.No.17.505 Part Doc 100 version-00
- xx. T.S.No.17.499 Part Doc 100 version-00
- xxi. Relevant DIN, EN & ISO standards as applicable

1.3 General:

1.3.1 Following shall be applicable when this item appears in RDSO's vendor directory:

"All the provisions contained in RDSO's ISO procedures laid down in Document No. QO-D-7.1-11 dated 19.07.2016 (titled "Vendor-Change in approved status") and subsequent versions/amendments thereof, shall be binding and applicable on the successful vendor/vendors in the contracts floated by Railways to maintain quality of products supplied to Railways."

1.3.2 The Govt. of India policy on 'Make in India' shall apply:

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 5 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	--------------	--------------------------------------	------------------------------------

1.3.3 Manufacturer will ensure the usage of environment friendly material and energy efficient instruments/equipments.

2.0 DEFINITION AND EXPLANATION

2.1 'TENDERER' means firm/company from whom the offer for the supply of disc brake equipment is invited.

2.2 'CONTRACTOR' means the firm/company on whom the order for the supply of the brake equipment is placed/will be placed.

2.3 'PURCHASER' means the Indian Railways on behalf of the President of the Republic of India who are purchasing the brake equipment.

2.4 'INSPECTING AUTHORITY' means the organization or its representative nominated by the purchaser to inspect the brake equipment on his behalf.

2.5 The Research Designs & Standards Organization, Manak Nagar, Lucknow-226011 is hereafter referred to as 'RDSO'.

2.6 Rail Coach Factory, Kapurthala (Punjab) is hereafter referred to as RCF.

2.7 The Indian Railways is hereafter referred to as IR.

2.8 In case the tenderer needs any clarification in respect of any clause of this specification or regarding the exhibited drawings, the tenderer shall obtain the same from RCF/RDSO.

2.9 The Axle Mounted Disc Brake system is hereafter referred to as 'AMDBS'.

2.10 The EP assist is hereafter referred to as 'EPA'.

3.0 SCOPE

3.1 This specification covers the technical requirements related to inspection, testing and performance of Axle mounted disc brake system & EP assist feature for LHB design coaches fitted with FIAT bogies of Indian Railways and does not include all the necessary provisions of the contracts.

3.2 Firm willing to supply Axle mounted disc brake system & EP Assist feature must ensure that its' offered brake system is compatible to work with the locomotive with EP Assist feature whose requirements are mentioned in relevant RDSO specifications for diesel & electric locomotives respectively.




4.0 PARTICULAR REQUIREMENTS

4.1 The firm should possess ISO: 9001 certificate issued by International Accreditation Forum (IAF) under Multilateral Recognition Arrangement (MLA) for his works address, covering the items for which he seeks registration with RDSO.

4.2 The firm along with their principals shall have adequate infrastructures for manufacturing, testing and quality control requirements for complete disc brake & EP assist brake system. This will be verified by RDSO at the time of registration of the firm.

5 GUARANTEE/WARRANTY

5.1 For brake system supplied by the contractor, in case of any part of the brake system failing or proving unsatisfactory in service due to defective design, material or workmanship, within 36 months from the date of delivery or 24 months from the date of placing in service whichever is earlier, shall be replaced by the contractor at his own expense. For Distributor Valve, warranty clause of RDSO spec C-K209 shall be applicable.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 6 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	--------------	--------------------------------------	------------------------------------

6 SPARE PARTS, RESERVE APPARATUS & WEARING PIECES

- 6.1 The offer shall include recommended list of spare parts required for day-to-day maintenance of the brake equipment and spares in the form of kit for the various sub-assemblies for the maintenance at the time of POH. The list shall include the part number, quantity required and price of each component.
- 6.2 Firm shall ensure availability of all spares for a period of at least 10 years. This shall be irrespective of the fact whether the tenderer or his sub-contractor(s) have stopped manufacturing of the equipment to the design supplied to IR.
- 6.3 In order to ensure the highest availability and utilization of brake system, a certain number of standby units of principal assemblies are required. In addition, the firm may stock sufficient minor components and spares to meet renewal and replacement on account of wear or occasional failure, for a period of 5 years' service. Tenderer shall, therefore, submit a classified list of spares (unit exchange, spares & stage/normal maintenance) for each type of equipment of brake system, which he recommends for stocking.
- 6.4 The firm shall indicate in an itemized list, the life expectancy of components subjected to wear under Indian conditions.

7 AFTER SALES SERVICE

- 7.1 Firm may be required to send their technical expert during the installation and commissioning of their equipment on coach/coaches.
- 7.2 Firm shall also depute their technical expert on request by the Purchaser/RDSO to investigate and attend to specific problems that may come up during actual operation of disc brake system.
- 7.3 Firm shall associate with Indian Railways during the trials with disc brake system. It shall also undertake to modify the equipment supplied, if required as a result of trials.
- 7.4 Firm shall supply adequate nos. of copies (soft & hard copy both) of the Operation & Maintenance Manuals and Servicing Instructions of disc brake system to the PUs whenever requested. PU's will ensure that copies of these maintenance manuals are issued to respective Railways where the coaches were allotted. These should normally include:
 - 7.4.1 Brief Details of functioning of each equipment.
 - 7.4.2 Details of attention to be given during IOH/POH or any other schedule examination.
 - 7.4.3 Test procedure and standards for various brake equipments on test bench as well as single coach/rake testing.
 - 7.4.4 Details of gauges, jigs & fixtures, tools, machinery and plant for maintenance of brake equipment/system.
 - 7.4.5 Typical defects and their remedial measures.
 - 7.4.6 List of spares for day to day maintenance and at the time of IOH/POH in the form of periodic overhaul kit.
 - 7.4.7 Maintenance standards including clearances and tolerances at various locations and permissible limits of wear for good service performance of equipments.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 7 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	--------------	--------------------------------------	------------------------------------

7.4.8 Firm shall submit the frequency and detailed work content of various inspection/maintenance schedules necessary for maintenance of air brake system offered by him. Whether these requirements are time based or distance travelled based shall be indicated for each schedule.

8 TRAINING



Manufacturer will organize free of cost Seminar/Workshops on Axle Mounted Disc Brake system once in a year in coaching having coach holding less than 50 and twice in a year in coaching depot having coach holding more than 50 at coaching depot/workshop where LHB coaches are being maintained.

PART-II: TECHNICAL REQUIREMENT

9 SCOPE OF SUPPLY

9.1 Scope of supply of axle mounted disc brake system & EP assist feature for all AC (EOG), AC (SG) & Non-AC(EOG) type of LHB design coaches shall cover the following equipments. It is the prerogative of purchaser to procure the system as complete set or in part:

S.N.	Description	Specification	Qty./coach	Remarks
1.	Brake Container Module	Appendix – A	1 Set	\$Max. BC pressure 3.0±0.1 Kg/cm ²
2.	Brake Cylinder (LH)	Appendix – B	4	Brake Caliper ratio is 2.17 for all EOG & SG Coaches except for the ACCN (SG). For ACCN (SG) coach Brake Caliper ratio is 2.48.
3.	Brake Cylinder (RH)	Appendix – B	4	
4.	Brake Caliper Assly. (LH)	Appendix – C	4	
5.	Brake Caliper Assly. (RH)	Appendix – C	4	
6.	Passenger Emergency Alarm Valve	Appendix – D	1	
7.	Passenger Emergency Alarm Pilot Valve with micro switch & indication Device	Appendix – D	*As reqd.	
8.	Brake Accelerator Valve	Appendix – E	1	
9.	Wheel Slide Protection Unit (WSP)	Appendix – F	1 Set	
10.	Brake Indicators	Appendix – G	4	
11.	Cut off angle cock 1-1/4"	Appendix – D of spec 02-ABR-02	4	
12.	Reducing Bush 1-1/4x1"	-	4	

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

13.	Hose coupling assembly for BP	Appendix – F of spec 02-ABR-02	2	Hose length 660+6 mm & Hose assembly 790+6 mm
14.	Hose Coupling Assembly for FP	Appendix – F of spec 02-ABR-02	2	Hose length 660+6 mm & Hose assembly 790+6 mm
15.	Hose Connection for Bogie	RDSO Drg. CG-19036 (Alt.-latest)	4	650 mm long#
16.	Hose connection for brake cylinders	RDSO Drg. CG-19037 (Alt.-latest)	8	500 mm long#
17.	Isolating cock 1"	--	2	#
18.	EP Assist Equipment	Appendix-H	–	@
19.	Laptop with installed software and connecting cable	Appendix-I	On supply of every 25 brake system or part thereof	

(\$): DV with Relay valve should have provision for pressure adjustment.

(*): Quantity may vary for different types of coaches.

(#): As per approved OEM drawing.

(@): Items may be procured with/without AMDBS. However, EP assist equipments will be compatible with brake system of same make.

- 9.2 Scope of supply of axle mounted disc brake system & EP assist feature for LHB type Power Car and SLR coaches shall cover the following equipment. It is the prerogative of purchaser to procure the system as complete set or in part:

S.N.	Description	Specification	Qty./coach	Remarks
1.	Brake Container Module	Appendix – A	1 Set	\$Max. BC pressure 3.0+0.1 Kg/cm ²
2.	Brake Cylinder (LH)	Appendix – B	2	
3.	Brake Cylinder (RH)	Appendix – B	4	
4.	Brake Cylinder (LH) with Hand Brake Arrangement	Appendix – B	2	
5.	Brake Caliper Assly. (LH)	Appendix – C	4	Brake Caliper ratio is 2.48 for Power Car and SLR
6.	Brake Caliper Assly. (RH)	Appendix – C	4	
7.	Passenger Emergency Alarm Valve	Appendix – D	1	
8.	Passenger Emergency Alarm Pilot Valve with micro switch & indication Device	Appendix – D	*As reqd.	

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

9.	Brake Accelerator Valve	Appendix – E	1	
10.	Wheel Slide Protection Unit (WSP)	Appendix – F	1 Set	
11.	Brake Indicators	Appendix – G	6	
12.	Cut off angle cock 1-1/4"	Appendix – D of spec 02-ABR-02	4	
13.	Reducing Bush 1-1/4x1"	-	4	
14.	Hose coupling assembly for BP	Appendix – F of spec 02-ABR-02	2	Hose length 660 \pm 6 mm & Hose assembly 790 \pm 6 mm
15.	Hose Coupling Assembly for FP	Appendix – F of spec 02-ABR-02	2	Hose length 660 \pm 6 mm & Hose assembly 790 \pm 6 mm
16.	Hose Connection for Bogie	RDSO Drg. CG-19036 (Alt.-latest)	4	650 mm long#
17.	Hose Connection for brake cylinders	RDSO Drg. CG-19037 (Alt.-latest)	8	500 mm long#
18.	Isolating cock 1"	-	2	#
19.	Guard's emergency Brake Valves	-	1	#
20.	Pressure Gauges for Brake Pipe	Appendix – H of spec 02-ABR-02	1	
21.	Pressure Gauges for Feed Pipe	Appendix – H of spec 02-ABR-02	1	
22.	Pressure Gauges for Brake Cylinder	Appendix – H of spec 02-ABR-02	1	
23.	Flex ball Cable – Long G=4024mm	-	1	#
24.	Flex ball Cable – Short G=2333mm	-	1	#
25.	Flex ball Cable – Coach G=2197mm	-	2	#
26.	Roller operated Cam valve	-	1	#
27.	EP Assist Equipment	Appendix-H	-	(@)
28.	Laptop with installed software and connecting cable	Appendix-I	On supply of every 25 brake system or part thereof	

(\$): DV with Relay valve should have provision for pressure adjustment.

(*): Quantity may vary for different types of coaches.

(#): As per approved OEM drawing.

(@): Items may be procured with/without AMDBS. However, EP assist equipments will be compatible with brake system of same make.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

9.3 Scope of supply of Axle mounted Disc brake system for LHB type Double Decker Coaches shall cover the following equipment. It is the prerogative of purchaser to procure the system as complete set or in part:

S.No.	Description	Specification	Qty./coach	Remarks
1.	BP Panel Assembly	Appendix – A	1 Set	\$Max BC pressure 3.8+0.1 Kg/cm ²
2.	FP Panel Assembly	Appendix – A	1 Set	
3.	Auxiliary reservoir – 125ltr with drain cock (for brake system)	Appendix – A	1	
4.	Auxiliary reservoir – 75ltr with drain cock (for CDTs)	Appendix – A	1	
5.	Control reservoir – 6 ltr.	Appendix - A	1	
6.	Strap for 125 ltr reservoir	Appendix - A	1	
7.	Strap for 75 ltr reservoir	Appendix - A	1	
8.	Brake Cylinder (LH)	Appendix – B	4	Brake Caliper ratio is 2.48
9.	Brake Cylinder (RH)	Appendix – B	4	
10.	Brake Caliper Assly. (LH)	Appendix – C	4	
11.	Brake Caliper Assly. (RH)	Appendix – C	4	
12.	Passenger Emergency Alarm Valve	Appendix – D	1	
13.	Passenger Emergency Alarm Pilot Valve with micro switch & indication Device	Appendix – D	*As reqd.	
14.	Brake Accelerator Valve	Appendix – E	1	
15.	Wheel Slide Protection Unit (WSP)	Appendix – F	1 Set	
16.	Brake Indicators	Appendix – G	4	
17.	Cut off angle cock 1-1/4"	Appendix – D of spec 02-ABR-02	4	
18.	Reducing Bush 1-1/4x1"	-	4	
19.	Hose coupling assembly for BP	Appendix – F of spec 02-ABR-02	2	Hose length 660+6 mm & Hose assembly 790+6 mm
20.	Hose Coupling Assembly for FP	Appendix – F of spec 02-ABR-02	2	Hose length 660+6 mm & Hose assembly 790+6 mm
21.	Hose Connection for Bogie	RDSO Drg. CG-19036 (Alt.-latest)	4	650mm long#
22.	Hose Connection for brake cylinders	RDSO Drg. CG-19037 (Alt.-latest)	8	500 mm long#
23.	Isolating cock 1"		2	#
24.	EP Assist Equipment	Appendix-H	–	(@)
25.	Laptop with installed software and connecting cable	Appendix-I	On supply of every 25 brake system or part thereof	

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 11 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

(\$): DV with Relay valve should have provision for pressure adjustment.

(*): Quantity may vary for different types of coaches.

(#): As per approved OEM drawing.

(@): Items may be procured with/without AMDBS. However, EP assist equipments will be compatible with brake system of same make.

10 PERFORMANCE REQUIREMENTS

- 10.1 The brake system shall be twin pipe graduated release type and its performance shall conform to the latest revision of UIC Specification 540 and 547.
- 10.2 The brake equipment shall give a trouble free service for a period of minimum six years from the date of commission or date of placement in service, whichever is later, with maintenance as per OEMs recommendation.
- 10.3 It shall be possible to obtain atleast 10% reduction in full service braking distance at a speed of 160kmph (on rake with at least 18 coaches comprising of two nos. of Power Car/Guard Van type coaches), during brake application on a straight and level track with EP brakes in both loco & coaches are in working condition as compared to full service braking distance with EP brakes in non-working condition.
- 10.4 The brake system must allow safe running of the train down the longest and steepest gradient as indicated in Annexure-I and it shall be possible to control the speed at operating speed levels permitted on this gradient.
- 10.5 The brake system shall have ability to stop the train in emergency (quick acting) and full service application without affecting stability of the train during braking.
- 10.6 The brake system shall have stopping ability from a speed after continuous braking for prolonged time during downhill travel.
- 10.7 The brake system shall give satisfactory performance under wet conditions also.
- 10.8 The permitted variation in BC pressure from Distributor Valve between two major schedules will be ± 0.2 kg/cm² for the specified values as mentioned in the specification on account of manufacturer.

11 DESIGN REQUIREMENTS

- 11.1 The Axle Mounted Disc Brake & EP Assist feature offered by the firm shall be compatible with the existing brake system being used for LHB/FIAT design coaches.
- 11.2 The disc brake equipments shall be designed and constructed in such a way that in normal conditions of use and vibrations, to which it may be subjected to, should not cause its premature failure or in any way affect the functional efficiency.
- 11.3 Design of the disc brake equipments shall be such that the performance of the system is not adversely affected under extreme positions of wheel and suspension movements under maximum wear conditions.
- 11.4 The disc brake system shall be of proven design, which has worked successfully in India or International Railway Passenger trains in similar operating conditions. Copies of UIC approval wherever applicable shall be submitted by the firm along with the offer.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 12 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

- 11.5 Equipments should be designed in such a way that it has minimum wear and tear and maintenance possibility.
- 11.6 Each Power Car/SLR/Guard Van/Parcel Van type shall be provided with Flex Ball type parking brakes system having accommodation in Guard's compartment. Parking brakes should brake atleast one bogie (minimum two axle). Parking Brake system shall be latest Proven Design and shall be capable of holding train on steepest and longest down gradient of 1%, when applied from two Power Car/SLR/Guard Van/Parcel Van type coaches. Firm shall submit detailed calculation in this regard.

12 SUBMISSION OF TECHNICAL DOCUMENTS

- 12.1 Firm shall submit the following technical documents/details for axle mounted disc brake equipment at the time of registration to RDSO:
- 12.1.1 Schematic diagram for the pneumatic systems.
- 12.1.2 Descriptive literature explaining the systems.
- 12.1.3 Descriptive literature explaining the individual equipment used in the system.
- 12.1.4 Layout dispositions of all the components/equipments on bogie, underframe and body.
- 12.1.5 QAP for manufacture and supply of Axle Mounted Disc Brake System. The 'Quality Assurance Plan' shall be prepared in accordance with the guidelines given in relevant ISO document of RDSO.
- 12.1.6 Operation and maintenance manual covering instructions, maintenance schedule & list of spares required for all individual items.
- 12.1.7 The complete set of drawings in A1/A2 size for each item of disc brake equipment which shall contain details regarding material specification, dimensions, estimated weight, testing parameters, reference to manufacturing/original collaborator's drawing etc.
- 12.1.8 Electrical wiring diagram.
- 12.1.9 Electrical power requirement i.e. voltage, current (AC/DC) for WSP.
- 12.1.10 Thermal loading details and calculations with the use of disc brakes.
- 12.1.11 Instantaneous/average co-efficient of friction for disc pads for a speed up to 200kmph under different brake pad pressures (should be as per relevant UIC).
- 12.1.12 Braking distance calculations (with & without EP assist feature) at 160kmph (as applicable) as per the rake configuration given in Annexure-I.

13 APPROVAL OF DRAWING

- 13.1 The design/drawing of the disc brake equipment shall be developed based on the technical and performance requirements given in this specification and sound engineering practice. The entire drawing shall be submitted by the firm with technical data and calculations to RDSO for approval.
- 13.2 The drawing shall be developed in SI units.
- 13.3 Material grade/specifications for each component shall be indicated on the relevant drawings of the firm and the firm shall supply copies of translation in English of such specifications/drawings other than Indian standard specifications to purchaser/RDSO.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 13 of 46	Latest (Rev./Amd.) Issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

13.4 Approval of the design means the approval of the general design features. Notwithstanding the approval, the contractor will be wholly responsible for the performance of the disc brake equipment as well as individual components offered.

13.5 Further changes/modifications in the disc brake equipment may be called for with a view to achieve standardization and interchangeability. Firm shall be obliged to incorporate necessary changes in the design of his equipment for this purpose.

14 MANUFACTURE

14.1 Brake Equipments shall be strictly manufactured as per drawing and specification submitted by the manufacturer.

14.2 Equipments to be supplied shall be free from injurious defects that may impair their strength. Contractor shall also ensure that all items are adequately treated and painted (excluding flange faces) to prevent corrosion.

14.3 All parts of brake system shall be given suitable anti-corrosive treatment and painted with two coats of paints with colours as specified by IR before supply (if required). The surface of light alloy castings shall be anodized.

15 INSPECTION

15.1 The complete brake equipment to be supplied by the firm shall be inspected and accepted by the inspecting authority nominated by the purchaser in the supplier's plant. The cost shall be borne by contractor.

15.2 During Prototype development the firm shall offers at least one sets of complete Axle Mounted Disc Brake & EP assist feature equipments to carry out the following test/check:

15.2.1 Checking of dimensions & tolerances, interchangeability of components and general workmanship.

15.2.2 Performance testing of disc brake equipments.

15.3 Contractor shall be responsible for the proper functioning of the disc brake equipment, as per procedure laid down to be mutually agreed to between the contractor and Purchaser.

15.4 Inspection authority shall have access to all detailed manufacturing/original collaborator's drawings for all items of equipment. Contractor shall be obliged to table these drawings as and when called for.

15.5 The inspection authority may deviate from the agreed procedure if and when found necessary to reassure that the material is being furnished in accordance with these specifications. In this regard the contractor shall not be entitled to object on any ground whatsoever on the nature and procedure of testing that may be followed by the inspecting authority.

15.6 During the fabrication, subsequent inspection visit, the brake supplier shall allow IR inspection authority for inspection.

16 FIELD TRIAL

16.1 The disc brake equipments shall be subjected to field trials on minimum 18 coaches (Preferably 1 rake) for a period of minimum 12 months.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 14 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

- 16.2 In case of any modifications carried out by the registered suppliers in the items viz. Brake container module, Distributor Valve, Emergency Brake Accelerator Valve, Passenger Emergency Alarm Valve (PEAV), Passenger Emergency Alarm Signal Device (PEASD), Brake Cylinder, Brake Caliper assembly & Wheel Slide Protection of AMDBS & EP assist feature, the design will be validated in RDSO test lab, thereafter subjected to field trial of 6 months (minimum).
- 16.3 Any modifications found necessary as a result of these tests/trial or further service trials shall be carried out by the manufacturer at their own cost in the coaches in a manner approved by the purchaser/RDSO. All key and manufacturing drawings incorporating the modifications shall be submitted to RDSO for final approval.
- 16.4 After the satisfactory performance of the field trials, the firm may be considered for approval.

17 MARKING

Identification codes (manufacturer's name / trade mark), month/week & year of manufacture and serial number is to be applied to main equipment and subcomponents in a minute, clearly recognizable way; (Plate, label, or stamped, laser marking) to avoid mixing and for settling down warranty claim.

18 PACKING

- 18.1 Supplier shall ensure that all outer parts and exposed threaded portions of the various items of axle mounted disc brake system are suitably covered with protection caps to prevent ingress of foreign matter / damage to threads during handling and storage.
- 18.2 Supplier shall also ensure that all items of disc brake equipment in an assembled condition are adequately packed before dispatch to prevent damage in transporting, handling and storage. The safe transportation shall be the responsibility of manufacturer.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

APPENDIX -A

Specification for Brake Container Module for AMDBS & EPA feature for LHB type coaches**1 SCOPE**

This specification covers the technical requirements related to the performance, inspection and testing of Brake Container Module for axle mounted disc brake system of LHB type coaches and does not include other necessary provisions of the contract.

2 EQUIPMENT DESIGN

- 2.1 The brake container module for AC - Non AC (EOG), AC (SG) and Power Car shall be mounted on the underframe of the vehicle near sidewall using a cradle frame made of stainless steel to AISI 304. Dimensions shown in Drawing No. 110113.0.09.110.001 At-D shall be referred to for envelope size of the equipment including brake control panel. Broad dimension & location of sub-equipment of brake panel shall be as per RDSO drawing no.CG-18088 (Alt.-latest).
- 2.2 The brake container module for AC-Non AC (EOG), AC (SG) and Power Car shall consist of the following components:

S.N.	Description	Qty. /Set	Remarks
I.	Brake Frame	1	
II.	Brake Control Panel	1	
III.	Distributor Valve	1	As per RDSO spec. C-K209/UIC-540 (Appendix-A)
IV.	Control Reservoir 6 ltr.(Min.)	1	
V.	Control Reservoir 5 ltr.(Min.)	1	For Hand Brake only
VI.	Air Filter for BP & FP	2	
VII.	Isolating Cock without vent	2	
VIII.	Isolating Cock with vent	2	
IX.	Check valve	2	
X.	Check valve	1	For Power Car only
XI.	Test Point – BP & FP	2	
XII.	Pressure Gauge for Brake Cylinder (BC) Pressure having dial size of 2 inches with mechanical isolation on 1/4" BSPT for mounting with least count of 0.2 kg/cm ²	1	Appendix – H of spec 02-ABR-02
XIII.	Pressure Gauge for Control Reservoir (CR) Pressure having dial size of 2 inches with mechanical isolation on 1/4" BSPT for mounting with least count of 0.2 kg/cm ²	1	Appendix – H of spec 02-ABR-02

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

XIV.	Pressure switch mounting assembly (in FP line)	1	(1.3 Kg/cm ² falling pressure and 1.8 Kg/cm ² rising pressure)
XV.	Pressure switch	1	
XVI.	Auxiliary reservoir – 125ltr.(Min.) with drain cock (for brake system)	1	
XVII.	Auxiliary reservoir – 75ltr. with drain cock (for CDTs)	1	

2.3 For Double Decker coaches, the brake control panel shall be designed suiting to the space availability. Preferably the reservoirs are to be accommodated in the diamond area whose approach shall be from inside of the coach. Brake Panel shall be made of split type to accommodate outside the diamond area leaving and adequate safe margin from bogie as 200mm and 235mm ground clearance. The mounting frame of control panels and reservoirs shall be stainless steel to AISI 304. RCF Drg. No. DD11235 and Body shell Drg. No. DD10250 shall be referred for envelope size of the Panels and reservoirs. Mounting accessories such as belts etc. for reservoirs and control panels shall be in the scope of the equipment supplier.

2.4 The brake control equipment on underframe for Double Decker Coaches shall consist of the following components:

S.N.	Description	Qty. /Set	Remarks
I.	BP Panel assembly	1	
II.	FP Panel assembly	1	
III.	Distributor Valve	1	As per RDSO spec. C-K209/UIC-540 (Appendix-A)
IV.	Control Reservoir 6 ltr.(Min.)	1	
V.	Air Filter for BP & FP	2	
VI.	Isolating Cock without vent	2	
VII.	Isolating Cock with vent	2	
VIII.	Check valve	2	
IX.	Test Point – BP, FP, BC & CR	4	
X.	Pressure switch mounting assembly (in FP line)	1	
XI.	Pressure switch (1.3 Kg/cm ² falling pressure and 1.8 Kg/cm ² rising pressure)	1	
XII.	Auxiliary reservoir – 125 ltr.(Min.) with drain cock (for brake system)	1	
XIII.	Auxiliary reservoir – 75 ltr. with drain cock (for CDTs)	1	
XIV.	Strap for 125 ltr. (Min.) reservoir	1	
XV.	Strap for 75 ltr. reservoir	1	

2.5 The brake control panel shall be made of Aluminum Alloy/Stainless steel to AISI 304 with fittings on specified location.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 17 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

- 2.6 All the accessories to be mounted on brake control panel shall be of panel mounted type so that they can be easily mounted and removed from the panel.
- 2.7 The brake container module shall be protected against track stone hitting, dust, rain and salt-water influences.
- 2.8 Sizes of pipes as shown in Alstom Drawing Nos. 1 10113.0.09.100.002 Alt-D, 1 10113.0.09.100.003 Alt-B, 1 10113.0.09.100.004 Alt-C and 1 10113.0.09.100.005 Alt-C for various connections shall be used. These drawing are only for the purpose of guidance with regard to size of pipes.
- 2.9 The distributor valve (DV) shall be mounted on the panel through intermediate piece with isolating cock which shall form part of the DV or intermediate piece or could be directly mounted on the panel.
- 2.10 The various pipe connections should as far as possible be located on top of the brake panel.
- 2.11 The weight of brake panel with and without components shall be indicated.
- 2.12 The layout of the various apparatus etc. on the brake panel shall be finalized in consultation with the RDSO.
- 2.13 Test points shall be provided on the brake control panel to measure pressures of brake cylinder, auxiliary reservoir, control reservoir and brake pipe.
- 2.14 The material of all reservoirs/pressure tanks shall be of stainless steel to AISI 304.
- 2.15 The cradle shall be made of stainless steel to AISI 304 with wire-mesh of stainless steel at the bottom. All the critical Isolating cocks at front location in the control panel shall be covered with Stainless Steel mesh with sliding door arrangements to prevent their operation by unauthorized persons.
- 2.16 The control panels shall be designed and constructed in such a way that in normal conditions of use and vibrations, to which it may be subjected to, should not cause its premature failure or in any way affect the functional efficiency.
- 2.17 The manufacturer shall either fix a name plate or engrave below every fitting on control panel which should last as long as the control panel.

3 MECHANICAL INTERFACES

- 3.1 All piping of underframe to Brake Control Panel & Air suspension control panel shall be of ferrule type.
- 3.2 The supplier specifies the single weights (which can be summarized appropriately) of all components of the brake control panel to be mounted to the car body in order to guarantee the mechanical strength of the connecting points.
- 3.3 The supplier shall guarantee all internal interfaces of the brake equipment.
- 3.4 If the components included in the scope of delivery of the brake supplier are to be connected with the brake pipes of the car body and/or the bogie, they are to be suitable for ferrule type connections.

4 MANUFACTURE

- 4.1 Brake container module shall be manufactured as per drawing and specification submitted by the manufacturer.
- 4.2 Equipment to be supplied shall be free from injurious defects that may impair their strength. The firm shall also ensure that all items are adequately treated and painted (excluding flange faces) to prevent corrosion.
- 4.3 All parts of Brake Container Module shall be given suitable anti-corrosive treatment if required, painted with two coats of paints with colors as specified by IR before supply. The surface of light alloy castings shall be anodized.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 18 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

5 PURCHASE INSPECTION

- 5.1 The purchase inspection shall be carried out at the firm's premises who are cleared for the regular manufacture and registered with the RDSO for manufacture and supply of Brake container module.
- 5.2 The inspecting authority shall make audit checks of the manufacturing procedure/"Internal Quality Assurance System" to ensure that the brake container module offered for inspection is manufactured strictly as per "Internal Quality Assurance System" and the manufacturer has carried out all the tests/inspection during manufacturing stage to ensure that brake container module offered are strictly to the specification and drawings. During such audit checks the Inspection Authority shall also see from the records of 'Internal Quality Assurance' that the Raw material used for the manufacture of brake container module is as per specification laid down.
- 5.3 Inspection Authority will ensure that each Distributor Valve has been tested by the manufacturer as per clause 7.2 of the RDSO specification C-K209 before fitment on the brake control panel. Manufacturer shall have to maintain the internal tests record and submit against the Inspection Authority at the time of inspection.
- 5.4 Inspection Authority will ensure that each Brake container module has been tested by the manufacturer as per clause 6.0 of this specification. Manufacturer shall have to maintain the internal tests record and submit against the Inspection Authority.
- 5.5 The Inspection Authority shall conduct the following checks/tests of the Brake container from a lot of 50 coach set or part thereof.
- 5.5.1 2% or minimum two numbers Brake container module picked up at random shall be checked for dimensions and tolerances, interchangeability of components, general workmanship and surface finish as per RDSO approved drawings.
- 5.5.2 10% or minimum two numbers Brake container module picked up at random shall be subjected to performance tests as given at clause 6.0
- 5.6 In case the samples picked up fails in any of the tests/checks indicated at clause 5.5.1 & 5.5.2, the entire lot of the brake container module shall be rejected by the Inspecting Authority.
- 5.7 Inspecting authority shall have access to all detailed manufacturing / original collaborator's drawings for all items of equipment. The firm shall be obliged to provide these drawings as and when called for.
- 5.8 The inspecting authority may deviate from the agreed procedure if and when found necessary to re-assure that the material is being furnished in accordance with these specifications. In this regard the manufacturer shall not be entitled to object on any ground whatsoever on the nature and procedure of testing that may be followed by the inspecting authority.
- 5.9 During the fabrication, subsequent inspection visit, the brake supplier shall allow IR Inspection Authority for Inspection.

6 PERFORMANCE TESTS

- 6.1 The Brake container shall be mounted on the test bench and tested for the following features. All the test shall be conducted with twin pipe system except the test mentioned at S.No.6.1.2 which shall be carried out with single pipe system.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

S.N.	Check	Specified Values	As Observed
6.1.1	Leakage Test for Brake Control Panel Assembly Leakage from mounting of sub-assemblies and components at air pressure of 10 Kg/cm ²	No leakage	
6.1.2	Charging Time (with single pipe only) a) Time for auxiliary reservoir (AR) pressure to rise from 0 to 4.8 kg/cm ² . b) Time for Control reservoir (CR) pressure to rise from 0 to 4.8 kg/cm ² .	- -	
6.1.3	Leakage from mounting of sub- assemblies during I) Release II) Service Application III) Emergency	No leakage No leakage No leakage	
6.1.4	Full Service Application & Release i) BC Filling time from 0 to #2.8 kg/cm ² under service application with eight brake cylinders of 255 mm dia. ii) BC Release time from *3.0±0.1 to 0.4 kg/cm ² after service application with eight brake cylinders of 255 mm dia. iii) Maximum Brake Cylinder pressure	3 - 5 Sec 15 - 20 Sec *3.0 ± 0.1 kg/cm ²	
6.1.5	Emergency Application & Release i) BC Filling time from 0 to #2.8 kg/cm ² under emergency application with eight brake cylinders of 255 mm dia. ii) BC Release time from *3.0±0.1 to 0.4 kg/cm ² after emergency application with eight brake cylinders of 255 mm dia. iii) Maximum Brake Cylinder pressure	3 - 5 Sec 15 - 20 Sec *3.0 ± 0.1 kg/cm ²	
6.1.6	Graduated Application & Release Test i) Brake Cylinder pressure attained when Brake pipe pressure is reduced in steps (at least seven steps). ii) Brake Cylinder pressure attained when Brake pipe pressure is increase in steps (at least seven steps). iii) Brake pipe pressure when cylinder pressure is 0.4 kg/cm ² .	- - 4.85 kg/cm ² (Approx.)	
6.1.7	Sensitivity Test Response of brakes when Brake pipe (BP) pressure is reduced at a rate of 0.6 kg/cm ² in six seconds when BP is isolated from main reservoir.	Brake should apply within 6 Sec	
6.1.8	Insensitivity Test Response of brakes when Brake pipe (BP) pressure is reduced at a rate of 0.3 kg/cm ² in 60 seconds when BP is isolated from main reservoir.	Brake should not apply	
6.1.9	Refeeding Test Response of valve when Brake cylinder pressure is slowly exhausted by 2mm choke	Refeeding should be available	

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 20 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

6.1.10	Over Charge Protection Test Overcharge Brake Pipe (BP) to 6 kg/cm ² after full service application	Control Reservoir pressure Should not rise within 10 sec.	
6.1.11	Bogie Isolation Test for Brake control panel Increase the BC pressure to *3.0±0.1 kg/cm ² in 3-5 sec. i) Turn the first bogie Isolation Cock to close position. BC1 Pressure Gauge should show zero pressure. ii) Turn the second bogie Isolation Cock to close position. BC2 Pressure Gauge should show zero pressure. iii) Turn the first bogie Isolation Cock to open position. BC1 Pressure Gauge should show *3.0±0.1 kg/cm ² pressure. iv) Turn the second bogie Isolation Cock to open position. BC2 Pressure Gauge should show *3.0±0.1 kg/cm ² pressure.	OK OK OK OK	
6.1.13	Toilet Cock Isolation Test Open cock for toilet on panel. Check the pressure gauge for pressure	It should show 6Kg/cm ²	
6.1.14	Quick Release Valve Test Automatic exhausting of Brake Cylinder and Control reservoir test of quick release valve	@CR & BC pressure should automatically exhaust to zero	
6.1.15	Hand Brake Cock Isolation & Reservoir Leakage Test (In Power Car only) Check leakage from the connection on reservoir	No leakage	

(#): For Double Decker Coach BC filling time shall be recorded from 0 to 3.6 kg/cm²

(*): For Double Decker Coach max BC pressure shall be 3.8 kg/cm²

(@): In case of any ambiguity regarding parameters above, provisions mentioned in relevant UIC shall be used for guidance.

Note:- Specified values of test Indicated at clause 6.1.2(a), 6.1.2(b) & 6.1.6 (i) & (ii) shall be furnished by the manufacturer and approved by RDSO.

6.2 Testing of Auxiliary Reservoir of 125ltrs (Min.) and 75ltrs shall be carried out as per Clause 7.0 of Appendix-C of 02-ABR-02.

6.3 The purchaser/Inspection Authority may specify any other test to satisfy himself for the performance of the requirements and manufacturer shall assist for conduct of these tests.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

APPENDIX- B

Specification for Brake Cylinder for AMDBS & EPA feature for LHB type coaches**1. SCOPE**

This specification covers the technical requirements related to performance, Inspection and testing of Brake Cylinder to be used for Axle Mounted Disc Brake system of LHB type coaches and does not include other necessary provisions of the contract.

2. EQUIPMENT DESIGN

- 2.1 The brake cylinder with automatic wear adjustment serves in the operation of the brake clasp of the disc brake.
- 2.2 The brake cylinder shall be built with a compact, simple method and small dimensions. It is suitable for installation in brake caliper for axle mounted brake discs.
- 2.3 The main characteristic of the cylinder is the built-in power controlled wear adjustment mechanism. It acts as a single-acting play regulator and performs unaffected by the spring-action elongation of the brake caliper, which is dependent on brake power. During the braking process, the regulator quickly and automatically corrects the play in the brake shoe, which has been enlarged due to wear, in the entire area of adjustment.
- 2.4 Play in the brake cylinder remains constant. The piston stroke remains largely constant. Manual regulation of the brake cylinder/brake caliper is not required.
- 2.5 The brake cylinder shall be provided with a spindle release device, which allows, simple replacement of the used brake linings.
- 2.6 Basic parameters of the brake cylinder shall be as under:
- | | |
|------------------|------------------------|
| Piston Strokes | 21 mm (max.) |
| Slack capacity | 120 mm (min.) |
| Cylinder size | 10" |
| Max. BC pressure | 3.9 Kg/cm ² |
- 2.7 Air connection to brake cylinder shall be through 15 mm diameter pipe.
- 2.8 All parts of brake cylinder shall be design for fatigue strength (with the exception of parts subject to wear).
- 2.9 A minimum true specific weight for the brake cylinder is of great importance.
- 2.10 The weight of brake cylinder must be evident on the drawing.
- 2.11 A drop in pressure in the service brakes shall not exceed 0.1 Kg/cm² within 10 minutes.
- 2.12 All moveable parts (such as spindles) are to be provided with an appropriate protective covering. If bellows are used, they must be heat and flame resistant.
- 2.13 The functioning of the brake cylinders must be guaranteed against wear, corrosion and leakage. The permissible limits for wear, corrosion and leakage are to be specified by the supplier.
- 2.14 The brake cylinder is to be protected from water infiltration due to splashing of water in rainy seasons or water wash of the coach at station/sick line.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 22 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

- 2.15 For brake lining replacement, an easy-operated release device is to be provided for the wear adjustment mechanism.
- 2.16 The return device must be easily accessible.
- 2.17 The type of release must be evident on the drawing.
- 2.18 It must not be possible for the release device to release unintentionally, such as from vibrations or blows.
- 2.19 Even when used in a counter-clockwise manner (wrong direction of turn), no damage should be caused to the return device.

3. DIMENSIONS AND TOLERANCES




- 3.1 For all coaches, brake cylinder shall come within the space as shown in FIAT-SIG Drawing No. 1268820 and for one bogie of power car and second class luggage cum guard coach FIAT-SIG drawing no. 1272116 will be applicable.
- 3.2 Fixing arrangement of calipers with brake cylinder piston and brake cylinder body shall be as per RCF Drg. No. MI000524. Tenderer may please take note of the fixing hole size etc. as shown in this drawing.
- 3.3 The dimensions and tolerances of Brake cylinder shall be as indicated in the RDSO/OEMs approved drawings.
- 3.4 Discrepancies in dimensions if noticed shall be brought to the notice of RDSO at the developmental stage and sorted out.

4. MANUFACTURE

- 4.1 Brake Cylinder shall be manufactured as per drawing and specification submitted by the manufacturer.
- 4.2 Brake cylinder to be supplied shall be free from injurious defects that may impair their strength. The firm shall also ensure that all items are adequately treated and painted to prevent corrosion.
- 4.3 All parts of Brake Cylinder shall be painted with two coats of paints in grey or black colours or as specified by IR before supply. The surface of light alloy castings shall be anodized.

5. PURCHASE INSPECTION

- 5.1 The purchase inspection shall be carried out at the premises of manufacturers who are cleared for the regular manufacture of Brake cylinder. The following procedure shall be followed for the purchase inspection: -
- 5.1.1 The Inspecting authority shall make audit checks of the manufacturing procedure/"Internal Quality Assurance System" to ensure that the brake cylinder offered for inspection is manufactured strictly as per "Internal Quality Assurance System" and the manufacturer has carried out all the tests/inspection during manufacturing stage to ensure that brake cylinder offered are strictly to the specification. During such audit checks the Inspecting Authority shall also see from the records of 'Internal Quality Assurance' that the Raw Material used for the manufacture of brake cylinder is as per specification laid down.
- 5.1.2 The Inspecting Authority shall conduct the following checks from a lot of not more than 50 Nos.
- 5.1.2.1 Two percent brake cylinder picked up at random shall be checked for dimensions with respect to assembly drawing.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 23 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

- 5.1.2.2 Two percent or minimum one brake cylinder shall be dismantled and dimensions and general workmanship of each component checked as per RDSO approved drawings.
- 5.1.2.3 Ten percent brake cylinder picked up at random shall be subjected to tests as given at clause 6.1 of this specification.
- 5.1.2.4 Two piston packing per every contract shall be tested for conformity with UIC code 831-R. In case piston packing is imported from OEM, test certificate should be produced.
- 5.1.3 In case the samples picked up fail in any of the tests/checks indicated in clause 5.1.2.1 to 5.1.2.3 the reasons for such failure shall be identified. The Inspecting Authority shall verify the reasons by conducting audit check on 'Internal Quality Assurance System'. If it is found that such failures are due to non-implementation of 'Internal Quality Assurance System' the entire lot of brake cylinders shall be rejected. In case the failures are on account of reasons other than non-implementation of 'Internal Quality Assurance System' the manufacturers may re-offer the lot after rectifying the defects. However, in such cases, double the quantity of the samples shall be picked up and tests/checks conducted as clause 5.1.2.1 to 5.1.2.4. In case the samples again fail in any of the tests/checks the entire lot shall be rejected.

6. TESTS

6.1 Leakage & Function Test for Brake Cylinder complete

- The brake cylinder shall be mounted on the fixture to limit the piston stroke to 21mm. Apply 0.7 kg/cm² air pressure and observe the leakage is not exceeded 0.1 kg/cm² in 10 minutes.
- Adjust the piston stroke to 21 mm and apply 3.8 kg/cm² air pressure and observe the leakage is not exceeded 0.1 kg/cm² in 10 minutes.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 24 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

APPENDIX- C

Specification for Brake Caliper Assembly for AMDBS & EPA feature for LHB type coaches

1. SCOPE

This specification covers the technical requirements related to performance, Inspection and testing of Brake Caliper Assembly for Axle Mounted Disc Brake system of LHB type coaches and does not include other necessary provisions of the contract.

2. EQUIPMENT DESIGN

- 2.1 The Brake Caliper serves in the transmission of power from the brake cylinder to the brake disc for certain braking processes and powers.
- 2.2 The Brake Caliper is built with a compact, simple method and to be designed so as to provide simple assembly and disassembly, in particular of the brake linings as well as bolts and sockets.
- 2.3 The Brake Caliper is connected with spring action to the bogie structure over the caliper yoke support and drag link support.
- 2.4 A minimum true specific weight for the Brake Caliper is of great importance.
- 2.5 All parts shall be designed for fatigue strength.
- 2.6 All hinged supports and exposed parts are to be provided with lubricant or appropriate corrosion protection.
- 2.7 Stainless steel pins with non-metallic self-lubricating property bushes, which have long life are to be used in brake calipers for better operation & maintainability where applicable.
- 2.8 For reasons of weight, brake levers for calipers without locking brakes have been built in a lighter version, possible due to the absence of interfering force. An exchange of the two brake calipers must be prevented with a simple construction measure.
- 2.9 The forces and loads are evident on the braking calculation.
- 2.10 The kinematic movements of the brake lining with respect to the brake disc must be examined by the manufacturer for all operational instances. Floatation of the brake caliper must be guaranteed for all operational conditions.
- 2.11 Brake Calipers shall give effective brake radius of 247 mm with lever ratio of 2.17 per disc for all types of coaches except for Generator/Power Car/SLR/Guard Van/Parcel Van type and Double Decker coaches for which caliper ratio is to be 2.48.
- 2.12 Brake Calipers shall be suitable for operation with brake cylinders as specified in Appendix-B.
- 2.13 The brake Pad holder is designed for the installation of the brake Pad according to UIC 541-3.
- 2.14 The brake Pad holder is provided with a simple, safe device for Pad arrest and Pad replacement.
- 2.15 The size of the brake Pad holder is evident on the braking calculation.
- 2.16 If special Pads are used, confusions with normal Pads are to be excluded by using simple constructive measures.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 25 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

3. DIMENSIONS AND TOLERANCES

3.1 Manufacturer shall ensure that Brake caliper assembly offered by them shall be suitable for mounting in space as shown in RCF Drawing No. 1268820, 1272112 and 1272116 (Power car) and shall be able to be mounted on mounting brackets and hole sizes shown in these drawings including Bogie frame drawing No. 1267401 201 version-04.

3.2 Brake caliper assembly shall be suitable for fitting UIC type 200x2 cm² brake pads of thickness 35 mm.

4. MANUFACTURE

4.1 Brake caliper assembly shall be manufactured as per drawing and specification submitted by the OEMs/Collaborator.

4.2 Brake caliper assembly to be supplied shall be free from injurious defects that may impair their strength. The firm shall also ensure that all items are adequately treated and painted (excluding flange faces) to prevent corrosion.

4.3 All parts of Brake Caliper assembly shall be painted in grey or black colors with two coats of paints or as specified by IR before supply.

4.4 All hinged supports and exposed parts are to be provided with lubricant or appropriate corrosion prevention.

5. PURCHASE INSPECTION

5.1 The purchase inspection shall be carried out at the premises of the manufactures who are cleared for the regular manufacture of Brake Caliper assembly and registered with RDSO. The following procedure shall be followed: -

5.2 The Inspecting Authority shall make audit checks of the manufacturing procedure 'Internal Quality Assurance System' to ensure to that the Brake Caliper assembly offered for inspection is manufactured strictly as per 'Internal Quality Assurance System' and the manufacturer has carried out all the tests inspection during manufacturing stage to ensure that the Brake Caliper assembly as well as their components are manufactured strictly to the specification/drawing and quality standard of the collaborator. During audit checks the inspection Authority shall see from the records of 'Internal Quality Assurance' that the Raw material used for the manufacture of Brake Caliper assembly is as per specification laid down.

5.3 Inspection Authority will ensure that each Brake Caliper Assembly has been tested by the manufacturer as per clause 6.0 of this specification. Manufacturer shall have to maintain the internal tests record and submit against the Inspection Authority.

5.4 The Inspection Authority shall conduct the following checks/tests of the Brake Caliper from a lot of 100 Nos. or part thereof.

5.4.1 2% or minimum two numbers Brake Caliper Assembly picked up at random shall be checked for dimensions and tolerances, interchangeability of components, general workmanship and surface finish as per RDSO approved drawings.

5.4.2 10% or minimum five numbers Brake Caliper Assembly picked up at random shall be subjected to tests as given at clause 6.0

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 26 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

- 5.5 In case the samples picked up fails in any of the tests/checks indicated at clause 5.4.1 & 5.4.2, the entire lot of the Brake Caliper assembly shall be rejected by the Inspecting Authority.
- 5.6 Inspecting authority shall have access to all detailed manufacturing / original collaborator's drawings for all items of equipment. The firm shall be obliged to show these drawings as and when called for.
- 5.7 The inspecting authority may deviate from the agreed procedure if and when found necessary to re-assure that the material is being furnished in accordance with these specifications. In this regard the manufacturer shall not be entitled to object on any ground whatsoever on the nature and procedure of testing that may be followed by the inspecting authority.
- 5.8 During the fabrication, subsequent inspection visit, the brake supplier shall allow IR Inspection Authority for Inspection.

6. TESTS

6.1 Torque Test

- 6.1.1 Check the tightening torque of nut on hanging link, pad holder, Bridge Piece, Brake lever and Hex head screw with the torque wrench. The tightening torque should not be less than the value as specified in drawing/specification approved by RDSO.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

APPENDIX- D

Specification for Passenger Emergency Alarm system for AMDBS & EPA feature for LHB type coaches

1. SCOPE

This specification covers the technical requirements related to performance, Inspection and testing of Passenger Emergency alarm system for LHB type coaches and does not include other necessary provisions of the contract.

2. EQUIPMENT DESIGN

- 2.1 Design of the passenger emergency alarm system for LHB type coaches shall conform to UIC 541-1 & UIC 543.
- 2.2 Passenger Emergency Brake Valve is to be directly connected to the Brake Pipe.
- 2.3 Passenger Emergency Brake valve is to be operated through the emergency brake pull box.
- 2.4 The design of the passenger alarm system shall be such that as the handle of passenger emergency brake pull box is moved the air pressure in brake pipe will be exhausted via large orifice (at least 19mm diameter cross section) of passenger emergency Brake valve.
- 2.5 Emergency Brake valve must be designed in such a way that, when the alarm signal is triggered, the pressure in the train pipe falls rapidly to 2 Kg/cm² (+0/-0.5 Kg/cm²) and remains at that level thereafter.
- 2.6 There should be provision of an Isolating cock on branch pipe connecting to Brake Pipe to the Passenger Emergency Valve.
- 2.7 Passenger emergency alarm system shall be reset by a guard's key. The guard's key for passenger emergency alarm resetting shall be 8mm square.
- 2.8 The alarm signal resetting device must be placed inside the vehicle and easy to operate from there. It must be designed in such a way that passengers are not able to activate it.
- 2.9 Each passenger emergency pull box shall be provided with pilot valve and micro switch & indication LED.
- 2.10 The electrical wiring with standardized color coding (indicated below) and 'Push Wire single pole Wago connectors' to be used in Passenger Emergency Alarm Pull Box.

S.N.	Wire	Color
1	Positive (+ve)	Red
2	Negative (-ve)	Black
3	Return (Common)	Blue

- 2.11 Positive and negative wires should be separated in the PEASD (Passenger Emergency Alarm Signal Device) in separate standard make conduits.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhin Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 28 of 46	Latest (Rev./Amnd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	---------------------------------------	------------------------------------

3. PURCHASE INSPECTION

- 3.1 The purchase inspection shall be carried out at the premises of the manufactures who are cleared for the regular manufacture of Passenger Emergency Brake Valve and Passenger Emergency Alarm Pull Box and registered with RDSO. The following procedure shall be followed:
- 3.1.1 The Inspecting Authority shall make audit checks of the manufacturing procedure 'Internal Quality Assurance System' to ensure to that the Passenger Emergency Brake Valve and Passenger Emergency Alarm Pull Box offered for inspection is manufactured strictly as per 'Internal Quality Assurance System' and the manufacturer has carried out all the tests inspection during manufacturing stage to ensure that the Passenger Emergency Brake Valve and Passenger Emergency Alarm Pull Box are manufactured strictly to the specification /drawing and quality standard of the collaborator.
- 3.2 After having satisfied about the quality standards, 10% of each lot of 100 Passenger Emergency Brake Valve and Passenger Emergency Alarm Pull Box shall be tested as per procedure given in clause 4.

4. TESTS

4.1 PASSENGER EMERGENCY BRAKE VALVE

- 4.1.1 The valve is tested on the test bench by connecting the portion provided for brake pipe side and the outlet portion should be connected to PEAPB or a pipe line with isolating cock with suitable choke provided. Charge the valve to a pressure of 10kg/cm² (± 0.2 kg/cm²). There should not be any leakage if checked with soap water.
- 4.1.2 Now exhaust the outlet portion through PEAPB or Isolating cock, the air should start escaping through the large orifice (at least 19mm diameter) provided on the valve. The pressure should not fall below 2Kg/cm² (± 0.5 Kg/cm²) and remains at that level thereafter.

4.2 PASSENGER EMERGENCY ALARM PULL BOX (PEAPB)

- 4.2.1 The Passenger Emergency Alarm Pull Box is tested on the test bench. Apply air at a pressure of 10 kg/cm² through the portion provided for the connection to PEAPB and check for the leakage with soap water.
- 4.2.2 Now pull the alarm handle of this valve. The air should start escaping through the exhaust provided in the pilot valve.
- 4.2.3 Check for resetting of alarm signal device by alarm valve reset key.
- 4.2.4 The PEAPB shall be tested for type tests (for reliability of electronic items as per RDSO spec. ELRS/SPEC/SI/0015) & routine tests (like IR, HV, over voltage protection, burn in tests for electrical items including connecting cables etc.).
- 4.2.5 For safety of the electrical wire cables in pull box and to avoid damage during fitment, the following points must be ensured-
- Length of cable to be kept approx. 25mm.
 - Provision of WAGO type connector similar to WAGO Part No. 224-101
 - Ferrule No. for easy identification of wires.
 - Heat Shrinkable sleeve over wires to protect it from external damage.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 29 of 46	Latest (Rev./Amd.) Issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

APPENDIX- E

Specification for Emergency Brake Accelerator Valve for AMDBS & EPA feature for LHB type coaches

1. SCOPE

This specification covers the technical requirements related to performance, inspection and testing of Emergency Brake Accelerator Valve for LHB type coaches and does not include other necessary provisions of the contract.

2. EQUIPMENT DESIGN

- 2.1 The emergency brake accelerator valve is mounted into the brake pipe.
- 2.2 The emergency brake accelerator valve sense the fast pressure reduction of brake pipe in emergency brake application and vents the brake pipe via large orifice. This causes an equal brake pressure reduction speed over the whole train in the brake pipe.
- 2.3 The emergency brake accelerator will stop to vent the brake pipe between pressure of 2.5 and 1.5Kg/cm².

3. DIMENSIONS AND TOLERANCE

- 3.1 The mounting arrangement of emergency brake accelerator valve in LHB coach underframe shall be as per Alstom Drawing No.1 10113.0.09.100.004. Tenderer may please take note of the fixing holes size etc. as shown in this drawing. Dimensions of the equipment should within space envelope shown in above drawing.

4. PURCHASE INSPECTION

- 4.1 The purchase inspection shall be carried out at the premises of the manufactures who are cleared for the regular manufacture of Emergency Brake Accelerator Valve and registered with RDSO. The following procedure shall be followed:
 - 4.1.1 The Inspecting Authority shall make audit checks of the manufacturing procedure 'Internal Quality Assurance System' to ensure to that the Brake Accelerator Valve offered for inspection is manufactured strictly as per 'Internal Quality Assurance System' and the manufacturer has carried out all the tests inspection during manufacturing stage to ensure that the Emergency Brake Accelerator Valve as well as their components are manufactured strictly to the specification /drawing and quality standard of the collaborator.
 - 4.1.2 After having satisfied about the quality standards, 10% of each lot of 100 Brake Accelerator Valve shall be tested as per procedure given in Clause 5.

5. TESTS

5.1 Leakage Testing

- 5.1.1 The emergency brake accelerator valve is tested on the test bench. Charge the valve to a pressure of 10kg/cm²(±0.2kg/cm²). There should not be any leakage in vent hole if checked with soap water.

5.2 Functional Testing

5.2.1 Insensitivity Test

- 5.2.1.1 BP pressure to be reduced at the rate from 5.0 to 3.2 Kg/cm² in 6sec, the air should not start escaping through the exhaust provided on the valve.

5.2.2 Sensitivity Test

- 5.2.2.1 BP pressure to be reduced at the rate from 5.0 to 3.2 Kg/cm² in 3sec, the air should start escaping through the exhaust provided on the valve.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 30 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

APPENDIX- F

Specification for Wheel Slide Protection Unit AMDBS & EPA feature for LHB type Coaches

1. SCOPE

This specification covers the technical requirements related to Wheel slide protection Unit (WSP) used on Axle Mounted Disc Brake system for LHB type coaches and associated components (Dump Valve, Speed Sensor, Phonic Wheel, Junction Boxes etc.) and does not include other necessary provisions of the contract.

2. PARTICULAR REQUIREMENT

- 2.1 The WSP Unit is to be approved by UIC and is to meet the corresponding requirements especially UIC 541-05.
- 2.2 The WSP Unit shall retain full functionality, regardless of the braking force requested, up to a speed 20% greater than the maximum running speed of the vehicle for which it is designed.
- 2.3 The WSP Unit shall function reliably from maximum speed to a minimum speed of approx. 5 Km/h.
- 2.4 The WSP Unit shall function reliably independent of the moving direction.
- 2.5 The WSP Unit shall have provision for automatically switch on and switch off for electrical supply to WSP Unit on receiving an electrical signal from pressure switch mounted in FP line in Brake Control Panel when the coaches are not in use.
- 2.6 The WSP Unit shall have additional output lines for attachment of speedometer, vacuum toilet system and door sub-systems.
- 2.7 The WSP shall so vary the braking force as to make maximum use of available adhesion and improve it by providing controlled wheel slide.
- 2.8 The WSP Unit is to guarantee a sufficient and safe operation. Moreover, a failure of the WSP Unit should not have any influence on the braking function of this vehicle or of the whole train set.

3. EQUIPMENT DESIGN

- 3.1 The WSP unit shall consist of the following components:
 - 3.1.1 Microprocessor-based control unit (1 pc) consisting of the following
 - I. Power Supply
 - II. Control Unit
 - III. Micro processor
 - IV. Input/Output
 - 3.1.2 Speed sensors (with cable of suitable length) with integrated amplifier (4 Pc) and mounting bracket
 - 3.1.3 Connector Plug (1set)
 - 3.1.4 Anti-Skid Valve / Dump Valve (4 Pc)
 - 3.1.5 Junction boxes with mil-grade connectors & plugs for speed sensors and Dump valves (4 pcs)

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 31 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

- 3.1.6 Housing (4 pcs)
- 3.1.7 Phonic Wheels (4 pcs) with M8 bolts to IS:1364 Pt.III clause 10.9 and washers to IS:3063 type B.
- 3.1.8 Cable for complete wiring of WSP system.
- 3.1.9 Pressure switch (1 pc) 1.3/1.8 Kg/cm² in FP line (if necessary to switch on/off the WSP depending on the pressure).
- 3.2 The WSP Unit should have sturdy design, long maintenance intervals and easy to repair.
- 3.3 The WSP Unit has to work axle-selective, that means it has to be a four-axle/four channel configuration.
- 3.4 It is to be ensured, that manual correction for wheel diameter is not required by WSP.
- 3.5 The microprocessor wheel slide protection shall have additional module for kilometre performance. So that total kilometre earned by the coach (WSP unit) can be recorded and it can be correlated with the Error Code.
- 3.6 The microprocessor unit housing shall have a standard 19" rack for the minimal execution. Supplier shall indicate maximum temperature and humidity for safe working of his equipment. The unit is proposed to be mounted in non-air conditioned area of the coaches.
- 3.7 WSP software for downloading WSP fault and event logged data shall be provided free of cost by the firm to the user Railways i.e., coaching depots and workshops in sufficient numbers as demanded. Fault data can be downloaded to any Windows laptop/computer using Ethernet cables with RJ45 (on laptop side) to M12 connectors (on panel side). WSP software should have suitable user friendly interface and should store at least the following data w.r.t. time and date for minimum period of three months.

a) WSP errors/faults as per Standard errors codes given below:

Error Description	Error Code
Speed Sensor Failure (Open/Short Circuit) Axle 1, Axle 2, Axle 3 & Axle 4	0011, 0021, 0031 & 0041
Speed Sensor Failure (Gap/Frequency) Axle 1, Axle 2, Axle 3 & Axle 4	0012, 0022, 0032 & 0042
Dump Valve Failure (Short Circuit) Axle 1, Axle 2, Axle 3 & Axle 4	0013, 0023, 0033 & 0043
Dump Valve Failure (Open Circuit) Axle 1, Axle 2, Axle 3 & Axle 4	0014, 0024, 0034 & 0044
Transient Error	0095
O.K.	0099

- b) Dump valve activities with date & time in a customized time period (like in a month, quarterly, yearly etc.); Axle number and reference speed/speed of all four axles.
- c) There shall be provision of continuous recording and storage of speed of all the four axles for minimum 10,000 kms. The sampling rate of data recording should be 100 ms with continuous recording of minimum 30 minutes.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

- 3.8 Supply voltage to microprocessor rack shall be 110V DC nominal.
- 3.9 The supply of the microprocessor shall switch-off automatically after a certain period of time when the vehicle is not in use.
- 3.10 There shall be a dedicated switch/single operation push button for self-test of WSP health and further simple scrolling switch to view the errors including transient errors.
- 3.11 There shall be standard colour codes (indicated below) of wire as standardised by RDSO for easy identification. Also proper ferrule marking to be provided as per approved numbering plan.

S.N.	Wire	Color	Item
1	Positive (+ve)	Red	Speed Sensor
2	Negative (-ve)	Black	
3	Signal	White	
4	Holding	Yellow	Dump Valve
5	Exhaust	Grey	
6	Return (Common)	Green	

- 3.12 Wheel slide protection system shall employ phonic wheel of 80 teeth fitted on to Security disc to FIAT-SIG Drg. No. 1902094 ver-04 on the one end of each axle as shown in FIAT-SIG drawing No. 1268823 ver-02. For the purpose of standardization and enabling physical interfacing with the bearings, it is desirable that the phonic wheel should be as per Parizzi Drawing No. V12014.
- 3.13 Axle box mounted speed sensor (one for each axle) shall be employed as a transmitter and shall fulfil the requirements of this specification. In order to achieve physical interfacing of speed sensor with front cover of axle box and phonic wheel, the sensor shall be fitted in the front cover as per FIAT-SIG Drawing no. 1902713 ver-06 and 1902714 ver-07. The tenderer shall ensure that a gap of 0.9 to 1.4mm between phonic wheel and speed sensor shall be maintained for proper functioning of the wheel slide protection system.
- 3.14 The speed sensor should have the following characteristics:
- Protection against mechanical damage.
 - Resistance to corrosion.
 - Durable and maintenance free.
 - Protection against HF interference.
 - Temperature range from -5 deg. C to + 60 deg. C.
 - Protection on all input and output against reverse polarity, and short circuit connection.
 - Constant output signal, when stationary for functional diagnosis.
 - Permissible insulation test voltage of 1500 VAC and 50 Hz for one minute.
 - Blank flange with cover.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 33 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

3.15 The WSP wiring layout & Junction Boxes shall be as per RDSO drawing no. CG-18246 & CG-19005 with latest alterations.

3.16 Design & Wiring scheme for Junction Boxes (as approved by the PUs/RDSO) shall be used.

4. ENVIRONMENTAL AND AMBIENT CONDITIONS

4.1 Environmental and Ambient Conditions for the WSP Unit

4.1.1 Climatic Conditions

4.1.1.1 All materials selected must withstand these external influences during their lifetime without any restrictions on their function and safety.

4.1.2 Protection against Corrosion

4.1.2.1 Due to the climatic conditions defined above, protection against corrosion as well as an anticorrosive design and material selection are of special importance for the parts and components of the WSP Unit and must be realized accordingly. All WSP components to be arranged in the vehicle's underframe are to be painted completely. The following coats of paint have been provided (colours may change).

- Anticorrosive primer beige-red RAL 3012, epoxy metal primer with hardener approved by DBI, layer thickness 60 µm.
- Intermediate coat: sand yellow RAL 1002, PUR priming paint with normal hardener, layer thickness 60 µm.
- Top coat quartz grey RAL 7039, PUR varnish paint with normal hardener, layer thickness 60 µm.

4.1.2.2 Before painting, the inspection addresses with the company labels are to be covered. Bolts, slide surfaces, threaded spindles; valves, etc. are not to be painted. If necessary, the inner walls of the WSP Unit components are to be molatened with corrosion protection oil.

4.1.3 Energy Supply for Electrical/Electronic Components of the WSP Equipment

4.1.3.1 For the energy supply of electrical and electronic components of the WSP Unit a 110 V direct current voltage is available in the vehicles.

4.1.4 Mechanical Strength Requirements


4.1.4.1 All components of the WSP Unit are to be designed according to the mechanical strength requirements stipulated in UIC 566. If required corresponding proofs are to be submitted.

4.1.5 Service Life

4.1.5.1 The coaches manufactured by Indian Railways are designated for a service life of 35 years. The WSP Unit is to be developed and designed accordingly. The supplier should specify the recommended maintenance schedules/practices clearly to achieve the desired life.

4.1.6 Reliability

4.1.6.1 The reliability of the WSP Unit or the parts and components included in the supplier's scope of delivery is to guarantee a mileage of 200,000 km without any failures. The conditions for proving a trouble free mileage are to be coordinated with LHB. The design of all parts has to guarantee that under normal

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 34 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

operating conditions a mileage of 1,000,000 km will be reached without any replacements. The supplier should specify the recommended maintenance schedules/practices clearly to achieve the desired life.

4.1.7 Design Suitable for Easy Maintenance

The design of the WSP Unit is to allow an easy maintenance.

4.1.8 Environmental and Ambient Conditions caused by the WSP Unit

4.1.8.1 Environmental Acceptability

When selecting the materials, the general aspects of environmental acceptability, the degradability of the materials used without residues, if possible, or the later recycling are to be taken into consideration.

4.1.8.2 Electromagnetic Compatibility

The legal rules concerning the protection requirements for the EMC of electrical parts and components within the scope of supply of the WSP Unit supplier are to be considered and corresponding proofs are to be submitted.

5. DESIGN DOCUMENTS

5.1 The following documentations for the development and design of the WSP Unit are to be prepared by the supplier:

- A set of drawings consisting of drawings and parts lists, including block diagrams, pneumatic flow charts and wiring schemes, list of operating subassemblies etc. (for documentation of electrical and pneumatic components).
- A description of the WSP Unit incl. the description of diagnostics
- An operation and maintenance manual
- A list of spare parts.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

APPENDIX- G

Specification for Brake Indicators for AMDBS & EPA feature for LHB type coaches

1. SCOPE

This specification covers the technical requirements related to performance, inspection and testing of Brake Indicators for Axle Mounted Disc Brake system for LHB type coaches and does not include other necessary provisions of the contract.

2. EQUIPMENT DESIGN

2.1 The design of the brake indicators shall be of UIC Pattern.

3. PURCHASE INSPECTION

3.1 The purchase inspection shall be carried out at the premises of the manufactures who are cleared for the regular manufacture of Brake Indicators and registered with RDSO. The following procedure shall be followed: -

3.1.1 The Inspecting Authority shall make audit checks of the manufacturing procedure 'Internal Quality Assurance System' to ensure to that the Brake Indicators offered for inspection is manufactured strictly as per 'Internal Quality Assurance System' and the manufacturer has carried out all the tests inspection during manufacturing stage to ensure that the Brake Indicators as well as their components are manufactured strictly to the specification / drawing and quality standard of the collaborator.

3.1.2 After having satisfied about the quality standards, 10% of each lot of 100 Brake Indicators shall be tested as per procedure given in clause 4.

4. TESTS

4.1 Leakage Test

4.1.1 Apply a pressure of 10kg/cm² (± 0.2 kg/cm²). There should not be any leakage if checked with soap water.

4.2 Functional Test

4.2.1 Apply a pressure of 0.5 to 0.6 Kg/cm². Red colours should appears in Window of indicator.

4.2.2 Now release the pressure to 0 kg/cm². Green colours should appears in Window of indicator.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

APPENDIX-H

Specification for EP assist equipments for AMDBS & EPA feature for LHB type coaches

1. EP Assist Brake System should conform to UIC 541-5 so as to meet the latest provision of relevant UIC specification for "Passenger Train" application. The proposed EP Assist System when used along with this basic system shall enable performance of the whole system in conformity of relevant UIC specification.
2. Design of EP Assist System shall permit the fitment of disc brakes and WSP system in the brake system, without affecting the functionality of the existing brake system.
3. Design of EP Assist System shall be such that in the event of EP 'OFF' or its failure, the braking system of the train should not remain totally inoperative and the brake system shall work as ordinary twin pipe graduated release type of air-brake system without deteriorating its limitations & performance.
4. With the proposed EP assist it shall be possible to attach few more coaches without EP assist feature brake system at the rear end of the train formation having coaches fitted with EP assist brake system and such attachment shall be possible without significant change in braking distance of the train and generation of excessive inter coupler forces at any location during compressed air brake application in entire rake.
5. The EP Assist Brake System equipment includes:
- 5.1 Scope of supply for EP assist feature on Axle mounted Disc brake system for LHB Coaches shall cover the following equipments. It is the prerogative of purchaser to procure the system as complete set or in part:

S.N.	Description	Qty. per coach	Remarks
1.	EP Assist Brake Equipments		
	Set of Magnet valves for distributor valve	1 Set	To be as per UIC-541-5
	@Brake Test Boxes	2	
	Junction Boxes	3	
	UIC couplers	4 sockets & 2 plugs	
	Cables for connecting:		
	• Middle junction to brake test boxes	2	To be as per UIC-541-5
	• Middle junction to EP assist magnet valves	1	
	• End junction box to dummy socket	2	
	• End junction box to UIC socket	2	
	• End junction box to UIC plug	2	
	• Middle junction box to end junction box	2	
2.	Mounting bracket	1 Set	

(@):- Brake Test boxes should be provided with indicator which shall be required for checking the connectivity of EP assist brake system.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 37 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

- 5.2 Electro-pneumatic module with application and release magnet valves. The equipment to be fitted on coaches shall perform satisfactorily in the voltage range of 50V to 137V DC. Supplier will include protection against sudden variation in voltage like surge in EP assisted brake system devices design itself.
- 5.3 Minimum 9 core cable according to UIC-541-5 should be used between the junction boxes and inter coach connections.
- 5.4 Cable for connection of electro pneumatic magnet valves on DV and middle junction box to brake test box with indicator.
- 5.5 Brake test box to be provided on both sides of each coach as per UIC guidelines for testing of EP assist feature in the rake.
6. The inspection of above EP brake equipment's should be carried out as per respective internal test schemes of the firm which have to be submitted by them for RDSO approval.
7. Firm should offer UIC standard couplers (with pilot contact/micro-switch type) from the UIC approved sources mentioned in Appendix-L of UIC 541-5.
8. A wiring scheme for the EP assist system between locomotive & coaches and at the coach level is given as a reference in Annexure-III.




Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

APPENDIX-I

Laptop Specification for Downloading and Analysing of WSP data LHB Brake System:

The minimum required parameters for the laptop are given below: -

S.N.	Description	Required Parameter
1.	Processor Make	Intel
2.	Processor Description	Intel Core i5
3.	Processor Generation	11
4.	Type of RAM	DDR4
5.	RAM Size (GB)	8 GB
6.	Type of drives used	HDD
7.	HDD Capacity	500 GB
8.	Operating System	Window 10 Home
9.	Wireless Connectivity	Yes
10.	Display Size (Inch)	14 Inch
11.	On Site OEM Warranty	3 Years

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

ANNEXURE-I

1. OVERALL DIMENSIONS OF COACH

1.1	Gauge	1676 mm
1.2	Length over coach body	23540 mm
1.3	Length over buffer	24000 mm
1.4	Width over body	3250 mm
1.5	Buffer centres	1956 mm
1.6	Maximum distance between wheel	12340 mm
1.7	a. Maximum operating speed [AC(EOG) & Generator Car]	160 kmph
	b. Maximum operating speed [AC (SG)& Non-AC]	120 kmph
1.8	a. Maximum test speed [AC(EOG) & Generator Car]	180 kmph
	b. Maximum test speed [AC (SG)& Non-AC]	140 kmph
1.9	Wheel diameter	New 915 mm Worn 845 mm
1.10	Wheel base	2560 mm
1.11	Minimum clearance above rail level	91 mm under loaded and worn condition
1.12	Maximum bogie rotation & swing	3.5°, 82 mm

2. RAKE COMPOSITION:

2.1	For speed 160 kmph (EOG type)	
2.1.1	Generator car cum luggage & brake van (Power Car)	2
2.1.2	AC first class	2
2.1.3	AC chair car	14
2.2	For Speed 120 kmph (SG type)	
2.2.1	AC-three tier (SG)	3
2.2.2	AC -2 tier (SG)	2
2.2.3	AC Ist (SG)	1
2.2.4	SLR	2
2.2.5	SCN	10
2.2.6	GS	4

3. TENTATIVE TARE AND GROSS WEIGHT OF COACHES (Tonnes)

3.1 For Speed 160 kmph (EOG type)

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 40 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

	COACH TYPE	TARE	GROSS
3.1.1	Generator car cum luggage & brake van	53.2	56.6
3.1.2	AC first class (EOG)	41.0	48.3
3.1.3	AC chair car(EOG)	40.9	48.9
3.1.4	AC Ist Sleeper	43.0	47.8
3.1.5	AC-3T (EOG)	46.5	54.5
3.1.6	AC-2T (EOG)	43.0	50.4
3.1.7	AC Hot Buffet Car	40.9	48.9

3.2 For Speed 120 kmph (SG type)

	COACH TYPE	TARE	GROSS
3.2.1	AC Three tier (SG)	50.50	58.50
3.2.2	AC Two tier(SG)	48.00	55.04
3.2.3	AC-Ist (SG)	45.90	50.70
3.2.4	SLR	35.40	44.50
3.2.5	SCN	36.28	42.91
3.2.6	GS	35.29	50.49

4. LOCO PARTICULARS

4.1	Length of Loco	19974 mm
4.2	Gross mass	113 t
4.3	Horse power	3600

(Multiple consists of two locos may be used for 18 coach train haulage).

5. ENVIRONMENTAL CONDITIONS

5.1	Maximum temperature under sun	70 deg. C
5.2	Maximum temperature under shade	45 deg. C
5.3	Minimum temperature	-10 deg. C
5.4	Altitude	Sea level to 1776 meter
5.5	Humidity	100% saturation during rainy Season
5.6	Rain falls	Fairly heavy
5.7	Atmosphere during hot weather	Extremely dusty and desert terrain in certain areas

Environment: Coaches shall be working in coastal area with salt laden and corrosive atmosphere.

6. TRACK PARAMETERS

6.1	Maximum gradient	1:37
6.2	Sharpest curvature	145.83 m radius
6.3	Max. super elevation	185 mm

7. INTERFACES OF THE BRAKE SYSTEM

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

CG-F-4.2.1-4 (Rev.1)	Page 41 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

7.1 Mechanical interfaces

- 7.1.1 The supplier specifies the interfaces of all brake components with the car-body or with the bogie thus allowing the design of the corresponding mounting parts.
- 7.1.2 The supplier of the brake system specifies the single connecting points of the parts and components at the car-body or at the bogie as well as their position. Moreover, the supplier has to specify corresponding requirements or restrictions.
- 7.1.3 The supplier specifies the single weights (which can be summarized appropriately) of all components of the brake system to be mounted to the vehicles in order to guarantee the mechanical strength of the connecting points.
- 7.1.4 The supplier guarantees all internal interfaces of the brake system (car-body equipment/bogie equipment/wheel slide protection equipment).
- 7.1.5 If the components included in the scope of delivery of the brake supplier are to be connected with the brake pipes of the car-body and/or the bogie, they are to be suitable for ferrule connections. Ferrule connections type B are used (Ferrule are made of stainless steel, screwed connections are made of galvanized steel, the car-body pipes are made of stainless steel).

7.2 Electrical interfaces

- 7.2.1 In order to guarantee an easy exchangeability, the single electrical/electronic parts of the brake control system are to be connected by means of plug in connectors, if possible. The plug in connections and the mating connectors for connecting the electrical/electronic components are to be delivered by the supplier of the brake system.
- 7.2.2 The supplier of the brake system defines the connection of the brake control system to the vehicle's energy supply system. The power consumption and the requirements on the energies to be supplies are to be specified (e.g. voltage tolerances, ripple etc.).

7.3 Pneumatic interfaces

- 7.3.1 The hose coupling heads of the pneumatic system have to correspond to those of the existing vehicles.
- 7.3.2 The supplier defines the requirements of the pneumatic brake system on the components generating the compressed air under the aspect of a steady readiness for braking or the corresponding safety.

7.4 Interfaces with the wheel slide protection unit

- 7.4.1 The interfaces with the wheel slide protection are technically to be coordinated according to the integration of the wheel-slide protection into the brake system of the brake supplier. As far as known, these interfaces are situated at the pressure switches 1.3/1.8 Kg/cm² in FP line (functional and electric interface) and at the valves of the wheel slide protection (functional and pneumatic interface).

7.5 List of Applicable Drawings

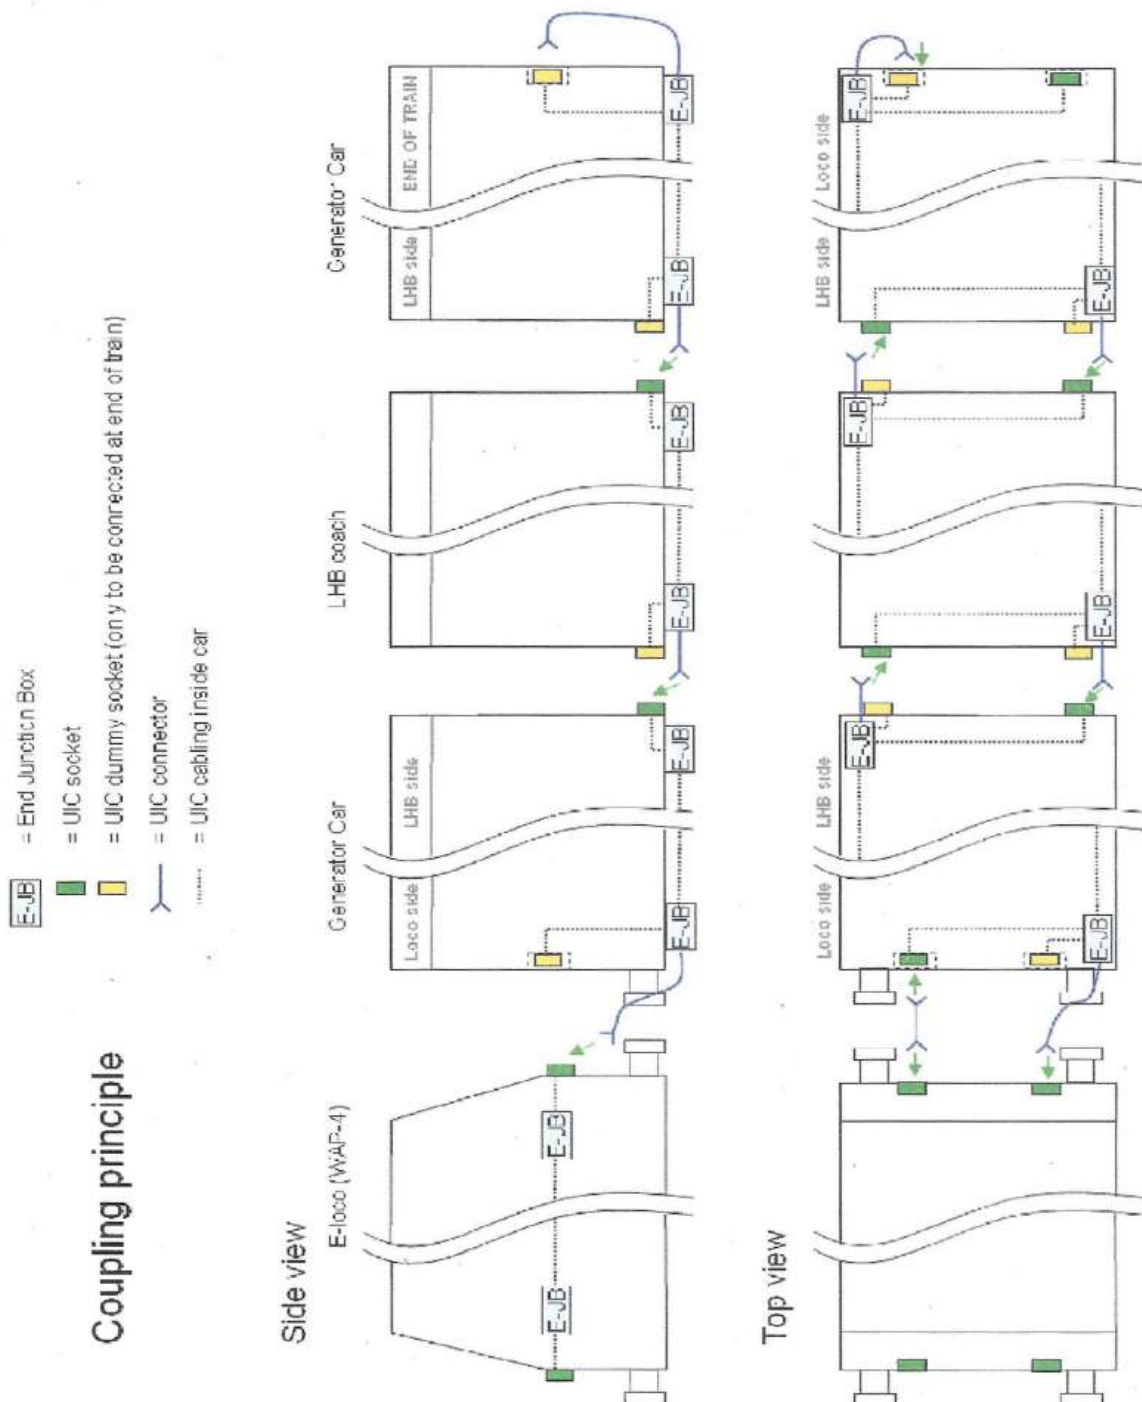
S.No.	Drawing No.	Description
1.	LW02100 (RCF)	Axles for FIAT Bogies
2.	LW03002 (RCF)	Bogie Frame Assembly with air spring
3.	DD11235 (RCF)	Underframe complete for Double Decker

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

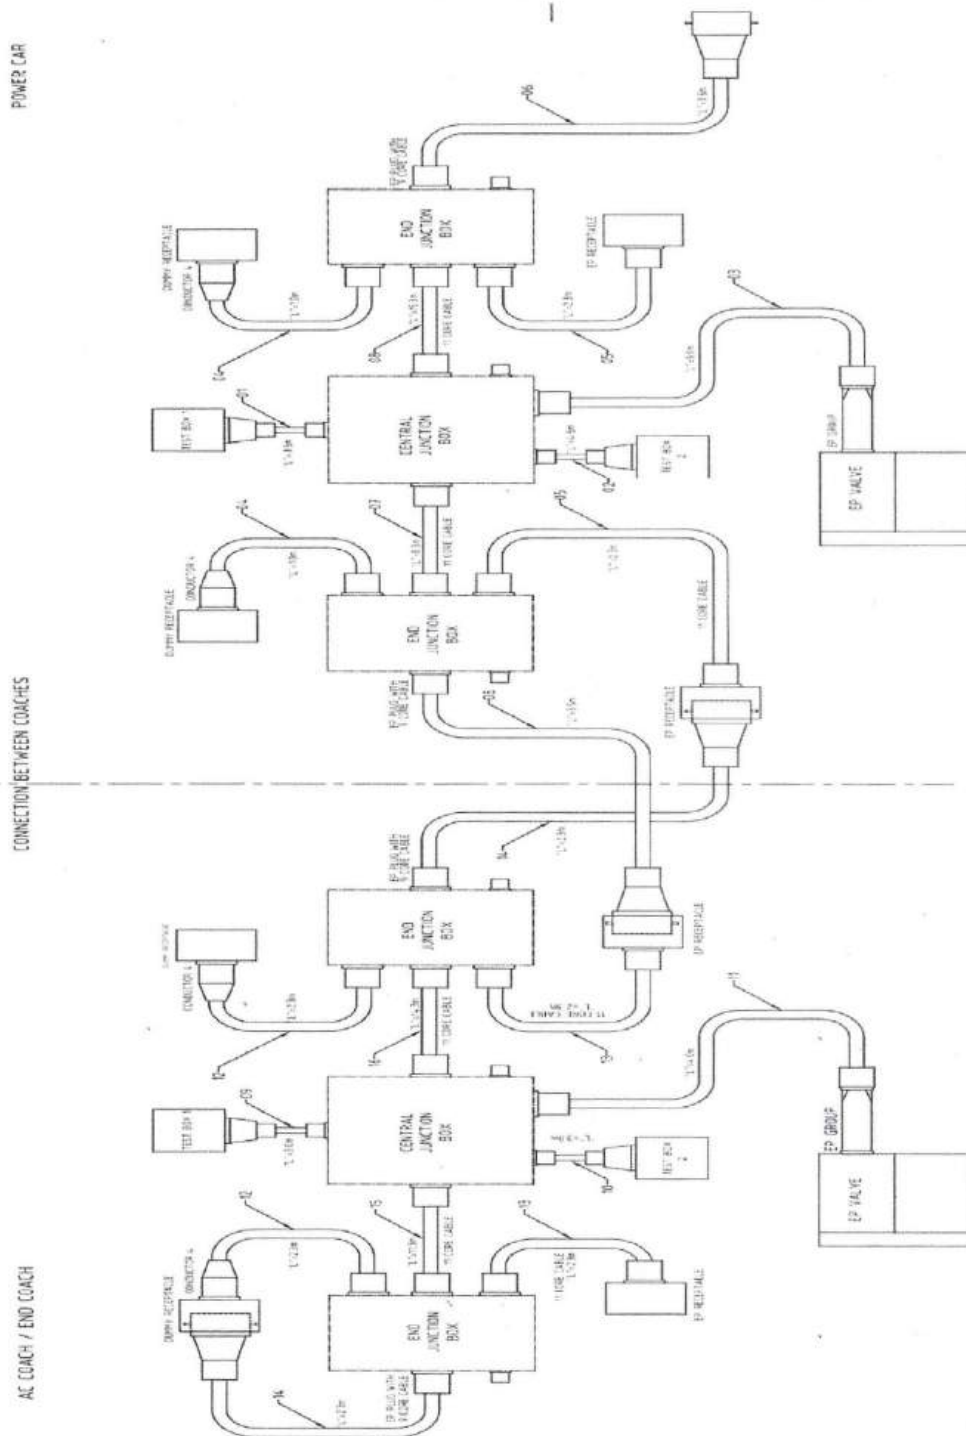
CG-F-4.2.1-4 (Rev.1)	Page 42 of 46	Latest (Rev./Amd.) issue: March'2025	Spec. No. RDSO/2011/CG-04 (Rev.04)
----------------------	---------------	--------------------------------------	------------------------------------

4.	DD10250 (RCF)	Body Shell assembly for Double Decker Coach
5.	MI000524 (RCF)	Axle Mounted Brake Cylinder
6.	MI001696 (RCF)	DV port hole location on brake control panel
7.	LD36001	Layout of air brake on underframe for Double Decker
8.	1 10113.0.09.100.002 (Alstom)	Compressed air brake mounting NPP end
9.	1 10113.0.09.100.003 (Alstom)	Compressed air brake mounting PP middle
10.	1 10113.0.09.100.004 (Alstom)	Compressed air brake mounting NPP middle
11.	1 10113.0.09.100.005 (Alstom)	Compressed air brake mounting PP end
12.	1272112 (FIAT-SIG)	Brake equipments
13.	1902094 (FIAT-SIG)	Securing Disc
14.	1902713 (FIAT-SIG)	Axle end cover
15.	1902714 (FIAT-SIG)	Axle end cover
16.	V12014 (PARIZZI)	Frequency Generator (Toothed wheel)

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

Annexure-IIEP ASSIST WIRING SCHEME BETWEEN LOCOMOTIVE & COACHES

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

Annexure-III**EP ASSIST WIRING SCHEME AT COACH LEVEL (INDICATIVE)**

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

Annexure-IV**SCHEDULE OF TECHNICAL REQUIREMENTS****INFRASTRUCTURE & TESTING FACILITIES REQUIRED FOR MANUFACTURE OF AXLE MOUNTED DISC BRAKE & EP ASSIST BRAKE SYSTEM FOR LHB TYPE BG MAINLINE COACHES.****1.0 SCOPE**

- 1.1 This section covers the infrastructural requirements for manufacture of Axle Mounted Disc Brake & EP Assist Brake System for LHB type BG mainline coaches.

2.0 REQUIREMENTS

- 2.1 All vendors seeking registration with approving authority must fulfil the requirements of this schedule.
- 2.2 The firm should have adequate plant, machinery and manufacturing capacity for manufacture and supply of Axle Mounted Disc Brake & EP Assist Brake System for LHB type BG mainline coaches within the delivery schedule.

3.0 PLANT, MACHINERY AND INFRASTRUCTURE REQUIREMENTS

- 3.1 The Manufacturer shall have adequate space and covered area with cemented floor to accommodate the following and for smooth logistics:
- a) Damp-free place for storage of raw materials.
 - b) Adequate manufacturing area.
 - c) Finishing, Assembly and Inspection area.
 - d) Storing and dispatch of finished products.

4.0 TESTING FACILITIES

The manufacturer shall have the test benches/equipment of following items to test the products as per the requirements of the specification, installed in a workstation.

4.1 Test benches/equipment of following items are required:

S.N.	Description	Specification
1.	Brake Container Module	Appendix-A
2.	Brake Cylinder	Appendix-B
3.	Brake Caliper unit (including torque testing arrangement)	Appendix-C
4.	Passenger Emergency Alarm Valve (PEAV)	Appendix-D
5.	Passenger Emergency Alarm Pilot Valve with micro switch & indication Device	Appendix-D
6.	Emergency brake accelerator valve	Appendix-E
7.	Wheel Slide Protection Unit (WSP)	Appendix-F
8.	Pressure Switch	Appendix-F

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage

9.	Dump Valve	Appendix-F
10.	Speed Sensors	Appendix-F
11.	Brake Indicator	Appendix-G
12.	EP Assist Unit	Appendix-H
13.	Guard Emergency brake valves	-
14.	Roller operated Cam valve	-
15.	Isolating cocks	-
16.	Distributor Valve	As per CK-209

4.1.1 In addition to above machines, the standards room/Inspection should also have a minimum of two nos. of the following instruments:

- Surface Plate/Table for measurement Components.
- Vernier Caliper with digital indicator.
- Sufficient no. of gauges for measuring critical dimensions as defined in the QAP. One should be preserved as a master gauge set, one should be used in Standard room and two should be for regular use on shop floor.
- Digital Surface finish tester.
- Digital Vernier type height gauges.
- Measurement steel tape.
- Feeler gauge sets.

5.0 QUALITY CONTROL REQUIREMENTS

- The firm must ensure that proper analysis is being done on regular basis to study the rejections at various internal stages and this analysis is well documented.
- Records for traceability of product/parts thereof from raw material up to finished stage should be available.
- There should exist a quality manual of the firm indicating the extent of control for production and testing.
- Documented system for calibration of testing & measuring equipment and records thereof.

Signature			
Name & Designation	Prepared by: Man Singh Meena JE/Carriage	Checked by: Mahesh SSE/Carriage	Approved by: Sudhir Singh Director/Carriage