


FRONT VIEW

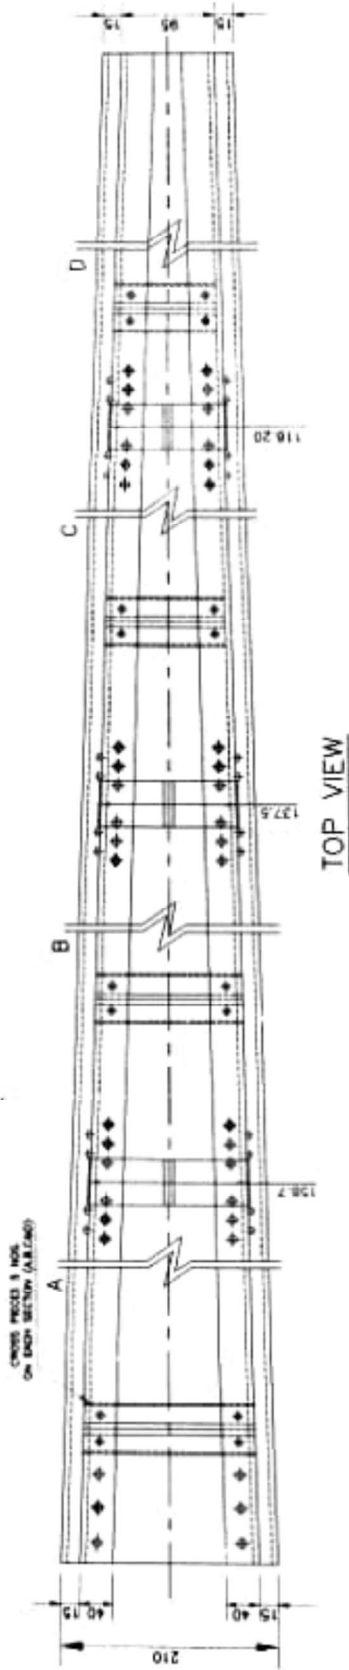

TOP VIEW

8. CROSS PIECES SHALL BE RIVETTED WITH 5.0mm BLIND RIVETS.

7. 'A' & 'B' SEGMENT - 20 SWG, 'C' & 'D' SEGMENT - 22 SWG THICK SHEET

Signature Not Verified

Signature Not Verified

ALL DIMENSIONS SHALL BE WITHIN ± 1 mm UNLESS OTHERWISE SPECIFIED.

ALL DIMENSIONS SHALL BE WITHIN ± 0.5 mm.

ALL DIMENSIONS SHALL BE WITHIN ± 1 mm UNLESS OTHERWISE SPECIFIED.

Reason: IRPS-CRIS

Date: 14/08/2026

Location: New Delhi

Generated from eOffice by Ghanshyam Kumar, OS/PCMM/HQ/ER/Ghanshyam, OS/PCMM/HQ/ER, EASTERN RAILWAY HQ/ER

BOOM FOR ELECTRIC LIFTING BARRIER

DRN BY: <i>30/10/17</i> SSE/D/Signal	MATERIAL FOR BOOM AUSTENITIC STAINLESS STEEL GRADE EN 1.4372	RDSO/S 11601(ADV.) SHEET 1 OF 4
CHD & APPD BY: <i>30/10/17</i> M	DRAWING No.	