


FRONT VIEW

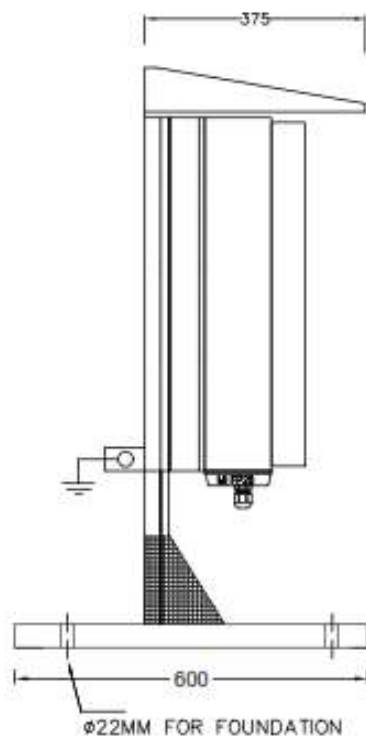

SIDE VIEW

NOTE:

ENCLOSURE: THERMOPLASTIC POLYCARBONATE
 DIMENSION: 500X985X620 MM
 BUSBAR RATING: 300A
 SERVICE: OUTDOOR
 MOUNTING: FLOOR MOUNTING
 CABLE ENTRY: BOTTOM
 DEGREE OF PROTECTION: IP65 (EN 60 529)
 GASKETS: POLYURETHANE
 WEIGHT: 25 Kgs(APX)

GIVEN CABLE SIZE:-

4CX120 SQ.MM CU.CABLE - 1No(I/C)
 4CX120 SQ.MM CU.CABLE - 1No(O/G)