

कार्यालय नगरपालिका परिषद खरसिया, जिला - रायगढ़ (छ.ग.)

तकनीकी स्वीकृति हेतु चेक लिस्ट


क्र.	कार्य का नाम	विवरण	अनुलग्नक/संलग्नक	रिमार्क
2	कार्य का स्थल/वार्ड क्र		वार्ड क्र. 18 रायगढ़ रोड मंडी गेट से आडिटोरियम, स्पोर्ट्स कॉम्प्लेक्स तक बी.टी. रोड निर्माण कार्य।	—
3	कार्य की विद्यमान स्थिति		18	—
4	विस्तृत तकनीकी प्रतिवेदन (कार्य की आवश्यकता)		अप्रारंभ	—
5	1. प्राक्कलन राशि		संलग्न है।	—
6	2. योजना के प्राक्कलन का विवरण		24.22 लाख	—
7	1. मद का नाम		संलग्न है।	—
8	2. लेखा शीर्ष तथा बजट प्रावधान की उपलब्धता		अधोसंरचना मद/अन्य उपलब्ध मद	—
9	1. कार्य के लिए सक्षम प्राधिकारी द्वारा दी गई सैद्धांतिक सहमति		—	—
10	2. परिषद/सामान्य सभा से अनुमोदन		शासन	—
11	1. साईट प्लान सहित आवश्यक मानचित्र		संलग्न है।	—
12	2. संरचना की ड्राईंग व डिजाईन		संलग्न है।	—
13	1. भूमि का प्रकार		—	—
14	2. भूमि स्वामित्व व हस्तांतरण		शासकीय भूमि	—
15	प्राक्कलन में प्रयुक्त SOR के ITEMS के संदर्भ का उल्लेख है/नहीं		नक्शा खसरा संलग्न है।	—
16	यदि कोई NON SOR आयटम लिया गया हो तो विवरण दे।		है	—
17	विकास योजना में प्रस्तावित भू-उपयोग		नहीं	—
18	नगर तथा ग्राम निवेश से ले-आउट अनुमोदन		है	—
19	कार्यस्थल अविवादित एवं निकाय की भूमि का स्वामित्व प्रमाण पत्र		है	—
20	प्रस्तावित कार्य स्थल पर पहुंच मार्ग है/नहीं		है	—
21	प्रस्तावित कार्य स्थल पर अतिक्रमण/एच.टी. लाईन/ एल. टी. लाईन/ टेलीफोन पोल/झाड़ के प्रभाव से मुक्त है या नहीं		है	—
22	कार्य स्थल नाला/निचली भू-सतह/वाटर लाग क्षेत्र से प्रभावित होने संबंधी प्रतिवेदन		—	—
23	भवन निर्माण किये जाने की स्थिति में पानी निकासी व्यवस्था।		—	—
24	भवन निर्माण की स्थिति में निःशक्तजनों के लिए शासन के निर्देशानुसार उपयुक्त सुविधाये का प्रावधान		—	—
25	उक्त कार्य पूर्व में कब बना/रिनोवेशन हुआ या नहीं		उक्त कार्य पूर्व में नहीं हुआ है।	—
26	पूर्णता अथवा उपयोगिता प्रमाण पत्र		नहीं	—
27	अन्य आवश्यक जानकारी		—	—

मुख्य नगरपालिका अधिकारी
नगरपालिका परिषद खरसिया


उपअधीक्षता
नगरपालिका परिषद खरसिया

REPORTS AND SPECIFICATION

- | | | |
|---|--------------------------|--|
| 1 | Name of Work | DETAILED ESTIMATE FOR BT ROAD FROM
RAIGARH ROAD MANDI GATE TO AUTODORIUM
SPORT COMPLEX TAK AT WARD NO.18.... |
| 2 | Estimated Amount | 24.22LAKHS |
| 3 | Authority | |
| 4 | Neccesity | Since it is required to be done. |
| 5 | Rates and Specifications | The rate provided in this Estimate are as per
road S.O.R. of E. in CG P.W.D Raipur inforce
from 01-01.2025 |

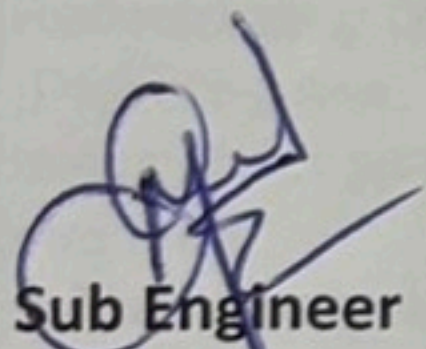

Sub Engineer
NAGAR PALIKA
PARISHAD
KHARSIA

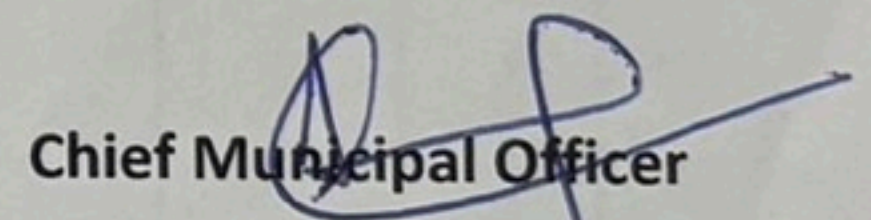

Chief Municipal Officer
NAGAR PALIKA PARISHAD
KHARSIA

OFFICE OF NAGAR PALIKA PARISHAD KHARSIA, DIST. RAIGARH
ESTIMATE FOR BT ROAD FROM RAIGARH ROAD MANDI GATE TO AUTODORIUM SPORT COMPLEX
TAK AT WARD NO.18....

SOR P/I No.		Particulars	No.	L.	B.	D.	Total Quantity	Rate	Unit	Amount
1	5.2	Tack coat Providing and applying tack coat with bitumen emulsion (RS-1, grade confirming to IS:8887) using distributor on the prepared bituminous/granular surface cleaned with mechanical broom and as per clause 503.								
		iii) Cement concrete Pavement @ 0.35 kg/Sqm	1	589	6.0		3534.00			
							3534.00	20.00	cum	70680.00
2	5.7	Bituminous Concrete (Providing and laying bituminous concrete with minimum 40-60 TPH capacity hot mix plant using crushed aggregates of specified grading, premixed with bituminous binder @ 5.0 to 6.0% by weight of total mix of mix and filler, transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction afor Grading II (13.2 mm nominal size) with bitumen 6.0 %								
			1	589	6	0.05	176.70	9881.00	CUM	1745972.70
3	5.18	Seal Coat (Providing and laying seal coat for sealing the voids in a bituminous surface laid to the specified levels, grade and cross fall including rolling and finishing using Type A and B seal coats as per clause 511)	1	589	6		3534.00	46.00	SQM	162564.00
4	8.22	Road Marking with Hot Applied Thermoplastic Compound with Reflectorizing Glass Beads on Bituminous Surface (Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorizing glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35-1997. The finished surface to be level, uniform and free from streaks and holes.)								
			2	589	0.1		117.80			
							117.80	627.00	SQM	73860.60
										2053077.30
										369553.00
										2422630.30

T.S. No. 156/07 Date 20/11/16

Technical Sanction of Nagar Nigam/Palika Panchayat 20/11/16 heare by 20/11/16

SUB ENGINEER NAGAR PALIKA PARISHAD KHARSIA 20/11/16 NAGAR PALIKA PARISHAD KHARSIA

Construction of BT Road Raigarh Road mandi Gate - auditorium Sports complex

in ward No. 18 for Rs. 24.23 lacs
(In words) Rs. Twenty four lacs
twenty three thousand

Checked By. [Signature] Executive Engineer
U.A.&D. Bilaspur (C.G.)

संलग्न पत्र क्र. 2604 दि. 20/11/16
के शर्तों के अधीन जारी

24.23 lacs