



भारत सरकार-रेल मंत्रालय  
अनुसंधान अभिकल्प औरमानक संगठन  
लखनऊ- 226011

E-mail: [dse4group@gmail.com](mailto:dse4group@gmail.com)  
Telephone : 2465754 & 42226(Rly)

Government of India - Ministry of Railways  
Research, Designs & Standards  
Organization, LUCKNOW – 226011



No. EL/6.11.1

Dated: As signed

Principal Chief Electrical Engineer,

1. Central Railway, Mumbai, CST-400 001.
2. East Central Railway, Hazipur-844101.
3. East Coast Railway, Chandrashekharapur, Bhubaneswar-751016.
4. Eastern Railway, Fairlie Place, Calcutta-700001.
5. North Central Railway, Block-A, Subedarganj, Allahabad- 211033.
6. Northern Railway, Baroda House, New Delhi-110001.
7. North Western Railway, Jaipur-302006
8. North Eastern Railway, Gorakhpur-273001
9. North East Frontier Railway, Maligaon, Guwahati-781011
10. South Central Railway, Secunderabad-500 071.
11. South East Central Railway, Bilaspur-495004.
12. South Eastern Railway, Garden Reach, Calcutta-700 043.
13. Southern Railway, Park Town, Chennai-600 003.
14. South Western Railway, Hubli- 580020
15. West Central Railway, Jabalpur-482001.
16. Western Railway, Churchgate, Mumbai-400 020
17. Chittaranjan Locomotive Works, Chittaranjan-713 331
18. Banaras Locomotive Works, Varansi-221004
19. Patiala Locomotive Works, Patiala-147003

**Sub:** RDSO Spec No RDSO/2017/EL/SPEC/0134 Rev. 4 of twin beam LED headlight for Electric Locomotives and EMUs.

1. RDSO has revised Spec No RDSO/2017/EL/SPEC/0134 Rev 4 of twin beam LED headlight for Electric Locomotives and EMUs. Copy of the same is being attached herewith.
2. Copy of the Spec can also be downloaded from RDSO's website through following path.

[www.rdsolndianrailways.gov.in](http://www.rdsolndianrailways.gov.in)---->[Specifications/drawings](#)-----> [Loco, EMU & Power Supply](#)---->List of specification and others.....>Master list of specification.....>at Sn-5 (Headlight) or click on link "[WELCOME TO RDSO](#)"

This is for kind information and necessary action please.

Encl: As above

*(Signature)*  
(Nirdosh Kumar Gupta)  
for DSE/Mech/Elect

Signature Not  
Verified

Digitally signed by  
UDAY BHAN YADAV  
Date: 2026.07.07  
12:02:35 +05'30'  
Reason: IREPS-CRIS  
Location: New Delhi

**Copy to:**

- M/s Ensav Devices Pvt. Ltd., Plot no.-3, Seth Atmaram Shah Road near range office behind platinum hospital Vasai East District Palghar, Vasai — 401 208(Maharashtra)
- M/s Matsushi Power Technology, Khasra No. 3881, Lal Tappar Industrial Area, Majri Grant, Dehradun, Uttarakhand-248 140
- M/s Power Technologies Corporation, Khasra No. 3983, Lal Tappar Industrial Area, Majri Grant, Dehradun, Uttarakhand-248 140
- M/s Alan Electronic Systems Private Limited- Mumbai-421506
- M/s Signotron (India) Pvt. Ltd., Plot-J1/6, Block-EP, Sector-V, Salt Lake Electronic Complex, Kolkata-700 091
- M/s RT Vision Technologies Pvt. Ltd.-Gautam Buddha Nagar
- M/s Patra and Chanda Manufacturing And Engg. Pvt. Ltd.-Howrah
- M/s Altos Electronics-Pune
- M/s Beacon Industries-Dehradun
- M/s Lord Krishna Electronic Industries-Delhi
- M/s Rayon Illuminations and Energy Solutions Private Limited-Aurangabad
- M/s Digital Communication and Control Pvt. Ltd- Kolkata
- M/s Urban Engineering Association Pvt. Ltd.-Kolkata
- M/s Orion Technocraft Private Limited-Bengaluru
- M/s S. Internationals, B-14, Creative Industrial Estate 72, N.M. Joshi Marg Chinchpokli West Mumbai - 400 011, Maharashtra
- M/s FIEM INDUSTRIES LIMITED, D-5 Mansarovar Garden West Delhi, Delhi - 110015, India
- M/s PI ENGINEERING WORKS, Khasra No. 92, Shikeda Road Industrial Area Modinagar Ghaziabad 201204 UP
- M/s MBCOM POWERTECH PRIVATE LIMITED-HOWRAH, Nischinda, P.O.-Ghoshpara, Howrah, West Bengal, PIN CODE -711227, India
- Applied Electro Magnetics (P) Ltd., 504, 5th Floor, Savitri Cinema Complex, Greater Kailash-II, New Delhi- 110048 (India)
- INSTAPOWERT LTD-NEW DELHI, S-19 PANCH SHILA PARK NEW DELHI, Delhi - 110017, India
- M/s TOPGRIP INSTRUMENTS COMPANY-KOLKATA  
40, Strand Road, 2nd Floor, Room No.62 Kolkata, West Bengal - 700001, India
- KAYSONS ELECTRICALS PVT. LTD.- SH 15/79 A Shivpur varanasi, Uttar Pradesh - 221003, India
- SHAKTI INDUSTRIES, Plot No. 94 I, Sector 6A IIE SIDCUL Haridwar, Uttarakhand - 249403, India
- SHRI SUBHASH PARASRAM ELECTRONIC PARK PRIVATE LIMITED, A - 75 SECTOR - 63 NOIDA GAUTAM BUDDHA NAGAR, Uttar Pradesh - 201301, India
- TROLEX INDIA PVT LTD- 88-B, ELECTRONIC CITY, HOSUR ROAD, BANGALORE, Karnataka - 560100, India
- NEUROMOTION SYSTEMS PRIVATE LIMITED- H-20, LGF South Extension - 1 South East Delhi, Delhi - 110049, India
- SUNITA BIOTECH- D94 AND 95, EPIP SITE V, KASNA, GREATER NOIDA GAUTAMBUDH NAGAR, Uttar Pradesh - 201306, India
- ECOSTAR SOLUTIONS-16, Maharaja Tagore Road Dhakuria Kolkata, West Bengal - 700031, India

It is advised to download the copy of the Spec through above path and furnish your compliance to this office within three months



**GOVERNMENT OF INDIA  
MINISTRY OF RAILWAYS**

**SPECIFICATION OF  
TWIN BEAM LED HEADLIGHT FOR ELECTRIC  
LOCOMOTIVES & EMUs**

**SPECIFICATION No RDSO/2017/EL/SPEC/0134, Rev. '04'**

**Issued on: 09.10.2025**

Approved By	Signature
PED/Traction	

**ELECTRICAL DIRECTORATE  
RESEARCH DESIGN & STANDARDS ORGANISATION  
MANAK NAGAR, LUCKNOW – 226 011**

Prepared by	Checked by	Issued by

**Status of Revision**

SN	Date of Revision	Page No.	Revision	Reasons for Revision
1.	November-2017	All	0	First Issue
2.	April-2019	4,5,6,7,8, 9 & 10	1	<ol style="list-style-type: none"> <li>1. Maximum and minimum lux requirement in dim mode of head light included to avoiding glare.</li> <li>2. Maxima lux level in bright mode is also specified.</li> <li>3. In some of place language is change to have more clarity.</li> <li>4. Testing requirement to protection against water and dust change as per latest slandered.</li> <li>5. Recovery time after endurance test has been added.</li> <li>6. Clause 7.4 added to control the quality of the LED.</li> <li>7. Sample test quantity for acceptance test has been specified in clause no. 11.1.</li> <li>8. Word cut off voltage has been replaced by operating voltage range.</li> </ol>
3.	12.02.2021	6 & 9	2	<ol style="list-style-type: none"> <li>1. New Para no. 5.12 added for including outline drawings no. SKEL-5042.</li> <li>2. Details in regard to voltage and time specified for reverse polarity test in Para no. 12.5.</li> </ol>
4.	10.06.2024	3, 5, 6, 7, 9 & 10	3	<ol style="list-style-type: none"> <li>1. Clause no. 2.1.1 modified minimum temperature -15°C instead of 0°C.</li> <li>2. Clause no. 5.5 modified for specified power supply in head light terminal.</li> <li>3. In clause no. 6.1, 12.5 &amp; 12.6.3 modified for Lux reduce in dim mode for avoid glare.</li> <li>4. New para No. 7.5 added for measurement of LED junction temperature.</li> <li>5. In clause no. 12.6.5 modified to Measurement of angle beam in type test.</li> </ol>

Prepared by	Checked by	Issued by
<i>3rd</i>	<i>[Signature]</i>	<i>[Signature]</i>

5.	09.10.2025	All	4	<ol style="list-style-type: none"> <li>1. Clause No. 5.2 added for minimum voltage as 77 V.</li> <li>2. Clause no. 5.7 modified to ensure accessibility of beam adjustment facility in situ position and added RAL7032 grade of gray colour shade.</li> <li>3. Clause No. 5.10 added for RDSO approved E-BEAM copper cable</li> <li>4. Clause no. 8.2 edited for EMI/EMC test certificate added as per IEC 61000 (latest).</li> <li>5. Clause No. 11.2 edited for Water Ingress Protection Test and Dust Test (IP-66) on one unit of each lot in routine test.</li> <li>6. Clause No. 12.8 added for Water Ingress Protection Test – IPX6 Test (as per IEC 60529).</li> <li>7. Clause no. 16.0 added for warranty clause.</li> <li>8. Training and maintenance manual added in clause no. 17.0</li> <li>9. Marking of terminals added in clause no. 19.0.</li> <li>10. Packing instruction added in clause no. 20.</li> </ol>
----	------------	-----	---	---

Prepared by	Checked by	Issued by
<i>3415</i>	<i>[Signature]</i>	<i>[Signature]</i>

## GENERAL

### 1.0 Introduction:

This specification covers construction features, technical requirements and testing procedure for Twin Beam LED Headlight for Electric Locomotives & EMUs.

- 1.1 Headlight is provided in front and rear of Electric Locomotives & EMUs to illuminate track, track-side indication, OHE masts any obstruction/abnormality on track etc. in electrified sections at night time to facilitate Loco pilot to take necessary action for ensuring safe and efficient operation of the train, noting down mast numbers and also to warn other persons on ground of incoming train for their safety.

### 2.0 Environmental Conditions:

- 2.1 The equipment should function satisfactorily under the following environmental conditions which are encountered where equipment will be expected to work.

#### 2.1.1

- a) Maximum temperature

Stabled Locomotive under sun : 70 deg. C  
On board working loco under sun. : 55 deg. C

- b) Minimum temperature : -15 deg. C

- c) Average temperature : 47 deg. C

- 2.2 **Humidity:** Up to 100% during rainy season.

- 2.3 **Altitude:** Up to 1776 m above mean sea level.

- 2.4 **Rainfall:** Very heavy in certain areas. The equipment shall be designed suitably.

### 2.5 Environment:

The equipment shall be designed for extremely dusty and desert terrain in certain areas. The dust concentration in air may reach a high value of 1.6 mg/cm<sup>3</sup>. In many iron ore and coalmine areas, the dust concentration is very high affecting the filter and air ventilation system.

Prepared by	Checked by	Issued by
<i>3477</i>	<i>Prashant</i>	<i>Prashant</i>



## 2.6 Coastal Area:

The equipment shall be designed to work in coastal area in humidity and salt laden and corrosive atmosphere. The maximum values of the condition will be as follows:

- a) Maximum pH value : 8.5
- b) Sulphate : 7 mg per litre.
- c) Max. concentration of chlorine : 6 mg per litre.
- d) Maximum conductivity : 130 micro siemens /cm

## 3.0 Vibration and Shocks:

The equipment shall conform to IEC-60571 & IEC-61373 (latest)

## 4.0 Terminology:

For the purpose of this specification, following definitions shall apply:

**Beam:** - A distribution of radiation characterized by a concentration of luminous flux within a small solid angle substantially greater than the concentration in directions outside the solid angle.

**Beam Axis:** - It is the line through the effective light centre of the headlight in the principal direction of the beam. The principal direction may be found by taking the centre of the solid angle subtended at the effective light centre of the headlight and bounded by the intensity vectors equal to 90% of maximum intensity.

**Beam spread:** - The angular extent of a beam, in a specified plane passing through the beam axis, which contains all the radius vectors of the polar curve of luminous intensity having lengths greater than 1/10 of the maximum.

Prepared by	Checked by	Issued by
341	341	341

**TECHNICAL DETAILS****5.0 General:**

5.1 The LED head light unit shall consist of two separate independent high intensity LED lamps assembly with their separate driver unit, provided in suitable water proof and dust proof (IP-66) enclosure having toughened front glass.

5.2 Operating voltage range (DC) is:

Maximum-138 V,

Nominal-110 V and

Minimum-77 V

5.3 The LED's shall be connected such that failure of one LED should not affect other LEDs.

5.4 The power consumption of LED head light assembly should be not more than 100 watt at nominal voltage.




5.5 The input terminal of the twin headlight shall be suitable to receive 3 wires Bright (+Ve), Dim (+Ve) & Common (-Ve) to each beam along with one earth wire suitably terminated at earth terminal provided on the fitting. The clearance of the live parts of the connector shall not be less than 10 mm from the housing of the headlight. The creepage distance between live parts and non-current carrying metal parts shall be not less than 15 mm over the surface of insulation.

LED Headlight illumination output with combination of Power input to Bright, Dim & Common:

- i. Bright + Common = Bright Light
- ii. Dim + Common = Dim Light
- iii. Bright & Dim + Common = Bright Light

5.6 The headlight assembly shall be operated through the selector switch provided on driver's-desk in following modes: -

- (i) Front Bright
- (ii) Front Dim
- (iii) Rear Bright
- (iv) Rear Dim




Prepared by	Checked by	Issued by
		



- 5.7 This type of headlight shall be suitable for mounting on the front of drivers cab. The twin beam shall be mounted on 3 mm thick common mounting plate with beam adjustment facility. Location of beam adjustment facility in headlight shall be such that same may be access easily in situ position for focus adjustment as and when required. The mounting plate shall be suitably pre-treated and powder coated with grey colour shade RAL 7032 from inside and outside.
- 5.8 The weather proof-sealing gasket provided between the front mounting plate and the casing to make the headlight water tight to prevent entry of rain water shall be made of Neoprene or superior quality rubber.
- 5.9 Glass used for the front cover shall be of the heat resistant toughened (TS type), conforming to IS: 2553 Part-I (latest), minimum 4.5 mm thick-transparent of AA quality to IS: 2835 (latest) and pass IK-05 impact test. Manufacturer should provide certificate for IK-05 impact test from any NABL/Govt. approved lab.
- 5.10 A terminal block of DMC Glass Fibre Epoxy moulded fire retardant to withstand 200 °C (Manufacturer should provide certificate for same from any NABL/Govt. approved lab) for the connections of incoming supply through RDSO approved E-Beam copper cables of suitable size shall be mounted in the headlight housing, close to the cable entry point. The terminal block shall be free from blowholes and cracks. The nut, bolt and stud washer shall be of stainless steel. It shall be readily accessible and shall be positioned to avoid the possibility of accidental contact during maintenance. Terminal block shall be stud type suitable to receive ring type cable sockets.
- 5.11 Hinges, catches and locking screws shall be made of material having good corrosion resistance. Otherwise, this shall be provided with adequate protection against corrosion. They shall be robust and simple in construction and shall not need use of special tools for opening. Design and fabrication of covers or other enclosures shall be such that they do not open out due to vibration or during maintenance.
- 5.12 LED head light shall be so designed that, it can be retrofit in place of existing head light of Electric Locomotives & EMUs without need of any change. Most suited outline dimension of LED head light frame for electric locomotive and EMUs are given in drawing no. **SKEL-5042** (Attached) for guidance.

**6.0 Photometric Requirements:** The photometric requirements shall be as follows:

- 6.1 The intensity of the complete head light system measured in a clear atmosphere, free from dust, smoke and fog at a point in the centre of lamp unit at ground level, when directed accurately, at distance of 8 meters shall be not less than 7000 lux and not more than 9000 lux in bright mode while in dim mode it should be not be less than 900 lux and not more than 1200 lux. Also at a distance of 305 meter it should not be less than 4.8 Lux in bright mode.

Prepared by	Checked by	Issued by
		

6.2 The photometric test shall be carried out on minimum two numbers of the lot offered during acceptance tests. The test voltage at lamp terminals shall be maintained as per clause 5.2. The lux output shall remain  $\pm 5\%$ .

6.3 The beam spread should be symmetrical and angle of beam shall not be less than 7 degrees.

#### 7.0 Technical Requirements of LED:

7.1 LED used should be of SMD (Surface Mounted Diode) / COB (Chip on board) type only.

7.2 Color temperature of White color LED shall be 3700K-5000K (White).

7.3 Color Rendering Index (CRI) – Greater than or equal to 80.

7.4 Generally, LED of Nichia / Osram / Samsung / Lumileds / Cree / Avago make only shall be used. The LEDs Used shall be LM-80 & UL certified with 50000 hours or more. Same shall be submitted by manufacturer. If any manufacturer proposed to use LEDs of make other than specified above, the details of make and relevant certificates shall be submitted to RDSO for approval before its use.

7.5 The junction temperature of the LED and through current in the LED should not exceed the specified values given in the LED data sheet which will be verified during prototype testing.

#### 8.0 Technical Requirements of Electronic components Used:

The circuit board and electronic components to be used in the LED head light should be of rating / type so as to provide reliable functioning.

8.1 MC PCB (Metal Core PCB) shall be used for mounting of LED's.




8.2 The electronics should be suitable for rolling stock application in heavily EMI polluted environment. Certificates from NABL/Govt. Lab for EMI/EMC as per IEC 61000 (latest) tests of complete Head Light unit shall be submitted at the time of prototype.

#### 9.0 Technical Requirements of Driver:

9.1 Surge protection feature should be provided to ensure that surges do not cause failure of any electronic components of LED head light.

9.2 Heat bearing capacity of driver for LED head light should be provided.

9.3 Minimum efficiency of driver shall be 85%.

Prepared by	Checked by	Issued by
		

## 10.0 Categories of Test:

**10.1 Type Test:** Type test shall be carried out on equipment of the approved design. If there is any change in design or source of supply of any components/sub-components/assembly, units made to the changed design or from new source shall be treated as new item for the purpose of conducting type tests.

**10.2** Type tests are to be repeated in case of any major change is made. In case of minor changes, i.e. change in type, rating of component etc., special test/tests as agreed by user and manufacturer are to be conducted to ensure their suitability and effectiveness of the modifications.

**11.0 Routine Test:** Routine test shall be carried out regular supply orders.

**11.1 Acceptance Test:** Acceptance test shall be carried on 10% of batch quantity subject to minimum of 5 nos. as per table given below.

**11.2** The tests to be carried out on complete unit are given in the following table.

SN	TESTS	SPEC. CLAUSE NO.	TYPE TESTS	ROUTINE TESTS	ACCEPTANCE TESTS
1.	Visual Inspection	12.1	✓	✓	✓
2.	Insulation Resistance Test	12.2	✓	✓	✓
3.	Dielectric High Voltage Test	12.3	✓	✓	✓
4.	Surge Test	12.4	✓		
5.	Reverse Polarity Test	12.5	✓	✓	✓
6.	Photometric Test	12.6	✓	✓	✓
7.	Water Ingress Protection Test and Dust Test (IP-66)	12.7	Certificate from NABL /Govt. Lab	Certificate from NABL /Govt. Lab for one unit of each lot	
8.	Water Ingress Protection Test (IPX6 Test)	12.8	✓	✓	✓
9.	Thermal Shock Proof	12.9	✓	✓	
10.	Dye-penetration Test	12.10	✓		
11.	Endurance Test	12.11	✓		
12.	Vibration and Shock Test	12.12	Certificate from NABL /Govt. Lab		

Prepared by	Checked by	Issued by
<i>34/12</i>	<i>Uthayak</i>	<i>Uthayak</i>

## 12.0 Tests:

### 12.1 Visual Inspection:

Materials and finish of all components shall be visually examined for finish and verified for their dimensions and material specification. The manufacturer shall furnish a metallurgical composition certificate for the body material.

### 12.2 Insulation Resistance Test:

The insulation resistance with 500 V megger shall be more than 50 M ohms at 70 % RH for all the circuits. The period of the test should not less than 60 sec.

The following minimum requirements is to be ensured as per given below:

- i. Control circuit to earth : 20 MΩ
- ii. Screen to earth : 10 MΩ
- iii. LED-unit input circuit to earth : 10 MΩ

### 12.3 Dielectric High Voltage Test:

Immediately after insulation resistance test, an ac voltage of 1500 V RMS of sine wave form of 50 Hz shall be applied for one minute between the live parts and frame. The test shall be started at voltage of less than 1/3 of the test voltage and shall be increased gradually to the full test voltage. The high voltage testing equipment shall be set at 20 mA leakage current. Head light shall withstand the voltage without flash over, break down or tripping of supply.

### 12.4 Surge Test:

The test shall be conducted as per IEC-60571 (latest). The surge pulse shall be 1.8 Kv, 1.2/50 micro second.

### 12.5 Reverse Polarity Test:

The LED unit should have built-in reverse polarity protection. The reverse polarity test shall be conducted at a Nominal Voltage (110 V DC) for 1 minute. After the test lux level should remain within limit as given below:

- i. Bright mode (at a distance of 8 meter) = 7000 Lux (Min.) and 9000 Lux (Max.)
- ii. Dim mode (at a distance of 8 meter) = 900 Lux (Min.) and 1200 Lux (Max.)

Prepared by	Checked by	Issued by
<i>34rr</i>	<i>[Signature]</i>	<i>[Signature]</i>



**12.6 Photometric Test:**

**12.6.1 Test Voltage:** LED head light should be tested at maximum, nominal & minimum voltage level as per clause no. 5.2.

**12.6.2 Illumination Intensity:**

The main headlight under test shall be mounted on a test stand which shall be put on one end at the centre line (lengthwise) of the level ground, free from obstruction over an area of 300m x 30 m. The height of the axis shall be 3.7 m. above the ground level. Photometric readings shall be taken on each point shown in Annexure-A at

- (i) Ground level,
- (ii) Height of 0.75 meter above rail level,
- (iii) Height of 1.5 meters above rail level.

With above readings, curves of intensity of illumination shall be plotted to obtain the spread over the track.

**12.6.3** During routine/acceptance tests, illumination intensity measurements will be done on headlights, at a distance of 8 meters and it shall not be less than 7000 lux and not more than 9000 lux in bright mode while in dim mode it shall not be less than 900 lux and not more than 1200 lux.

**12.6.4** During type test illumination intensity measurement will be done at 305 meter and it shall not be less than 4.8 Lux in bright mode.

**12.6.5 Angle of the Beam:**

During type test headlight shall be mounted on a table with beam centre one metre above the ground. Photometric measurement shall be taken in the lateral direction at right angles to the axis of the beam in horizontal plane at one metre height at a distance of 100 metres from the headlight. Move photometer in lateral direction on the left and right so as to read the maximum illumination intensity and locate the point after which the illumination level reaches  $1/10^{\text{th}}$  of maximum values.

The distance between both the left and right points should be measured as 'x' metre: -

$$\text{Then } \tan A = x/2 \times 1/100$$

The angle  $2A$  is the angle of the beam

**12.6.6** Photometric test shall be done after 15 minute of illumination of LED head light assembly.

Prepared by	Checked by	Issued by
39N	Amr	Amr

#### 12.7 Water Ingress Protection test and Dust test:

LED head light unit should have IP-66 protection against water and dust. Manufacturer shall provide certificate for same from any NABL/Govt. approved lab as per IEC 60529.

#### 12.8 Water Ingress Protection Test – IPX6 Test (as per IEC 60529):

Switch ON the LED Headlight for 15 minutes & bring it to a stable operating temperature at rated voltage. Switch OFF the supply & immediately subject the fitting with a water jet for 3 minutes from all directions with a hose pipe having a nozzle. The nozzle shall be held at distance between 3 meters from the test sample. Set water pressure at nozzle such as to deliver water flow rate of 100 Ltr/min  $\pm 5\%$  (Approximately 100 kN/m<sup>2</sup>).

After the test, no water shall enter the enclosure.

#### 12.9 Thermal Shock Proof Test for Cover Glass:

Keep the cover glass into  $90 \pm 2$  °C hot water for 10 minutes and then keep it  $0 \pm 1$  °C cold water for 3 minutes. This test shall be repeated four times and the glass shall show no evidence of distress.

#### 12.10 Dye-Penetration Test:

Dye penetration test for detection of surface defects/cracks on welds shall be conducted as per IS: 3658 (latest).

#### 12.11 Endurance test:

- 12.11.1 The complete assembly of headlight operated at 1.1 times the rated voltage and kept in a heat chamber at a temperature of 70°C for a period of 5 days (120 hrs) under the normal condition of use. At the completion of this test no deterioration, such as cracks, scorching, discolouring and deformation shall be observed on any other part of the headlight.
- 12.11.2 Immediately after the endurance duty as per 12.11.1 the headlight is subjected to high voltage test specified in clause 12.3 but with the test voltage reduced to 1000 V. Headlight shall withstand the voltage for one minute to pass the test.
- 12.11.3 After endurance test as per clause 12.11.1, also head light shall pass photometric test as per clause 12.6.3 after the recovery time of 1 hour.

Prepared by	Checked by	Issued by
<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>



#### 12.12 Shock and Vibration Test:

Vibration test shall be carried out as per IEC-61373 (latest) on complete head light assembly in energized condition. The test results shall be treated as satisfactory if there is no failure/damage noticed. Manufacturer should provide certificate for this test from any NABL/Govt. approved lab.

Routine test specified in clause no. 11.2 except of Water Ingress Protection Test and Dust Test (IP-66) shall be conducted after shock and vibration test.

#### 13.0 Field Trials:

After successful completion of type tests, the equipment's shall be subjected to field service trials for a minimum period of six months. The number of trial equipment's and venue shall be as agreed between the purchaser and the supplier. The installation and commissioning of the equipment's for field trials shall be carried out by the supplier.

#### 14.0 Documentation:

Following documents shall be supplied:

- BOM (Bill of Material), Data sheets for components/devices and other equipment proposed for use.
- Outline General Arrangement showing mounting arrangement of complete unit with major components & its details. Beam adjustment facility and Connector for power supply to driver unit shall be shown.
- Schematic circuit diagram along with protection scheme, connection of LEDs showing no. of arrays and no. of LED in each array.
- Part no. and manufacturer's data sheet of LEDs used.
- Clause by clause compliance.
- Test protocol with procedure of testing.

#### 15.0 Infringement of Patent Rights:

Indian Railway shall not be responsible for infringement of patent rights arising due to similarity in design, manufacturing process, components used in design, development and manufacturing equipment and any other factor, which may cause such dispute. The responsibility to settle any issue lies with the supplier.

#### 16.0 Warranty:

The manufacturer/supplier shall have warranty for LED headlight and its satisfactory performance for the period of four (4) years from putting in service and five (5) years from date of supply whichever is earlier.

Prepared by	Checked by	Issued by
3401	4401	4401

**17.0 Training & Maintenance manual:** The supplier shall arrange for training to IR personnel in maintenance and troubleshooting of the system supplied. One day training for three persons per location is to be arranged by the supplier in the field of maintenance and troubleshooting. Training will be arranged free of cost. Suitable training material will be supplied to the participants.

17.1 The supplier shall supply the write up and the elaborate manual for maintenance and trouble shooting free of cost to IR for easy maintenance. Two set of manuals will be supplied each shed/shop or one set per 10 nos. of equipment supplied.

**18.0 Marking:**

An anodized aluminum plate carrying following markings shall be fitted on the casing headlight assembly (outside as well as inner side) at a suitable place:-

- (i) Manufacturer's name and trade mark
- (ii) Serial number of the unit
- (iii) Month and Year of manufacturing
- (iv) RDSO's specification Number
- (v) Operating Voltage and Current

**19.0 Marking of Terminals:**

The correct operation of the system depends upon the specific connection of the terminals. As such terminals shall be marked appropriately.

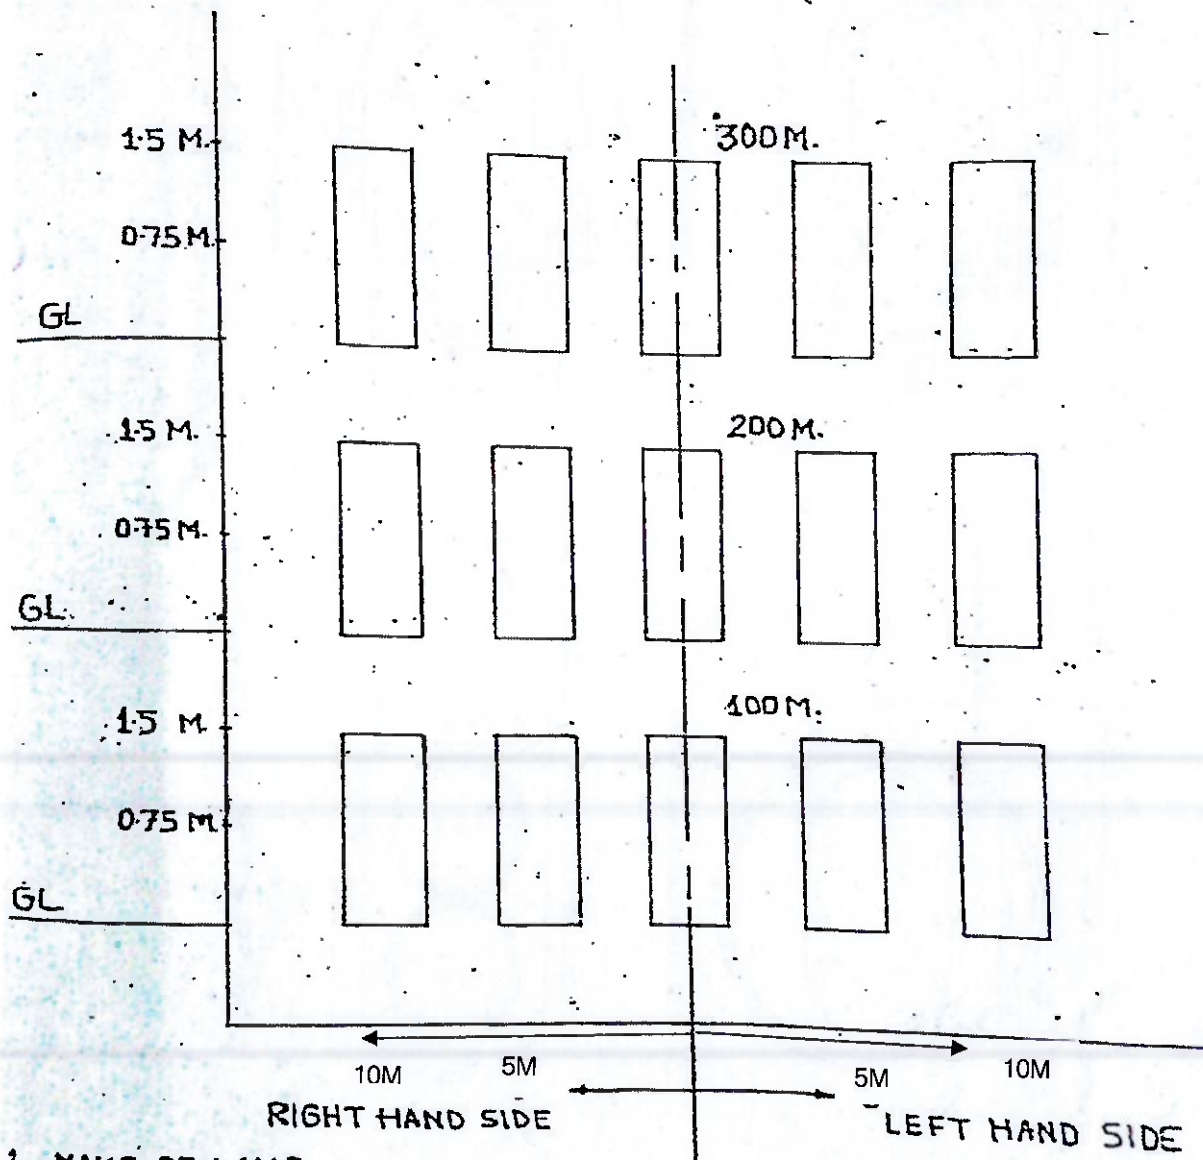
**20.0 Packing:**

20.1 All headlight shall be individually wrapped in bubble sheet and packed in individual card board boxes. The empty spaces shall be filled with suitable filling material. Alternatively, these may be packed in EPE/PU foam boxes. The units shall be finally packed in a wooden case or card boxes of sufficient strength so that it can withstand bumps and jerks encountered in a road/ rail journey.

20.2 Every box shall be marked with PL numbers, contents and name of manufacturer. The upside shall be indicated with an arrow. Boxes should have standard signages to indicate the correct position and precaution "Handle with Care" with necessary instructions.

20.3 The units and their sub-assemblies shall be so packed as to permit convenient handling and to protect against loss or damage during transit and storage.

Prepared by	Checked by	Issued by
<i>39m</i>	<i>Atsush</i>	<i>Uish</i>

**ANNEXURE -A**

1. MAKE OF LAMP.
2. VOLTAGE MAINTAINED DURING THE TEST
3. CURRENT.
4. INTENSITY OF ILLUMINATION
5. ANGLE OF THE BEAM

Prepared by	Checked by	Issued by
342		

