

—


1. ALL DIMENSIONS SHOULD BE CALLED.
2. FOUNDATION BOLTS SHOULD BE PLASTERED WITH THE FOUNDATION SURFACE.
3. OUTER SURFACE SHOULD BE RAMMED UP TO THE SAND UP TO 300 FROM THE TOP OF THE SURFACE.
4. ON ALL SIDES EARTH SHOULD BE CEMENT SAND AND LEVEL SHOWN IN THE SKETCH.
5. FOUNDATION WITH MIXTURE OF 200G:3:6) STONE CHIPS.

This Dog should used for all future
Tenders (also also introduced in
Standard Schedule - 80% code of
ASIE/Can/ccc

800-967-1111

1000

COMBESDES DRG No. - S & T - C-33 (115)

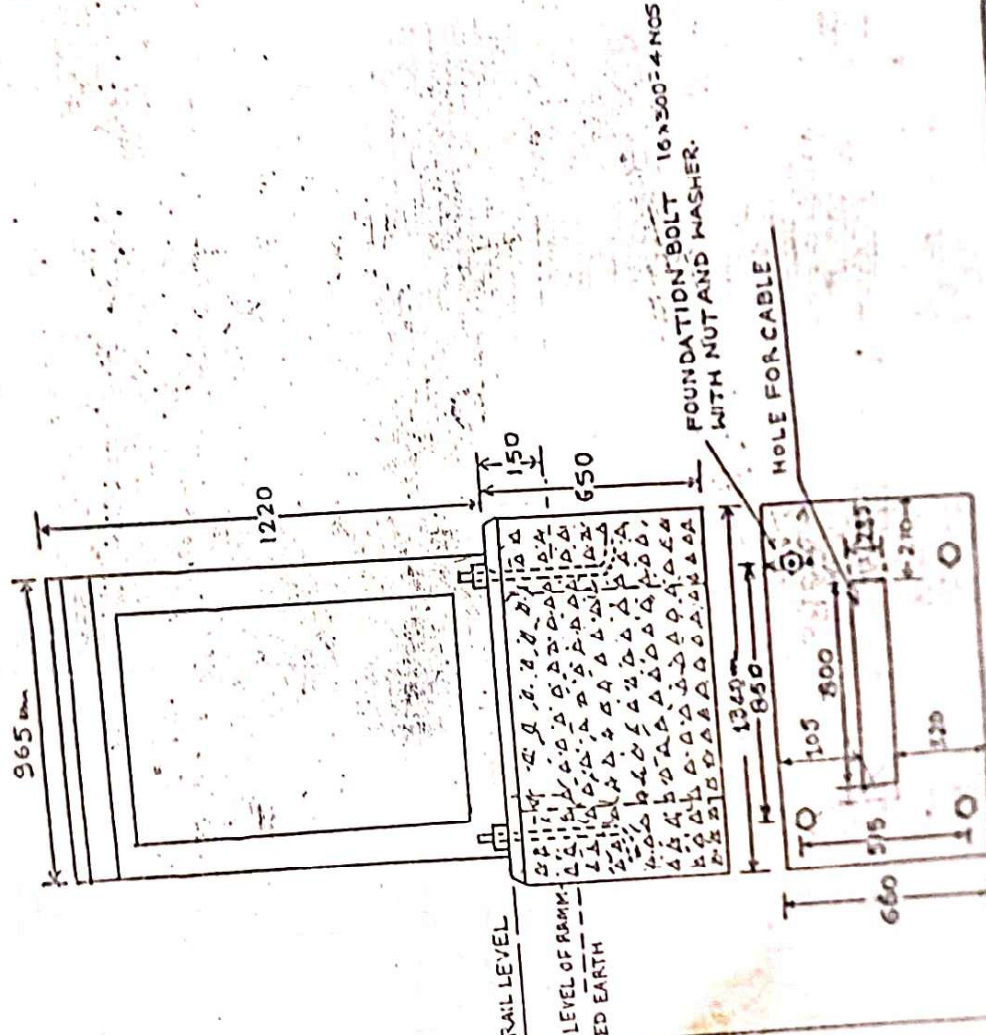

THIS TAG SHOULD BE USED ONLY IN TENDER

| | | | |
|----------------------------|----------------------------|----------------------------|--|
| APPROVED | CHECKED | DRAWN | S-K-NO. 1 S-K-T- C-6/98 (H-F-G) |
| [Signature] [Signature] | [Signature] [Signature] | [Signature] [Signature] | |