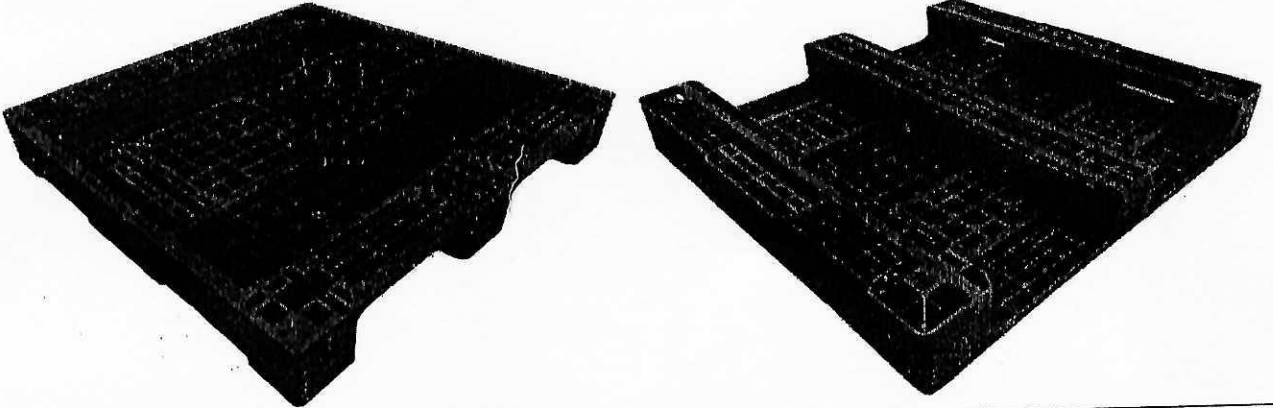


# TECHNICAL SPECIFICATION

DIMENSION (TOLERANCE - +/- 10 MM)	LENGTH - 1200 MM WIDTH - 1200 MM HEIGHT - 150 MM
MANUFACTURING PROCESS	ONE SHOT INJECTION MOLDED
MATERIAL OF CONSTRUCTION	100% VIRGIN GRADE HDPE
TYPE	NON-REVERSIBLE, 3 LONGITUDINAL RUNNERS
SURFACE	PERFORATED TOP & BOTTOM
ENTRY	4 WAY ENTRY
LOAD BEARING (UNIFORMLY DISTRIBUTED LOAD)	STATIC - 4000 KG., DYNAMIC - 1000 KG., RACKING - 1000 KG.,
MHE COMPATIBILITY - SUITABLE TO HANDLE WITH ALL KIND OF MATERIAL HANDLING EQUIPMENTS (MANUAL PALLET TRUCK / FORKLIFT / REACH TRUCK AND STACKERS) *FOR DYNAMIC/RACKING OPERATIONS OF LIFTING PALLET BY ANY MHE THE FORKS OF ALL MHE SHOULD BE NEAR TO THE EXTREME OUTER RUNNERS/SKIDS OF ALL PLASTIC PALLET, AS SMALLER WIDTH OVER THE FORK WILL CAUSE PALLET BENDING.	
PALLET IMAGE	
	
HSN CODE	39231090