

SPECIAL CONDITION

The unite rate of controlled cement concrete item for R.C.C work of Mix-150, M-200, M-250, M-300 and M-350 included in tender are taken considering cement consumption as shown below Table-A.

Table-A

Sr.No.	Grade of controlled cement concret	Cement consumption as per SOR in Kg/Cu.m.	Remark
1	M – 150	290	
2	M – 200	360	
3	M – 250	380	
4	M – 300	410	
5	M – 350	425	

The contractor has to submit the mix design for different grade of cement concrete at his own cost before execution as directed and to be approved from the Executive in charge. Reduction in rates of R.C.C items put into the tenders by the contractor shall be given according to the cement consumption of the approved mix design of cement concrete for that item if the cement consumption of mix design is less than as prescribed in Table-A. The recovery shall be carried out as per the input rate of cement mentioned in tender documents. The condition is also applicable to the (i) excess quantity for R.C.C item and (ii)Extra item rate list. This condition is to be followed as per documents.

Signature of contractor

Executive Engineer

Project Implementation Unit

મકાનો તથા પુલોના આર.સી.સી. કામોમાં
લોખંડના સળીયાના માપો લખવા તથા
ચૂકવણામાં લેપ લેન્ય ની લંબાઈ
ગણતરીમાં નહીં લવા બાબત

ગુજરાત સરકાર
માર્ગ અને મકાન વિભાગ
સચિવાલય, ગાંધીનગર

પરિપત્ર ક્રમાંક:- PDW-10-2017-01-C
તા.૧૫-૦૨-૨૦૧૭

પરિપત્ર:-

મકાન, રસ્તા અને પુલોના કામોમાં આર.સી.સી. આઇટમોમાં સમાવિષ્ટ સ્ટીલ રેઇનફોર્સમેન્ટના માપો લખવા અને ચૂકવણા દરમિયાન લેપની લંબાઈ ગણતરીમાં લેવામાં આવે છે. રેઇનફોર્સમેન્ટમાં લેપની વધુ સંખ્યાને પ્રોત્સાહન ન આપતા સળંગ રેઇનફોર્સમેન્ટ (સળીયા) જ મહદઅંશે વપરાય એ તાંત્રિક રીતે વધુ યોગ્ય છે.

MORT&H સ્પેશીફિકેશનના પ્રવર્તમાન ધારાધોરણ મુજબ રેઇનફોર્સ (સળીયા)ના ચૂકવણામાં લેપની લંબાઈના માપો ગણતરીમાં લેવામાં આવતા નથી. (Section 1608)

MORT&H સ્પેશીફિકેશનના પ્રવર્તમાન ધારાધોરણ મુજબ માર્ગ અને મકાન વિભાગ હેઠળ મકાન, રસ્તા અને પુલના રેઇનફોર્સ (સળીયા)ના સ્પેશીફિકેશનમાં Mode of Measurement & Payment માં હવે પછી નીચે મુજબના ફેરફાર કરવા આથી સુચના આપવામાં આવે છે.

<u>EXISTING ITEM</u>	<u>PROPOSED AMENDMENT</u> (As per MORT&H Speciafication Item No.1608)
મકાનના સ્પેશીફિકેશન	મકાનના સ્પેશીફિકેશન
5.4.10 Providing an Mild Steel reinforcement for R.C.C. work including bending binding and placing in position etc. complete up to floor two level.	5.4.10 Providing an Mild Steel reinforcement for R.C.C. work including bending binding and placing in position etc. complete up to floor two level.
5.4.11 High yield deform bars steel reinforcement for R.C.C. work including bending, binding and placing in position complete up to floor two level.	5.4.11 High yield deform bars steel reinforcement for R.C.C. work including bending, binding and placing in position complete up to floor two level.
3.2 Reinforcement shall be measured in length including overlaps, separately for different diameters as actually used in the work. Where welding or coupling is resorted to in place lap joints, such	3.2 Reinforcement shall be measured in length including hooks, if any, separately for differencnt diameters as actually used in work, excluding overlaps. From the length so

Circulate

All
SE

joints shall be measured for payment as equivalent length of overlap as per design requirement. From the length so measured, the weight of reinforcement shall be calculated in tones on the same basis of as per M-18 even though steel is supplied to the contractor by the department on actual weight. Length shall include hooks at the ends Wastage and annealed steel wire for binding shall not be measured and the cost of these items shall be deemed to be included in the rate for reinforcement.

measured, the weight of reinforcement shall be calculated in tonnes on the basis of IS: 1732. Wastage, overlaps, couplings, welded joints, spacer bars, chairs, stays, hangers and annealed steel wire or other methods for binding and placing shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.

EXISTING ITEM

रस्तांना स्पेशीलीकेशन

Item No. 39 : Providing steel reinforcement.

- Providing and placing in position mild steel bar reinforcement including cutting, bending, hooking and tying complete as per details.
- High yield strength deformed bars reinforcement.

(10) Reinforcement shall be measured in length separately for different diameters as actually used in the work, from the length so measured the weight of reinforcement shall be calculated in tones on the same basis of IS : 1732 even though steel is supplied to the contractor by the Department on actual wieghment. Length shall ilcude hooks at ends. Wastage and annealed steel wire for binding shall not be measured and cost of thes items shall be deemed to be

PROPOSED AMENDMENT (As per MORT&H Speciafication Item No.1608)

रस्तांना स्पेशीलीकेशन


Item No. 39 : Providing steel reinforcement.

- Providing and placing in position mild steel bar reinforcement including cutting, bending, hooking and tying complete as per details.
- High yield strength deformed bars reinforcement.


(10) Reinforcement shall be measured in length including hooks, if any, separately for differencnt diameters as actually used in work, excluding overlaps. From the length so measured, the weight * of reinforcement shall be calculated in tonnes on the basis of IS: 1732. Wastage, overlaps, couplings, welded joints, spacer bars, chairs, stays, hangers and annealed steel wire or

included in the rates for reinforcement.	<i>other methods for binding and placing shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.</i>
<p><u>પુલના સ્પેશીફિકેશન</u></p> <p>Item: 21 -Providing</p> <p>(A) Mild Steel Reinforcement</p> <p>(B) High Yield Strength Deformed bars. reinforcements.</p> <p>(10) Reinforcement shall be measured in length including overlaps, separately for different diameter. as actually used in the work, where welding or coupling is restored to, in place of lap-joints, such joints shall be measured for payment as the equivalent length of over lap as per design requirement. From the length so measured the weight of reinforcement shall be calculated in tones on the same basis of IS 1732 even though steel is supplied to the contractor by the Department on actual weighment. Length shall include hooks at ends. Wastage and annealed steel wire for binding shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.</p>	<p><u>પુલના સ્પેશીફિકેશન</u></p> <p>Item: 21 -Providing</p> <p>(A) Mild Steel Reinforcement</p> <p>(B) High Yield Strength Deformed bars. reinforcements.</p> <p><i>(10) Reinforcement shall be measured in length including hooks, if any, separately for differencet diameters as actually used in work, excluding overlaps. From the length so measured, the weight of reinforcement shall be calculated in tonnes on the basis of IS: 1732. Wastage, overlaps, couplings, welded joints, spacer bars, chairs, stays, hangers and annealed steel wire or other methods for binding and placing shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.</i></p>

W/10/11/12/13


Divisional Accounts Officer
 P.I.U.-Tender Cell
 Gandhinagar




 (એન. જી. પરમાર)
 ખાસ ફરજ પરના અધિકારી(વિ.યો.)
 માર્ગ અને મકાન વિભાગ

પ્રતિ.

- 1) અંગત સચિવશ્રી, સચિવશ્રીનું કાર્યાલય, મા.મ.વિભાગ, સચિવાલય, ગાંધીનગર
- 2) અંગત સચિવશ્રી, સચિવશ્રીનું કાર્યાલય, નર્મદા, જ.સં. પા.પુ. અને ક. વિભાગ, સચિવાલય, ગાંધીનગર
- 3) અંગત સચિવશ્રી, અગ્ર સચિવશ્રીનું કાર્યાલય, આરોગ્ય, પ.ક. વિભાગ, સચિવાલય, ગાંધીનગર
- 4) અંગત સચિવશ્રી, અ. મુ. સચિવશ્રીનું કાર્યાલય, શહેરી વિકાસ, શ.ગૃ.નિ.વિભાગ, સચિવાલય, ગાંધીનગર
- 5) અંગત સચિવશ્રી, અગ્ર સચિવશ્રીનું કાર્યાલય, પંચાયત, ગ્રા.ગૃ. નિ. અને ગ્રા. વિ. વિભાગ, સચિવાલય, ગાંધીનગર
- 6) એકાઉન્ટન્ટ જનરલશ્રી, રાજકોટ / અમદાવાદ
- 7) સર્વે મુખ્ય ઈજનેરશ્રીઓ, મા.મ.વિભાગ, સચિવાલય, ગાંધીનગર
- 8) સર્વે મુખ્ય ઈજનેરશ્રીઓ, નર્મદા, જ.સં. પા.પુ. અને ક. વિભાગ, સચિવાલય, ગાંધીનગર
- 9) મેનેજીંગ ડીરેક્ટરશ્રી, ગુજરાત રાજ્ય માર્ગ વિકાસ નિગમ, નિર્માણ ભવન, ગાંધીનગર
- 10) મુ.ઈ. અને ડીરેક્ટરશ્રી, એન્જીનીયરીંગ સ્ટાફ ટ્રેનીંગ કોલેજ, ગાંધીનગર
- 11) ડીરેક્ટરશ્રી, ગુજરાત એન્જીનીયરીંગ રીસર્ચ ઇન્સ્ટીટ્યુટ (ગેરી), વડોદરા
- 12) ઉપ સચિવશ્રી, ગુજરાત તકેદારી આયોગ, તકેદારી ભવન, ગાંધીનગર
- 13) નાણાં સલાહકારશ્રી, મા.મ.વિભાગ, સચિવાલય, ગાંધીનગર
- 14) સર્વે અધિક્ષક ઈજનેરશ્રીઓ, મા.મ.વિભાગ (રાજ્ય, પંચાયત, ને.હા., પાટનગર યોજના વર્તુળ, વિદ્યુત વર્તુળ સહિત)
- 15) સર્વે કાર્યપાલક ઈજનેરશ્રીઓ, (ઉક્ત વર્તુળ હેઠળના.)
- 16) સર્વે તાંત્રિક અધિકારીશ્રીઓ, મા.મ.વિભાગ, સચિવાલય, ગાંધીનગર
- 17) સર્વે તાંત્રિક શાખાઓ, મા.મ.વિભાગ, સચિવાલય, ગાંધીનગર
- 18) પ્રમુખશ્રી, ગુજરાત કોન્ટ્રાક્ટર્સ એસોસિએશન, ગજજર હોલ, લો ગાર્ડન, લો કોલેજ રોડ, અમદાવાદ
- 19) શાખા સીલેક્ટ ફાઈલ - ૨૦૧૭

પા.મ.વ.મુ / અમદાવાદ રીપ) ૨૦૧૭/૧૭

તા. 11 MAY 2017

ગણ પ્રતિ, અધિક્ષક ઇન્જીનરશ્રી તમામ.

કાર્યપાલક ઇન્જીનરશ્રી તમામ.

પા.મ.વ. રીપ - તમામ.


અથવા તથા અમદાવાદ

સહી

Divisional Accounts Officer

P.I.U.-Tender Cell

Gandhinagar

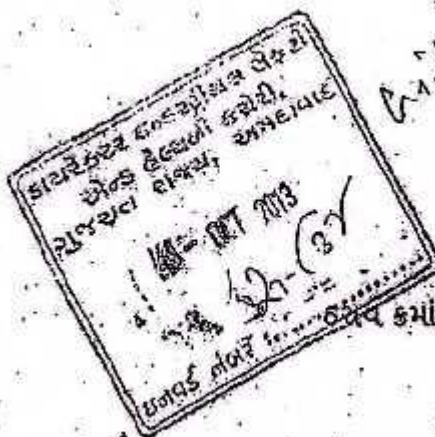

દરમિયાનમાં રાજ્યના મકાનગરપાલિકા આયુક્તશ્રીઓએ 'સેસ'ની રકમની વસુલાતમાં એકસુત્રતા જળવાયુ તે હેતુથી રહેઠાણના બાંધકામ કિસ્સામાં દર ચોરસ મીટરે રૂા ૩૦૦૦/- ની બાંધકામ કિંમત ગણી પ્રતિ ચોરસમીટરના રૂા ૩૦/- મુજબ સેસની રકમની આકારણી અને વસુલાત કરવાની રજુઆત કરતા ગુજરાત મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ બોર્ડ આ અંગે કરાવ પ્રસિધ્ધ કરવા વિનંતી કરતા આ વિભાગના તા. ૨/૬/૨૦૦૬ ના કરાવ ક્રમાંક: સીડબલ્યુએ/૨૦૦૪/૧૮૩૧/મ(૩) થી બાંધકામ ખર્ચની ગણતરી કરી ચોરસ મીટરે રૂા ૩૦૦૦/- નો ખર્ચ ધ્યાનમાં લઈ પ્રતિ ચોરસ મીટરે રૂા ૩૦/- લેખે સુપર બીલ્ડઅપ એરીયા મુજબ સેસની રકમ જમા કરાવવાનું કરાવેલ હતું, પરંતુ બાંધકામ સાધન સાગ્રીની ચીજ-વસ્તુઓની કિંમતમાં વધારા-ઘટાડાને કારણે બાંધકામ ખર્ચની ગણતરીમાં વિસંગતતાઓ સર્જાતા, સેસની રકમ પુનઃ નિર્ધારિત કરવાની જરૂરિયાત ઊભી થયેલ છે. આથી શ્રમ અને રોજગાર વિભાગના તા. ૨/૬/૨૦૦૬ ના કરાવ ક્રમાંક: સીડબલ્યુએ/૨૦૦૪/૧૮૩૧/મ(૩) રદ કરીને બાંધકામ કિંમતના ૧ ટકા લેખે શ્રમિક સેસ વસુલ કરવા અંગેની બાબત સરકારશ્રીની વિચારણા હેઠળ હતી.

કરાવ:-

આથી કાળજીપૂર્વક વિચારણાને અંતે તા. ૨/૬/૨૦૦૬ નો કરાવ ક્રમાંક: સીડબલ્યુએ/૨૦૦૪/૧૮૩૧/મ(૩) રદ કરીને મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ બોર્ડ સેસ અધિનિયમ, ૧૯૯૬ ની કલમ - ૩(૧) અન્વયે નીચેની શરતોને આધીન કુલ બાંધકામ ખર્ચના ૧ ટકા લેખે શ્રમિક કલ્યાણ સેસની વસુલાત કરવાનું કરાવવામાં આવે છે.

- (અ) (૧) માર્ગ અને મકાન વિભાગ, (૨) નર્મદા, જળસંપત્તિ પાણી પુરવઠા અને કલ્પસર વિભાગ, (૩) શહેરી વિકાસ અને શહેરી ગૃહ નિર્માણ વિભાગ, (૪) પંચાયત, ગ્રામ ગૃહ નિર્માણ અને ગ્રામ વિકાસ વિભાગ તેમજ અન્ય વિભાગોએ તેમના નિયંત્રણ હેઠળના બાંધકામોમાં ઇજારદારોના બિલોમાંથી ૧ ટકા સેસ કાપી લઈને, નિર્ધારિત સદરે જમા કરાવવાનો રહેશે.
- (બ) રાજ્ય સરકાર તેમજ કેન્દ્ર સરકારના અન્ય નિગમો/કોર્પોરેશનો તેમજ આવું બાંધકામ કરતાં નિગમો જેવા કે પોલીસ હાઉસીંગ કોર્પોરેશન, ગુજરાત હાઉસીંગ બોર્ડ, ગુજરાત ગ્રામીણ આવાસ નિગમ, આરોગ્ય વિભાગના પ્રોજેક્ટ ઇમ્પ્લીમેન્ટેશન યુનિટ, શિક્ષણ વિભાગના સર્વે શિક્ષા અભિયાનને પણ આ કરાવ લાગુ પડશે અને આ કરાવનો ચૂસ્તપણ પાલન કરવાનો રહેશે.
- (ક) ખાનગી-વ્યક્તિગત ધોરણે નાગરિકો દ્વારા બનાવવામાં આવતા મકાન/દુકાન વિગેરે પ્રકારના બાંધકામને તેમજ તેમાં કરવાના થતાં સુધારા/વધારાને આ કરાવ લાગુ પડશે નહીં.

- (5) દરેક વિભાગે 3 મહિને વિભાગ ફેઝળના બોર્ડ/કોર્પોરેશનો સહિતની બાંધકામ સાથે સંકળાયેલ સંસ્થાઓ આ પ્રકારે બાંધકામ-સેસ વસુલ કરે છે, કે કેમ? તેની સમીક્ષા કરવાની રહેશે.
- (ઈ) સદર સેસની રકમ નીચેના સદરે જમા કરાવવાની રહેશે.

Major Head	0230 - Labour and Employment
Sub Major Head	-
Minor Head	106 - Fees under Contract Labour (Regulation and Abolition) Rules.
Sub Head	(04) Income from Cess levied under Gujarat Building & Other Construction Workers' Welfare Cess Act 1996

- (ચ) આ હુકમનો અમલ આ હુકમ પ્રસિધ્ધ થયા તારીખથી કરવાનો રહેશે.

ગુજરાતના રાજ્યપાલશ્રીના હુકમથી અને તેમના નામે.


(રમજી મહેશ્વરી)

સંયુક્ત સચિવ

શ્રમ અને રોજગાર વિભાગ

પ્રતિ,

- (૧) નામ. રાજ્યપાલશ્રીના સચિવશ્રી, રાજભવન, ગાંધીનગર.
- (૨) માન. મુખ્યમંત્રીશ્રીના અધિક મુખ્ય સચિવશ્રી, સચિવાલય, ગાંધીનગર.
- (૩) સર્વે માન. મંત્રીશ્રીઓના અંગત સચિવશ્રીઓ, સચિવાલય, ગાંધીનગર.
- (૪) સર્વે માન. રા.ક.મંત્રીશ્રીઓના અંગત સચિવશ્રીઓ, સચિવાલય, ગાંધીનગર.
- (૫) મુખ્ય સચિવશ્રીના નાયબ સચિવશ્રી, સચિવાલય, ગાંધીનગર.
- (૬) સચિવાલયના સર્વે વિભાગો (તેમના હસ્તકના તમામ ખાતાના વડાઓ/ બોર્ડ/ કોર્પોરેશનો/કચેરીઓ/સંસ્થાઓને પરિપત્રિત કરવાની વિનંતી સાથે.
- (૭) સચિવશ્રી, ગુજરાત મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ બોર્ડ, અમદાવાદ.
- (૮) નિયામકશ્રી, ઔદ્યોગિક સલામતી અને સ્વાસ્થ્ય, ગુ.રા., શ્રમભવન, અમદાવાદ.
- (૯) નિયામકશ્રી, હિસાબ અને તિજોરી, ડૉ. જીવરાજ મહેતા ભવન, ગાંધીનગર. (તેમના હસ્તકની પગાર અને હિસાબી અધિકારીશ્રીઓની કચેરીઓ તેમજ તમામ જિલ્લા તિજોરી કચેરીઓને પરિપત્રિત કરવાની વિનંતી સાથે.)
- (૧૦) શ્રમ અને રોજગાર વિભાગના સર્વે અધિકારીશ્રીઓ અને સર્વે શાખાઓ.
- (૧૧) વિભાગ હસ્તકના તમામ ખાતાના વડાઓ /બોર્ડ
- (૧૨) શાખા પસંદગી ફાઇલ / નાયબ સેક્શન અધિકારી પસંદગી ફાઇલ.

INSTRUCTIONS OF PERSON TENDERING

(1) Water Supply.

For all purposes connected with the work, the contractor is required to make his own arrangement for sufficient supply of water in such quantity and of such quality and at such places on the work as may be necessary. The rates quoted in the tender are for completed items of works and shall cover cost of water as aforesaid.

The Department may supply the water to the contractor, if so requested to him and if available nearby department source. However, if his request is accepted, the department will in now may be found to continue supply, if arranged, till completion of work and it may be discontinued at any time after giving twenty four hours notice.

If the water is supplied by the Department the charge will be levied at Rs. 5 per Rs. 1000 of the cost of work done. The amount of water charges will be deducted by the Department.

The Department will give one water supply connection free of cost from the main line or place as it is convenient to the Department. The contractor shall have to make his own arrangement for laying the required pipe line from the connection, the same will be given if possible, on payment of necessary charges for the additional connection, as may be decided by the Department.