

### **SPECIAL CONDITION OF CONTRACT**

1. The contractor will have to get all permission / certificates/ NOC from Private / semi-Government / Government or any other relevant competent Authority as per Norms and standards. i.e. Environmental clearance, Special Economic Zone - (SEZ) clearance, Coastal Region Zone (CRZ) / Nagar Palika, Water and Drainage connection from local body, Lift License Fire Fighting Services NOC, D. G. Set approval and other required documents.
2. The material shall strictly confirm to relevant standard mention in the detailed item specifications and prevailing IS / ASTN / ISO / IRC / ICE, local authority and standard guide line as directed by Engineer in charge / Consultant / Architect. The prior approval of the materials to be used should be get from Engineer in charge / Consultant / Architect. Work should be executed in accordance with specification and best modern practices.
3. Contractor shall bare own arrangement for drinking water, distribution water, power connection for construction / testing other facilities like D. G. Set, Compressor etc. for construction work.
4. Permanent Bench Mark for each special features shall be furnished by contractor prior topurchase of material, actual installation, lay out and fixing level etc. shall be done at his own cost.
5. The contractor shall protect and maintain during course of work the main center line, Bench Mark should be undisturbed even after completion of work.
6. Contractor has to maintain the safe path for vehicle, Pedestrian in the hospital campus.
7. Contractor is solely responsible for the damages of existing/ adjoining/ nearby structures during the construction. Any damages or defects shall have to be rectified by his own cost and risk. No any payment shall be made against for the same.
8. Condition of contract is as per form B2 attached herewith and as per special condition of contract attached herewith.
9. The project will be Governed as per prevailing Indian Standards and other equivalent standards other than mentioned in the tender document as approved by engineer in charge/ Consultant / Architect.
10. The law governing in the contract will be Indian law.
11. All the rates are inclusive of all taxes levied by state and central Government. No any separate payment shall be paid.
12. State Govt. R & B Department all GR applicable to Contractor for their Execution work. Also, during contract period if any new GR from R & B Department will be published, it will be also Considered.
13. Contractor should submit statutory compliances (ESIC, EPFO etc.) to client. Before submitting the final bill contractor have to clear all statutory compliances (ESIC, EPFO etc.) document.

#### **General Note:**

1. All Concrete Work content as per grade (without fly ash as per item description) and as per latest IS 456 for all PCC & RCC elements of all shape, all size, at all places and heights/ depths including transporting, laying of concrete to site by any means like pumping or tower crane etc., finishing and curing etc. and including Admixtures in recommended proportions as per IS 9103 to accelerate, retard setting of concrete as per direction of Engineer-in- charge. Rate shall be inclusive of providing grooves, drip molds, ghazis, pockets, cut outs etc. and labour for insert sleeves if any wherever required while casting. Rate also to include lift charges and scaffolding for any heights / depths from FFL/GL. (unless otherwise specified)
2. All formwork should be rigid & water tight using best quality of Laminated Marine shuttering ply with supporting system of MS adjustable steel props / spans / frames for any shapes, sizes, planes including strutting, propping, bracing, staging etc., complete to give smooth & fair finish & including false staging work
3. Production of cement concrete shall be in fully computerized batching plant and placing the concrete by pump / placer boom / Tower crane etc.

# Agreement

I understand that i shall not claim any compensation for Any item what so ever not executed or executed in lesser Quantity then what has been shown in the B O Q. this Close supersedes all the provision made so far saving of Any item in the tender.

## ઈજારદારશ્રીઓ માટે વિશેષ નોંધ

ઉપરોક્ત ટેન્ડરની આઈટમોના બાવ ભરતી વખતે ઈજારદારશ્રીએ નીચેની બાબતોની ખાસ નોંધ લેવી.

- (૧) બાંધકામમાં વાપરવામાં આવનાર ઈટો ચિમની ભઠ્ઠાની તથા સ્પેશયલ કપચી, શ્રીટ, રેતી વિગેરે મટીરીયલ્સ સદર કામના ટેન્ડરના સ્પેશિફિકેશન પ્રમાણેનું ઉચ્ચ ગુણવત્તા ધરાવતું લાવવાનું રહેશે. (સ્પેશયલ ક્લા)
- (૨) લાકડાની આઈટમમાં ઉપયોગમાં લેવાનું લાકડુ સ્પેશિફિકેશન પ્રમાણેનું ફક્ત સાગનું જ લાવવાનું રહેશે.
- (૩) બારી-બારાણની ફેમ અને શંટર માટે ઉપયોગમાં લેવામાં આવનાર એલ્યુમીનીયમ સેકશન આઈટમના સ્પેશિફિકેશન પ્રમાણેની સ્પર્ધાનું અને એકમ વજનનું હોવું જરૂરી છે. તેમજ જે તે એલ્યુમીનીયમ સેકશન સસમ કક્ષાની પાસે મંજૂર કરાવીને જ વાપરવાનું રહેશે.
- (૪) સેનેટરી મટીરીયલ્સ સ્પેશિફિકેશનમાં દર્શાવ્યા પ્રમાણેની સ્પર્ધાનું-ધોરણવાળા અને સસમ ક્ષમ્યે મંજૂર કરેલ સેમ્પલ મુજબના જ લાવવાના રહેશે.
- (૫) બારી-દરવાજાના ફિક્ચર-ફાસ્ટીંગ સ્પેશિફિકેશન પ્રમાણેના પારા-ધોરણવાળા અને સસમ કક્ષાએ મંજૂર કરેલ સેમ્પલ મુજબના જ લાવવાના રહેશે.
- (૬) સદર કામમાં વાપરવામાં આવનાર ફ્લોરીંગ માટેની રાઈલ અને ફોલ સ્ટોન સ્પેશિફિકેશન પ્રમાણેના જ જાડાઈના અને ઉચ્ચ ગુણવત્તા ધરાવતા હોવા જોઈએ અને સેમ્પલ સસમ કક્ષાએ મંજૂર કરાવ્યા મુજબના જથ્થો લાવવાનો રહેશે.
- (૭) બાંધકામમાં વાપરવામાં આવનાર માલસામગ્રી એન્જીનીયર ઈન્ચાર્જ બારા એક્ટિવ સેમ્પલ મુજબના વાપરવાનો રહેશે.
- (૮) સંપૂર્ણ કામની વર્કમેનશીપ લાઈન લેવલમાં હોવી જોઈએ તેમજ પોલીશીંગ અને ડિનિશીંગની કામગીરી ઉચ્ચ કક્ષાની કરવાની રહેશે.
- (૯) ટેન્ડર સાથે યંત્રો, ઓજારો તથા માલુ જામ પટના કામોની વિગત ઈજારદારશ્રી બારા પુરી પાડવાની રહેશે.
- (૧૦) બિલ દર મહિને રજૂ કરવા બાબત : આગલા માસમાં કરી આપેલ બધા કામ માટે હવાલાના ઈજનેર નક્કી કરેલ હોય તે તારીખ અથવા તે પહેલાં દર મહીને કોન્ટ્રાક્ટરે બિલ રજૂ કરવાનું રહેશે. અને એ કામની ખરાઈ કરવાના ઉદ્દેશથી હવાલાના ઈજનેર જરૂરી માપ લેશે. અથવા લેવડાવશે. અને બિલ રજૂ થયા બાદ શંટ અથવા એલ.ઓ.સી.ઉપલબ્ધ થયે તેનું ચુકવણું કરવામાં આવશે. કામ થયા બાદ તેના બિલનું ચુકવણું વિલંબથી થાય તો તે અંગે કોઈ વ્યાજ ચુકવવા પાત્ર બનશે નહીં. ઉપર જણાવ્યા મુજબના નિયત સમયની અંદર કોન્ટ્રાક્ટર બિલ રજૂ નહીં કરે તો હવાલાના ઈજનેર પોતાના તાબાના કોઈપણ અધિકારીને કોન્ટ્રાક્ટરે અધિકૃત કરેલ એજન્સીની હાજરીમાં ઉક્ત કામનું માપ લેવા બોલ્યો અને તેની માપમાપી પરની કોન્ટ્રાક્ટરની કે તેના એજન્ટની સહી, તેના અનુમોદન માટે પુરતી ગણાયો. અને હવાલાના ઈજનેર આવી માપીમાંથી બીલ બનાવશે, જે કોન્ટ્રાક્ટરને બધી બાબતમાં બંધન કરતું રહેશે.
- (૧૧) વીડી ફાઇનલ ટેન્ડર કોન્ટ્રાક્ટરની હાજરીમાં રહેશે.

ઈજારદારની સહી.

## INSTRUCTIONS OF PERSON TENDERING

### (1) Water Supply.

For all purposes connected with the work, the contractor is required to make his own arrangement for sufficient supply of water in such quantity and of such quality and at such places on the work as may be necessary. The rates quoted in the tender are for completed items of works and shall cover cost of water as aforesaid.

The Department may supply the water to the contractor, if so requested to him and if available nearby department source. However, if his request is accepted, the department will in now may be found to continue supply, if arranged, till completion of work and it may be discontinued at any time after giving twenty four hours notice.

If the water is supplied by the Department the charge will be levied at Rs. 5 per Rs. 1000 of the cost of work done. The amount of water charges will be deducted by the Department.

The Department will give one water supply connection free of cost from the main line or place as it is convenient to the Department. The contractor shall have to make his own arrangement for laying the required pipe line from the connection, the same will be given if possible, on payment of necessary charges for the additional connection, as may be decided by the Department.



મકાન તથા પુલોના આર.સી.સી. કામોમાં  
લોખડના સળીયાના માપો લાખવા તથા  
ચૂકવણમાં લેપ લેન્ય ની લંબાઈ  
ગણતરીમાં નહીં લવા બાબત

ગુજરાત સરકાર  
માર્ગ અને મકાન વિભાગ

સચિવાલય, ગાંધીનગર

પરિપત્ર ક્રમાંક:- PDW-10-2017-01-C

તા.૧૫-૦૨-૨૦૧૭

પરિપત્ર:-

મકાન, રસ્તા અને પુલોના કામોમાં આર.સી.સી. આઇટમોમાં સમાવિષ્ટ સ્ટીલ રેઇનફોર્સમેન્ટના માપો લખવા અને ચૂકવણ દરમ્યાન લેપની લંબાઈ ગણતરીમાં લેવામાં આવે છે. રેઇનફોર્સમેન્ટમાં લેપની વધુ સંખ્યાને પ્રોત્સાહન ન આપતા સળંગ રેઇનફોર્સમેન્ટ (સળીયા) જ મહદઅંશે વપરાય એ તાંત્રિક રીતે વધુ યોગ્ય છે.

MORT&H સ્પેશીફિકેશનના પ્રવર્તમાન ધારાધોરણ મુજબ રેઇનફોર્સ (સળીયા)ના ચૂકવણમાં લેપની લંબાઈના માપો ગણતરીમાં લેવામાં આવતા નથી. (Section 1608)

MORT&H સ્પેશીફિકેશનના પ્રવર્તમાન ધારાધોરણ મુજબ માર્ગ અને મકાન વિભાગ હેઠળ મકાન, રસ્તા અને પુલના રેઇનફોર્સ (સળીયા)ના સ્પેશીફિકેશનમાં Mode of Measurement & Payment માં હવે પછી નીચે મુજબના ફેરફાર કરવા આથી સુચના આપવામાં આવે છે.

<u>EXISTING ITEM</u>	<u>PROPOSED AMENDMENT</u> (As per MORT&H Speciafication Item No.1608)
મકાનના સ્પેશીફિકેશન	મકાનના સ્પેશીફિકેશન
5.4.10 Providing an Mild Steel reinforcement for R.C.C. work including bending binding and placing in position etc. complete up to floor two level.	5.4.10 Providing an Mild Steel reinforcement for R.C.C. work including bending binding and placing in position etc. complete up to floor two level.
5.4.11 High yield deform bars steel reinforcement for R.C.C. work including bending, binding and placing in position complete up to floor two level.	5.4.11 High yield deform bars steel reinforcement for R.C.C. work including bending, binding and placing in position complete up to floor two level.
3.2 Reinforcement shall be measured in length including overlaps, separately for different diameters as actually used in the work. Where welding or coupling is resorted to in place lap joints, such	3.2 Reinforcement shall be measured in length including hooks, if any, separately for differencnt diameters as actually used in work, excluding overlaps. From the length so

Circulate

All  
SE



<p>joints shall be measured for payment as equivalent length of overlap as per design requirement from the length so measured. the weight of reinforcement shall be calculated in tones on the same basis of as per M-18 even though steel is supplied to the contractor by the department on actual weight. Length shall include hooks at the ends Wastage and annealed steel wire for binding shall not be measured and the cost of these items shall be deemed to be included in the rate for reinforcement.</p>	<p>measured, the weight of reinforcement shall be calculated in tonnes on the basis of IS: 1732. Wastage, overlaps, couplings, welded joints, spacer bars, chairs, stays, hangers and annealed steel wire or other methods for binding and placing shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.</p>
<u>EXISTING ITEM</u>	<u>PROPOSED AMENDMENT</u> (As per MORT&H Speciafication Item No.1608)
<p><u>रस्तांना स्पेशीलीकेशन</u></p> <p><b>Item No. 39 :</b> Providing steel reinforcement.</p> <p>a) Providing and placing in position mild steel bar reinforcement including cutting, bending, hooking and tying complete as per details.</p> <p>b) High yield strength deformed bars reinforcement.</p> <p>(10) Reinforcement shall be measured in length separately for different diameters as actually used in the work. from the length so measured the weight of reinforcement shall be calculated in tones on the same basis of IS : 1732 even though steel is supplied to the contractor by the Department on actual wieghment. Length shall ilcude hooks at ends. Wastage and annealed steel wire for binding shall not be measured and cost of thes items shall be deemed to be</p>	<p><u>रस्तांना स्पेशीलीकेशन</u></p> <p><b>Item No. 39 :</b> Providing steel reinforcement.</p> <p>a) Providing and placing in position mild steel bar reinforcement including cutting, bending, hooking and tying complete as per details.</p> <p>b) High yield strength deformed bars reinforcement.</p> <p>(10) Reinforcement shall be measured in length including hooks, if any, separately for differencd diameters as actually used in work, excluding overlaps. From the length so measured, the weight of reinforcement shall be calculated in tonnes on the basis of IS: 1732. Wastage, overlaps, couplings, welded joints, spacer bars, chairs, stays, hangers and annealed steel wire or</p>



included in the rates for reinforcement.	other methods for binding and placing shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.
<p><u>પલના સ્પેશીફિકેશન</u></p> <p>Item: 21 -Providing</p> <p>(A) Mild Steel Reinforcement</p> <p>(B) High Yield Strength Deformed bars. reinforcements.</p> <p>(10) Reinforcement shall be measured in length including overlaps, separately for different diameter. as actually used in the work, where welding or coupling is restored to, in place of lap-joints, such joints shall be measured for payment as the equivalent length of over lap as per design requirement. From the length so measured the weight of reinforcement shall be calculated in tones on the same basis of IS 1732 even though steel is supplied to the contractor by the Department on actual weighment. Length shall include hooks at ends. Wastage and annealed steel wire for binding shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.</p>	<p><u>પલના સ્પેશીફિકેશન</u></p> <p>Item: 21 -Providing</p> <p>(A) Mild Steel Reinforcement</p> <p>(B) High Yield Strength Deformed bars. reinforcements.</p> <p>(10) Reinforcement shall be measured in length including hooks, if any, separately for differencet diameters as actually used in work, excluding overlaps. From the length so measured, the weight of reinforcement shall be calculated in tonnes on the basis of IS: 1732. Wastage, overlaps, couplings, welded joints, spacer bars, chairs, stays, hangers and annealed steel wire or other methods for binding and placing shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.</p>


2

Divisional Accounts Officer  
P.I.U.-Tender Cell  
Gandhinagar

02

*aydum*  
(એન. જી. પરમાર)  
ખાસ ફરજ પરના અધિકારી(વિ.ચો.)  
માર્ગ અને મકાન વિભાગ



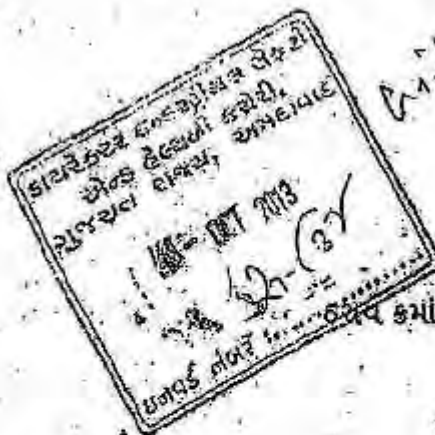

મકાન અને અન્ય બાંધકામ શ્રમચોગી  
કલ્યાણ સેસ અધિનિયમ, ૧૯૯૭ ફેલ  
સેસની રકમ નક્કી કરવા અંગે

ગુજરાત સરકાર

શ્રમ અને રોજગાર વિભાગ

ક્રમાંક: સીડબલ્યુએ/૧૩૨૦૧૩/૨૭૭૨૭/મ(૩)

સચિવાલય, ગાંધીનગર,

AL29/06/2043

વંશાણે લીધા:-

- (૧) મકાન અને અન્ય બાંધકામ શ્રમચોગી કલ્યાણ સેસ અધિનિયમ, ૧૯૯૬
- (૨) ભારત સરકાર, શ્રમ મંત્રાલયની તા. ૨૬/૯/૧૯૯૬ ની જાહેરનામા ક્રમાંક: ૨૮૯૯
- (૩) શ્રમ અને રોજગાર વિભાગના તા. ૩૦/૧/૨૦૦૬ ની ઠરાવ ક્રમાંક: સીડબલ્યુએ/૨૦૦૪/૮૪૧/મ(૩)
- (૪) શ્રમ અને રોજગાર વિભાગના તા. ૨/૬/૨૦૦૬ ની ઠરાવ ક્રમાંક: સીડબલ્યુએ/૨૦૦૪/૧૮૩૧/મ(૩)

प्रास्ताविक:-

ભારત સરકારે બાંધકામ શ્રમયોગીઓના કલ્યાણ માટે મકાન અને અન્ય બાંધકામ શ્રમયોગી (નોકરીનું નિયમન અને સેવાઓ) શરતો) અધિનિયમ, ૧૯૮૬ અને મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ સેસ અધિનિયમ, ૧૯૮૬ ઘડેલાં છે. રાજ્ય સરકારે પણ બાંધકામ શ્રમયોગીઓ માટે મકાન અને અન્ય બાંધકામ શ્રમયોગી (નોકરીનું નિયમન અને સેવાઓ) શરતો) નિયમો, ૨૦૦૩ બહાર પાડેલ છે. તેમજ આ અધિનિયમ અને નિયમો ફેદળ ગુજરાત મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ બોર્ડની રચના કરવામાં આવેલ છે. આ બોર્ડની આવકનું મુખ્ય સ્ત્રોત મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ સેસ અધિનિયમ, ૧૯૮૬ ની કલમ - ૩(૧) અન્વયે બાંધકામના કુલ ખર્ચના ૨% થી વધારે નહીં અને ૧% થી ઓછી નહીં તેટલી રકમની સેસની વસુલાતની છે. ભારત સરકારે વંચાણે લીધા ક્રમાંક - ૩૨ સામેના જાહેરનામાંથી કુલ બાંધકામ ખર્ચની રકમના ૧ ટકા લેખે સેસ વસુલાત કરવાનું ઠરાવેલ છે. ગુજરાત સરકારે પણ આ બંને કાયદાના અમલીકરણ માટે તા. ૩૦/૧/૨૦૦૬ ના વંચાણે લીધા ક્રમાંક - ૩૨ ના ઠરાવથી સુચનાઓ બહાર પાડી સરકારના સર્વે વિભાગો, જાહેર નિગમો તથા સ્થાનિક સ્વરાજ્યની સંસ્થાઓને કાયદાની જોગવાઈ મુજબ સેસની રકમ ચુકવવા જણાવેલ છે. અને તેમના અંદાજોમાં ૧ ટકા સેસની રકમ ઉમેરીને અંદાજો તૈયાર કરવાની સુચનાઓ આપેલ છે.

દરમિયાનમાં રાજ્યના મહાનગરપાલિકા આયુક્તશ્રીઓએ 'સેસ'ની રકમની વસુલાતમાં એકસુત્રતા જળવાયુ તે હેતુથી રહેઠાણના બાંધકામ કિસ્સામાં દર ચોરસ મીટરે રૂા ૩૦૦૦/- ની બાંધકામ કિંમત ગણી પ્રતિ ચોરસમીટરના રૂા ૩૦/- મુજબ સેસની રકમની આકારણી અને વસુલાત કરવાની રજુઆત કરતા ગુજરાત મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ બોર્ડ આ અંગે કરાવ પ્રસિધ્ધ કરવા વિનંતી કરતા આ વિભાગના તા. ૨/૬/૨૦૦૬ ના કરાવ ક્રમાંક: સીડબલ્યુએ/૨૦૦૪/૧૮૩૧/મ(૩) થી બાંધકામ ખર્ચની ગણતરી કરી ચોરસ મીટરે રૂા ૩૦૦૦/- નો ખર્ચ ધ્યાનમાં લઈ પ્રતિ ચોરસ મીટરે રૂા ૩૦/- લેખે સુપર બીલ્ડઅપ એરીયા મુજબ સેસની રકમ જમા કરાવવાનું કરાવેલ હતું. પરંતુ બાંધકામ સાધન સાગરીની ચીજ-વસ્તુઓની કિંમતમાં વધારા-ઘટાડાને કારણે બાંધકામ ખર્ચની ગણતરીમાં વિસંગતતાઓ સર્જાતા, સેસની રકમ પુનઃ નિર્ધારિત કરવાની જરૂરિયાત ઊભી થયેલ છે. આથી શ્રમ અને રોજગાર વિભાગના તા. ૨/૬/૨૦૦૬ ના કરાવ ક્રમાંક: સીડબલ્યુએ/૨૦૦૪/૧૮૩૧/મ(૩) રદ કરીને બાંધકામ કિંમતના ૧ ટકા લેખે શ્રમિક સેસ વસુલ કરવા અંગેની બાબત સરકારશ્રીની વિચારણા હેઠળ હતી.

#### કરાવ:-

આથી કાળજીપૂર્વક વિચારણાને અંતે તા. ૨/૬/૨૦૦૬ નો કરાવ ક્રમાંક: સીડબલ્યુએ/૨૦૦૪/૧૮૩૧/મ(૩) રદ કરીને મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ બોર્ડ સેસ અધિનિયમ, ૧૯૯૬ ની કલમ - ૩(૧) અન્વયે નીચેની શરતોને આધીન કુલ બાંધકામ ખર્ચના ૧ ટકા લેખે શ્રમિક કલ્યાણ સેસની વસુલાત કરવાનું કરાવવામાં આવે છે.


- (અ) - (૧) માર્ગ અને મકાન વિભાગ, (૨) નર્મદા, જળસંપત્તિ પાણી પુરવઠા અને કલ્પસર વિભાગ, (૩) શહેરી વિકાસ અને શહેરી ગૃહ નિર્માણ વિભાગ, (૪) પંચાયત, ગ્રામ ગૃહ નિર્માણ અને ગ્રામ વિકાસ વિભાગ તેમજ અન્ય વિભાગોનો તેમના નિયંત્રણ હેઠળના બાંધકામોમાં ઇશ્વરદારોના બિલોમાંથી ૧ ટકા સેસ કાપી લઇને, નિર્ધારિત સદરે જમા કરાવવાનો રહેશે.
- (બ) રાજ્ય સરકાર તેમજ કેન્દ્ર સરકારના અન્ય નિગમો/કોર્પોરેશનો તેમજ આવું બાંધકામ કરતા નિગમો જેવા કે પોલીસ હાઉસીંગ કોર્પોરેશન, ગુજરાત હાઉસીંગ બોર્ડ, ગુજરાત ગ્રામીણ આવાસ નિગમ, આરોગ્ય વિભાગના પ્રોજેક્ટ ઇમ્પ્લીમેન્ટેશન યુનિટ, શિક્ષણ વિભાગના સર્વે શિક્ષા અભિયાનને પણ આ કરાવ લાગુ પડશે અને આ કરાવનો ચૂસ્તપણ પાલન કરવાનો રહેશે.
- (ક) ખાનગી-વ્યક્તિગત ધોરણે નાગરિકો દ્વારા બનાવવામાં આવતા મકાન/દુકાન વિગેરે પ્રકારના બાંધકામને તેમજ તેમાં કરવાના થતાં સુધારા/વધારાને આ કરાવ લાગુ પડશે નહીં.

- (ડ) દરેક વિભાગે ૩ મહિને વિભાગ ફેઝના બોર્ડ/કોર્પોરેશનો સહિતની બાંધકામ સાથે સંકળાયેલ સંસ્થાઓ આ પ્રકારે બાંધકામ-સેસ વસુલ કરે છે કે કેમ? તેની સમીક્ષા કરવાની રહેશે.
- (ઈ) સદર સેસની રકમ નીચેના સદરે જમા કરાવવાની રહેશે.

Major Head	0230 – Labour and Employment
Sub Major Head	-
Minor Head	106 – Fees under Contract Labour (Regulation and Abolition) Rules.
Sub Head	(04) Income from Cess levied under Gujarat Building & Other Construction Workers' Welfare Cess Act 1996

- (ચ) આ હુકમનો અમલ આ હુકમ પ્રસિધ્ધ થયા તારીખથી કરવાનો રહેશે.

ગુજરાતના રાજ્યપાલશ્રીના હુકમથી અને તેમના નામે.

  
(રમણ મહેરવા)

સંયુક્ત સચિવ

શ્રમ અને રોજગાર વિભાગ

ખાતે.

- (૧) નામ. રાજ્યપાલશ્રીના સચિવશ્રી, રાજભવન, ગાંધીનગર.
- (૨) માન. મુખ્યમંત્રીશ્રીના અધિક મુખ્ય સચિવશ્રી, સચિવાલય, ગાંધીનગર.
- (૩) સર્વે માન. મંત્રીશ્રીઓના અંગત સચિવશ્રીઓ, સચિવાલય, ગાંધીનગર.
- (૪) સર્વે માન. રા.ક.મંત્રીશ્રીઓના અંગત સચિવશ્રીઓ, સચિવાલય, ગાંધીનગર.
- (૫) મુખ્ય સચિવશ્રીના નાયબ સચિવશ્રી, સચિવાલય, ગાંધીનગર.
- (૬) સચિવાલયના સર્વે વિભાગો (તેમના હસ્તકના તમામ ખાતાના વડાઓ/ બોર્ડ/ કોર્પોરેશનો/કચેરીઓ/સંસ્થાઓને પરિપત્રિત કરવાની વિનંતી સાથે.
- (૭) સચિવશ્રી, ગુજરાત મકાન અને અન્ય બાંધકામ શ્રમયોગી કલ્યાણ બોર્ડ, અમદાવાદ.
- (૮) નિયામકશ્રી, ઔદ્યોગિક સલામતી અને સ્વાસ્થ્ય, ગુ.રા., શ્રમભવન, અમદાવાદ.
- (૯) નિયામકશ્રી, હિસાબ અને તિજોરી, ડો. જીવરાજ મહેતા ભવન, ગાંધીનગર. (તેમના હસ્તકની પ્રગાર અને હિસાબી અધિકારીશ્રીઓની કચેરીઓ તેમજ તમામ જિલ્લા તિજોરી કચેરીઓને પરિપત્રિત કરવાની વિનંતી સાથે.)
- (૧૦) શ્રમ અને રોજગાર વિભાગના સર્વે અધિકારીશ્રીઓ અને સર્વે શાખાઓ.
- (૧૧) વિભાગ હસ્તકના તમામ ખાતાના વડાઓ /બોર્ડ
- (૧૨) શાખા પસંદગી ફાઇલ / નાયબ સેક્શન અધિકારી પસંદગી ફાઇલ.



## GENERAL CONDITION OF CONTRACT

cl2

### **SITE TO BE CLEAN:**

The contractor undertakes to have the site clean, free from rubbish to the satisfaction of the Engineer-in-Charge. All surplus materials, rubbish, etc. will be removed to the place fixed by the Engineer-in-Charge and nothing extra will be paid.

Contractor shall divert/ remove/ maintain/ repair all the existing services like water supply, drainage, storm water, electric etc. at his own cost which will affect the construction activity up to end of the project. During excavation of any kind of activity if any existing lines of any type come in a way throughout construction area. It is contractor responsibility to divert/repair/replace/provide new lines if required contractor has to take necessary approval from any authority for the same. No extra cost will be given for the same.

On completion of the works, the contractor shall clear away and remove from the site surplus materials, rubbish and temporary works of every kind (including site office) and leave the whole site and works clean and in workman like condition to the satisfaction of Owner at his own cost. If the contractor fails to clear the site within 15 days after completion/ submission of final bill whichever is earlier, it shall forfeit all his claims and the owner may get the site cleared at contractor's cost.

### **NO PERMANENT STRUCTURES TO BE CONSTRUCTED WITHIN CAMPUS AREA**

Since the campus is under full fledged utilization for Medical Services / Health Services and laying of infrastructure facilities may be taken up for any area at any time contractor will not be permitted to construct any pucca structure (except site office) for any purpose within the Campus area for what so ever reason.

### **INCONVENIENCE TO CLIENT'S ACTIVITIES:**

The contractor shall not deposit materials on any site which will seriously inconvenience to any of the Client's activities. The Engineer-in-Charge may require the contractor to remove any materials which are considered by him to be dangerous or inconvenient to the activities of the Client or get them removed at the contractor's cost.

Contractor shall divert/ remove/ maintain/ repair all the existing services like compound wall water supply, drainage, storm water, electric etc. at his own cost which will affect the construction activity up to end of the project. During excavation of any kind of activity if any existing lines of any type come in a way throughout construction area. It is contractor responsibility to divert/repair/replace/provide new lines if required contractor has to take necessary approval from any authority for the same. No extra cost will be given for the same.



## CONDITIONS RELATING TO THE EXECUTION OF ADDITIONAL WORK:

No deviation from specification stipulated in the contract of additional items shall be carried out by the contractor unless the rates of the substituted, altered or additional item have been approved in writing by the competent authority, failing which Client will not be bound to entertain any claim on this account.

Contractor has to provide necessary certificate where ever it is asked for in the items of BOQ or in specifications or elsewhere in the tender or as per requirement of EIC

## CONTRACTOR'S RESPONSIBILITY TO GET APPROVAL ON MATERIAL SAMPLE / MOCK UP / SAMPLE ROOM:

Contractor shall have to get approval from Engineer in Charge on loose samples (i.e. flooring material, stone, sanitary ware fixtures, faucets, light fixtures etc.) prior to starting of any works (i.e. finishing, plumbing, firefighting, HVAC, False ceiling, etc.) Loose samples approval is required for the product conformity specification and shade selection. A sample room, as per the layout proposed by Architect and specifications recommended by Architect, shall be prepared and up to date maintained in lock and key arrangement till completion of work awarded under the specific tender. Sample room approval is required for workmanship, fast process in repetitive work and save time for repetitive activity. Contractor will be solely responsible if failing to do so and shall be liable for penalty, which will be solely upon discretion of Engineer-in-charge, which shall be deducted from RA Bill. If contractor cannot show sample room within two months firm shall be penalized by client.

In case of dewatering for any reason (including rain water logging) or of any sort for construction is required, the contractor has to make his own dewatering, plumbing and disposal arrangement for which no claim shall be entertained.

In case of furniture/ high end material, an inspection, as written in the technical specifications, is compulsory. In addition to this, inspection from Architect/P.U. engineer or both, shall also be necessary before dispatch of the material to the site.

Any extra item and or Excess Quantity shall be first got approved from the competent authority of P.U. before implementation.

Barricading all around the building/ campus as per the safety norms is compulsory within 15 days after getting work order otherwise, failing which the penalty @ 0.1% of the total cost of the particular building, per week shall charge till the barricading is done. Contractor shall provide barricading within 15 days after getting work order otherwise Rs. 10,000/- per day penalty will be imposed as penalty over and above L.D.



The campus is equipped with lots of tree surrounding the proposed building and proposed road. The contractor has to take care and protect each and every plants/tree failing of which the penalty @ Rs.10,000/- per tree/plant shall charge.

Quoted rate are inclusive all kind of taxes and cess, custom, Excise duty, Vat, Tax leviable after implementation of GST and other taxes etc. applicable at the time of execution

(1) G.S.T. at the rate of 2.00% of value of work done shall be recovered from contractor's bills.

(2) Contractor shall have to give his G.S.T. Registration No while submitting his tender Online.

**CONTRACTOR TO SUBMIT GUARANTEE BOND OF BOQ ITEM IN WHICH "GUARANTEE BOND OR PERFORMANCE BOND" IS REQUIRED & FOLLOW THE SAME GOVERNMENT APPROVED FORMAT.**

This guarantee shall remain force for the period of 10 years from the completion of the work under the contract and it shall remain binding to the contractor for period of 10 years. The deposit at the rate 10% of the cost of these item from the running and final bills be recovered over and above S.D. and be refunded only after the completion of the guarantee period as after said & applicable for all other specified items in BOQ in which guarantee bond or performance bond is required to submit.

## SERVICES GURANTEE

To,  
COMMISSIONER OF HEALTH,  
PROJECT IMPLEMENTATION UNIT,  
23/3, "CH" type, Sector-30  
Gandhinagar: 382030.

Subject: -

Agency: -

### China Mosaic Flooring with Water Proofing

SITUATION: -

----- ISA Proprietorship  
Company, (hereinafter referred to as -----  
----- Guarantee to each customer of building waterproofed by -----  
----- During the period set forth in  
the said corticated, at its own expense, make any repairs. resulting solely from  
ordinary wear and tear by the elements that may be necessary to maintain said  
roof in water tight condition. The terms ordinary wear and tear by the elements as  
used herein shall not include damage caused by lighting, earthquake, windstorm,  
hailstorm and other phenomena of the elements.

This Guarantee is issued, subject to the following further condition

- (a) The owner of the said roof shall nobly -----  
----- Promptly: in writing it such repairs are  
requested.
- (b) Nothing in this certificate shall under -----  
----- Liable in any respect of any damage to the  
said building or any contents hereof or for nay consequential  
damages.
- (c) ----- Will not  
libel for any damage to the said roof caused by :
  - 1. Traffic or storage of material there on.
  - 2. Settlement expansion construction, distortion cracking or failure of  
the roof deck, copings walls structural members of foundation of the  
said building.

3. Distinction expansion or construction of any unbounded fleshing or any metal work.
  4. Failure of any materials used as a roof base or as insulation over which treatment is applied
  5. Failure of materials supplied by others.
  6. Inhltration or condensation of moisture in thought around the walls copings building structure or underlying or surrounding materials.
- (d) All liability of -----  
 Shall cease immediately and automatically if the said roof is used in a manner or for a purpose for which it was not designated or any if additions, alterations or repairs ( excepting only emergency temporary repairs) are made by anyone expect -----  
 ----- Using -----  
 --- Materials under the supervision of or subject to the inspection of ----  
 -----
- (e) Where the cement and/or other traffic surfaces are built over the sailed roof ----- Will not be responsible under this Guarantee for the expanse or removing or replacing such traffic surface or for repairing any damage to the roof occasioned by the installation or action of such surfaces.
- (f) Guarantee stands invalid on non- settlement of full and final payment
- (g) Service Guarantee valid up to Ten Years from the Date of Completion
- Certificate i.e. dated ----- to Dated -----

**Done at**

**Name and first Name: -**

**On behalf of**

**Signature**

**(Stamp of the body providing the guarantee)**

## SERVICES GURANTEE

To,  
COMMISSIONER OF HEALTH,  
PROJECT IMPLEMENTATION UNIT,  
23/3, "CH" type, Sector-30  
Gandhinagar: 382030.

**Subject:**

**Agency: -**

### FOR THE WORK AS OF TERMITE CONTROL

We, The undersigned, -----  
-----, hereby declare that we will guarantee, as principal debtor, to  
Commissioner of Health Medical Services and Medical Education & Research,  
Government of Gujarat, 3<sup>rd</sup> Floor, Block No F, Civil Hospital, Gandhinagar -  
382012 ) on behalf of, -----,  
The amount of the guarantee will be based on the total cost of related items for  
termite control. This amount will be ascertained at time of final bill. The payment  
will be made without dispute in receipt of a first written request from the  
beneficiary.

### SITUATION: -

As per terms and condition of the contract w e, the undersigned agree to  
indemnify the Contracting Authority from any loss and damage the might be  
caused on account of defective termite control.

We hereby guarantee to make good any loss on damage suffered by the  
Contracting Authority and also the defective and affected work and any related  
damage incurred, without claiming any extra cost.



The guarantee will take effect from the (Completion date of work) and will remain in force for 10 years after this deadline and shall remain binding to the contractor for that period Dated ----- to Dated -----

10 % of the cost of this guarantee shall be governed by the Arbitration and conciliation Act of 11996 and fall within the competence of state of Gujarat.

**Done at**

**Name and first Name: -**

**On behalf of**

**Signature**

**(Stamp of the body providing the guarantee)**

## **SPECIAL CONDITION**

The unit rates controlled cement concrete items for RCC work of mix M-150, M-200, M-250, M-350 and M-400 Include in taken considering cement consumption as shown below in table-A

**TABLE-A**

SR NO	Grade Of Controlled Cement Concrete.	Cement consumption as per S.O.R.in Kg / Cu.M	Remarks
1	M-150	320	
2	M-200	360	
3	M-250	380	
4	M-300	410	
5	M-350	425	
6	M-400	440	

The contractor has to submit the mix design for different grades of cement Concrete at his own cost before execution as directed and to be approved from the Executive in charge. Reduction in rates of RCC items put into the tenders by the contractor shall be given according to the cement consumption of the approved mix design of cement concrete for that item if the cement consumption of the approved mix design of cement concrete for that item if the cement consumption of the mix design is less than as prescribed in Table-A. The recovery shall be carried out as per the input rate of cement mentioned in clause-59.A/60 A the condition is also application to the (i) excess quantity for RCC items and (ii) extra Rate lists. this condition is to be followed in addition to clause-14, This condition is not applicable of Ready Mix concrete Items.

If there will be any change in grade of concrete items only the cost difference of cement will be paid/debited/deducted from concerned items as per mix design, if RMC plant procured of side by agency star rate will be payable and if due to any circumstance RMC from outside of site accordingly to annexure-1 of Technical Bid, the star rate will not admissible to that quantity executed.

Signature of Contractor

**Executive Engineer**  
**Project implementation unit Zone-6,**  
**DAHOD**

૪૦૧, ચોથો માળ, NHM/RDD/PIU Building, NHM ભવન,  
સીવિલ હોસ્પિટલ કેમ્પસ, સેક્ટર-૧૨, ગાંધીનગર, ૩૮૨૦૧૨  
ફોન: ૦૭૯-૨૩૨૩૧૪૩૪, ૨૩૨૩૧૩૯૩,  
ફેક્સ: ૦૯૭-૨૩૨૩૧૯૯૫,  
ઈ-મેઈલ: [piusec10@yahoo.com](mailto:piusec10@yahoo.com)

મુખ્ય ઇજનેર  
પ્રોજેક્ટ ઈમ્પ્લીમેન્ટેશન યુનિટ  
ગાંધીનગર

R.P.A.D.

જા.નં.: પી.આઈ.યુ. / ગુ.નિ. / સૂચનો / ૪૬૫ / ૨૦૨૦-૨૧.

તારીખ: ૧૮/૦૧/૨૦૨૧

22 MAR 2021

પ્રતિ,

કાર્યપાલક ઇજનેરશ્રી, (તમામ)

પ્રોજેક્ટ ઈમ્પ્લીમેન્ટેશન યુનિટ,

વિષય : કામની સાઈટ ઉપર રાખવાની થતી કાળજી બાબત.

પી.આઈ.યુ. (હેલ્થ) હસ્તકનાં કામોનાં ગુણવત્તા નિરીક્ષણની કામગીરી દરમિયાન ધ્યાન પર આવેલ બાબતોનાં અનુસંધાને નીચે દર્શાવેલ બાબતો બુજબ કામનાં દસ્તાવેજોની નિભાવણી કરવા તથા સાઈટ ઉપર કાળજી રાખવા જણાવવામાં આવે છે.

બિડાણ: સૂચનો

22/03/21

મુખ્ય ઇજનેર

પ્રોજેક્ટ ઈમ્પ્લીમેન્ટેશન યુનિટ

ગાંધીનગર

નકલ રવાના:-

૧) પ્રતિ, અધિક્ષક ઇજનેરશ્રી (તમામ) તરફ જાણ સારું.

## મકાનોનાં બાંધકામમાં માર્ગદર્શક સૂચનો

### ✓ દસ્તાવેજી ચકાસણી

- 1) કામની વિગત દર્શાવતું સ્પષ્ટ વિગતવાર માહિતી દર્શાવતું બોર્ડ ટેન્ડરની જોગવાઈ મુજબ ફેમીંગ કરી કામનાં સ્થળે ફિક્સ કરેલ હોવું જોઈએ. બોર્ડનું લોકેશન કામની આગળનાં ભાગમાં સ્પષ્ટ રીતે જોઈ શકાય, વાંચી શકાય તથા સમજી શકાય તેવું હોવું જોઈએ.  
ઘણી વખત કામોનાં નિરીક્ષણ દરમિયાન ફલેક્સ પર લખેલ વિગતો વાળો પડદો સાઈટ ઉપર ચોટાડેલ કે ટીંગાડેલ જોવા મળે છે. જે પ્રથા બરાબર નથી.
- 2) કામોનાં નિરીક્ષણ દરમિયાન કામનો રેકર્ડ યોગ્ય પ્રમાણમાં રખાતો ન હોવાની બાબત ધ્યાન પર આવેલ છે. નિરીક્ષણ દરમિયાન કામનો રેકર્ડ જેવો કે તાંત્રિક મંજૂરીવાળું અંદાજ પત્રક, વર્ક ઓર્ડર, ટેન્ડરની નકલ, SBC રીપોર્ટની ફાઈલ, કામનો લે-આઉટ, આર્કીટેક પ્લાન, વર્કીંગ ડ્રોઈંગ, સ્ટ્રક્ચરલ ડિઝાઈન, મીક્ષ ડિઝાઈન વિ. નો ગુણવત્તા નિયમનનાં નિરીક્ષણ દરમિયાન ઘણી વખત આ રેકર્ડ અધૂરો / અધ કયરો ફાઈલમાં / લૂઝ પેપરમાં જોવા મળે છે. જેની અલગ અલગ વ્યવસ્થિત ફાઈલ કરી રેકર્ડ મેઈન્ટેઈન કરવો જોઈએ.
- 3) કોન્ક્રીટ મીક્ષ ડિઝાઈન જો GERA પ્રયોગશાળામાં ન કરાવેલ હોય અને સરકાર માન્ય ખાનગી પ્રયોગશાળામાં કરાવેલ હોય તો તેને કાર્યપાલક ઈજનેર દ્વારા મંજૂર કરાવી કામગીરી કરવી જોઈએ. ઘણા કિસ્સામાં કાર્યપાલક ઈજનેરશ્રી દ્વારા આવી મીક્ષ ડિઝાઈન મંજૂર કરવામાં આવતી નથી. ખાનગી પ્રયોગશાળામાં મીક્ષ ડિઝાઈન કરાવવા માટે કાર્યપાલક ઈજનેરશ્રી એ અધિક્ષક ઈજનેરશ્રીની પૂર્વ મંજૂરી લેવાની રહેશે અને ટેન્ડર ક્લોઝ મુજબ કામગીરી કરવાની રહેશે.
- 4) કામમાં વાપરવામાં આવતાં માલસામાન જેવા કે, સીમેન્ટ, લોખંડ, રેતી, ઇંટો, વિગેરેનાં પરીક્ષણો માટે આગોતરું આયોજન કરવું જોઈએ જેથી કામ કરતાં પહેલાં પરિણામ ઉપલબ્ધ થાય અને પરિણામ સંતોષકારક હોય તો જ માલસામાન કામગીરીમાં વાપરી શકાય. આઈટમ વાઈઝ માલસામાનનાં પરીક્ષણની ફિક્વન્સી ગેરી તથા સરકાર માન્ય ખાનગી પ્રયોગશાળા કરાવેલ પરીક્ષણોમાં નિયમોનુસાર જાળવવી જોઈએ. પરિણામો વ્યવસ્થિત ફાઈલ કરીને રાખવા જોઈએ. જેથી નિરીક્ષણ સમયે ઉપલબ્ધ થઈ શકે. ઘણી જગ્યાએ અવ્યવસ્થિત રીતે અલગ અલગ જગ્યાએ છૂટા પેપર તરીકે રાખવામાં આવે છે.
- 5) ઈજારદાર તરફથી કામનાં સ્થળે નિયતમાત્રામાં તાંત્રિક કર્મચારીઓ ઉપલબ્ધ હોવા જોઈએ અને તેનો રેકર્ડ પણ વ્યવસ્થિત નિભાવવો જોઈએ જેમ કે સ્થળ ઉપલબ્ધ ઈજારદારનાં તાંત્રિક કર્મચારી તરીકે કોણ કોણ છે જેની લેખીત માહિતી ઈજારદારે નામ, સરનામા, તથા શૈક્ષણિક

લાયકાતની વિગતો નાયબ કાર્યપાલક ઇજનેરશ્રીની કચેરીમાં આપવી જોઈએ. આ કર્મચારી પાસે ઇજારદારનાં આઈકાર્ડ તથા શૈક્ષણિક લાયકાતનાં સર્ટીફિકેટ નિરીક્ષણ સમયે ઉપલબ્ધ કરાવવા જોઈએ.

- 6) કામમાં સીમેન્ટ રજીસ્ટર, સ્ટીલ રજીસ્ટર, ક્યુબ રજીસ્ટર, મટીરીયલ ટેસ્ટીંગ રજીસ્ટર, સ્લામ્પ ટેસ્ટ રજીસ્ટર વિગેરે નિયમોનુસાર નિભાવવા જોઈએ. નિરીક્ષણ દરમિયાન આ રજીસ્ટર અધૂરી વિગતે કે ન નિભાવતા હોવાનું ધ્યાન પર આવેલ છે, રજિસ્ટર પેન્સીલથી ન ભરતાં ઇન્કીંગ કરેલ હોવા જોઈએ તથા તેમાં જરૂરી તમામ કોલમની વિગત ભરેલી હોવી જોઈએ. રજિસ્ટરમાં સેક્શન ઓફિસર, ના.કા.ઈ.શ્રી તથા ઇજારદારનાં પ્રતિનિધીની સહી હોવી જોઈએ અને કા.ઈ.શ્રી એ તેનું રેન્ડમ ચેકીંગ કરવું જોઈએ. સીમેન્ટ, સ્ટીલ રજીસ્ટરમાં આવકમાં જે જથ્થો જમા લીધેલ હોય તેની તમામ વિગત જેવી કે કઈ બ્રાન્ડ, કેટલો જથ્થો, કઈ તારીખે કયાં બીલ નંબરથી જમા લીધેલ હોય તેની તમામ વિગત રીમાર્ક્સનાં કોલમમાં દર્શાવવી જોઈએ તથા સીમેન્ટ કે સ્ટીલ જે આઈટમ હોય તેનાં બીલની નકલ પણ રજિસ્ટર સાથે અથવા ફાઈલમાં રાખવી જોઈએ.
- 7) કામમાં ટેન્ડરની જોગવાઈ સામે કરેલ વધારાનાં જથ્થાની કે એક્સ્ટ્રા આઈટમની કામગીરીની મંજૂરી સહિતની તમામ વિગતો સાઈટ ઉપર ઉપલબ્ધ હોવી જોઈએ અને ગુણવત્તા નિયમન નિરીક્ષણ સમયે તે વિગતો પૂરી પાડવી જોઈએ.
- 8) કામ શરૂ કરતાં ઇજારદાર પાસેથી કામની પ્રગતિ માટે નો વર્કિંગ પ્લાન / સેક્સન પ્લાન મેળવી લેવો જોઈએ અને તે પ્રમાણે કામની પ્રગતિ થાય છે કે કેમ તેનું મોનિટરિંગ ટાઈમ ટુ ટાઈમ કરવું જોઈએ. કામની પ્રગતિ ધીમી હોય તો ટેન્ડર ક્લોઝ મુજબ શું કાર્યવાહી કરી છે; તે તથા લીક્વીડિટી ડેમેજ ટેન્ડર ક્લોઝ મુજબ કાપવામાં આવેલ છે કે કેમ તેની વિગતો પૂરી પાડવી જોઈએ. વ્યાજબી કિસ્સામાં ટાઈમ લીમીટ એક્સ્ટેન્શન માટે કરેલ કામગીરીની વિગતો પૂરી પાડવી જોઈએ.
- 9) આ કામનું નિરીક્ષણ અગાઉ ગુણવત્તા નિયમન તંત્ર કે અન્ય ઉપરી અધિકારીશ્રી જેમ કે મુખ્ય ઇજનેરશ્રી, અધિક્ષક ઇજનેરશ્રી દ્વારા કરવામાં આવેલ છે કે કેમ તેની વિગત તથા તેની નિરીક્ષણ નોંધ બીજા નિરીક્ષણ સમયે પૂરી પાડવી જોઈએ તથા નિરીક્ષણ નોંધમાં દર્શાવેલી રિમાર્ક્સની પૂર્તતા કરી કામની સુધારણા કરેલ છે કે કેમ તે ગુણવત્તા નિયમન નિરીક્ષણ સમયે સાઈટ ઉપર તેની ચકાસણી કરાવવી જોઈએ.
- 10) કામનું બિલ ટેન્ડર ક્લોઝ મુજબ નિયમોનુસાર એજન્સીએ દર મહિને રજૂ કરવાનું હોય છે. એજન્સી બિલ રજૂ કરી તે મુજબની સૂચના આપી એજન્સી પાસેથી બિલ મેળવવું જોઈએ જેની સાથે ચકાસણી કરી અને માપમાં ફેરફાર હોય તો એજન્સી સાથે પરામર્શ કરી તે પ્રમાણે ચકાસણી કરેલ બિલ મુજબ કાર્યવાહી કરવી તથા બિલમાં ઇજારદારશ્રીની સહી લેવી.

- 11) માપપોથીમાં માપો લખવામાં ખૂબ કાળજી રાખવી જોઈએ. જે માપો હંકાઈ જાય તેવા (hidden) આઈટમોનાં માપો જ્યારે માપ લીધા હોય તે તારીખે રેકર્ડ એન્ટ્રી કરવાની તથા તેને ક્લોઝ કરવાની હોય છે. એટલે કે "measured and recorded by me" માપપોથીમાં લખી નામ તથા હોદ્દો ધરાવતાં સ્ટેમ્પ સાથે સહી કરવી. આ હિડન માપોમાં કા.ઈ.શ્રી એ ચેકિંગ કરવું ખાસ આવશ્યક છે. દરેક નવાં માપ લખતી વખતે માપ લીધા તારીખ લખવી જરૂરી છે. કાર્યપાલક ઇજનેરશ્રી એ દરેક કામમાં મુખ્ય આઈટમમાં કામના સપ્રમાણસર ચેકિંગ કરવું આવશ્યક છે હાલમાં માત્ર એક કે બે આઈટમ માં 10% જેટલું ચેકિંગ બતાવવામાં આવે છે, જે પ્રથા બરાબર નથી.

✓ સાઈટ ઉપર ધ્યાનમાં રાખવાના મુદ્દાઓ

- 1) સાઈટને વ્યવસ્થિત સાફ કરી, લે આઉટ મુજબ બાઉન્ડ્રી લાઈન માર્ક કરી મંજૂર થયેલ પ્લાન મુજબ લાઈન આઉટ આપવો જોઈએ. રેફરન્સ પોઇન્ટ તરીકે ટી.બી.એમ. (TBM) ફિક્સ કરી કામગીરી શરૂ કરવી જોઈએ. આજુબાજુની જમીનનાં સાપેક્ષમાં કામની સાઈટ નીચાણમાં હોય તો તેને ધ્યાને લઈ યોગ્ય પ્લીનથ લેવલ નક્કી કરવું જોઈએ, કાર્યપાલક ઇજનેરશ્રીએ જાતે ચકાસણી કરી કામની સાઈટ તથા પ્લીનથ યોગ્ય જે કે કેમ તે નક્કી કરવું જોઈએ.
- 2) પાયાનાં ખોદકામ પછી ફાઉન્ડેશન લેવલ કાર્યપાલક ઇજનેરશ્રી એ જાતે ચેક કરી યોગ્ય છે કે કેમ નક્કી કરવું. ઘણી વખત પાયા ઉપરથી પહોળા અને નીચે જતાં સાંકડા થતા હોય છે. જે યોગ્ય નથી ફાઉન્ડેશનનાં બોટમ લેવલે પાયાનાં ખોદકામની નિયત પહોળાઈ જેટલી હોવી જોઈએ.
- 3) ફાઉન્ડેશનમાં પી.સી.સી. કોન્ક્રીટ પર ફૂટીંગની કામગીરી થાય ત્યારે ચારે બાજુએ નિયત પહોળાઈ વાળા ઓફસેટ હોવા જોઈએ. નિરીક્ષણમાં એક બાજુ વધારે ઓફસેટ અને બીજી બાજુએ બિલકુલ ઓફસેટ ન હોય તેમ જોવા મળતું હોય છે. જે યોગ્ય નથી. મંજૂર થયેલ ડ્રોઈંગ મુજબ જ કામગીરી કરવી જોઈએ.
- 4) કોન્ક્રીટની કામગીરી કરાવતાં પહેલાં જ બિમ, પ્લીનથ બીમ, સ્લેબ વગેરેનાં બોટમ લેવલ / ટોટી લેવલ ચેક કરી લેવા જોઈએ, જેથી કામનું લાઈન લેવલ જળવાઈ રહે. આર.સી.સી. કોલમના કંસ્ટ્રક્શન જોઈન્ટ એકદમ ફ્લશ હોવાં જોઈએ કંસ્ટ્રક્શન જોઈન્ટ પર કી પ્રોવાઈડ કરવી જોઈએ. જેથી કોન્ક્રીટને પ્રોપર બોન્ડ મળી શકે. કોલમમાં દરેક લેવલે ઓળંબાથી વર્ટિકલીટી ચેક કરી લાઈન લેવલ જાળવવા જોઈએ. નિરીક્ષણમાં ઘણી વખત એક ફ્લોરથી બીજા ફ્લોરનાં કોલમની લાઈનમાં ફેરફાર જોવા મળતો હોય છે. જે ચલાવી શકાય નહીં અને તેથી કોલમ તોડાવી ફરીથી ભરવાના પ્રશ્નો ઉપસ્થિત થતાં હોય છે. જેની ખાસ કાળજી રાખવી જોઈએ.



- 5) આર.સી.સી. કામમાં રેઇનફોર્સમેન્ટને ડિઝાઇન ડ્રોઇંગ મુજબનું કવર રાખવું જોઈએ. આર.સી.સી. કોલમમાં ચારેબાજુ નિયત યુનિફોર્મ કવર હોવું જોઈએ. ઘણી વખત એક બાજુ વધારે કવર અને બીજી બાજુ ઓછું કવર જોવા મળે છે. જે યોગ્ય નથી. બીમ અને સ્લેબમાં પૂરતાં કવરનાં અભાવે રેઇનફોર્સમેન્ટ સળિયા ખુલ્લા થયેલ જોવા મળે છે. જે યોગ્ય નથી.
- 6) રેઇનફોર્સમેન્ટમાં સળિયાનો ડાયામીટર તથા તેનું પ્લેસીંગ સ્ટ્રકચરલ ડિઝાઇનમાં દર્શાવ્યા મુજબનું જ હોવું જોઈએ. ઘણી વખત બે સળિયા ખુબ જ નજીક નજીક તથા અન્ય સળિયા તેની દૂર જોવા મળે છે. જે યોગ્ય નથી. ડિસ્ટ્રીબ્યુશન સ્ટીલ રિંગમાં ઘણી વખત હૂક જોવા મળતાં નથી. રિંગનાં સળિયાને 45° નાં ખૂણે વાળી નિયત લંબાઇનાં હૂક પૂરાં પાડવા જોઈએ.
- 7) સેન્ટરીંગ તથા ફોર્મવર્ક સારી ગુણવત્તાવાળું હોવું જોઈએ. બેન્ડ થયેલ પ્લેટ કે જર્જરિત સામાન ન વાપરવો જોઈએ. અન્યથા કામનાં લાઇન લેવલ, હની કોમ્બિંગ, રફ ફિનિશ, બેન્ડિંગ કે સેગીંગ ના પ્રશ્નો ઉપસ્થિત થાય છે.
- 8) કોન્ક્રીટની કામગીરી ચાલુ હોય ત્યારે સમયાન્તરે સ્લંપ ટેસ્ટ કરવા જોઈએ અને ડિઝાઇન મુજબ નો સ્લમ્પ જાળવવો જોઈએ. જેથી કોન્ક્રીટની વર્કબીલીટી પણ જાળવાઈ રહે અને કોન્ક્રીટની મજબૂતાઈ પણ જાળવાય. અન્યથા હની કોમ્બિંગ કે કોન્ક્રીટ નબળા થવાની શક્યતા રહે છે.
- 9) કોન્ક્રીટનું મિશ્રણ થયા બાદ તાત્કાલિક તેનું પ્લેસીંગ થઈ જવું જોઈએ. પડી રહેલ કે ન વપરાયેલ કોન્ક્રીટને તાત્કાલિક દૂર કરી તેને કામમાં વાપરવો જોઈએ નહીં.
- 10) આર.સી.સી. કામમાં કોલમ / બીમ ઉપર કોલમ / બીમ નંબર, કાસ્ટ કર્યા તારીખ, ગ્રેડ ઓફ કોન્ક્રીટ વગેરે દેખી શકાય તેમ ઓઇલ પેઇન્ટથી સુવાચ્ય અક્ષરોમાં લખવામાં આવતું નથી. તો તે બાબતે કાળજી લઇ સૂચનાનો અમલ કરવો.
- 11) બિમ સ્લેબ થી ઉપર કોલમ ભરતા પહેલા સ્ટાર્ટર કાસ્ટ કરવા જોઈએ.
- 12) કોન્ક્રીટ બીમ / કોલમ વગેરેનાં ક્યોરીંગ માટે જ્યાં પાણી ભરી શકાય તેમ ન હોય ત્યાં કંતાનની થેલીઓ ઢાંકીને પાણી છાંટવું. સતત આ સરફેસ ભીની રહે તે ધ્યાન રાખવું.
- 13) કંટ્રોલ કોન્ક્રીટ માટે વે-બેચર નો જ ઉપયોગ કરવો. સ્લમ્પ ટેસ્ટ કરી મિક્સ ડિઝાઇન મુજબ કોન્ક્રીટની કામગીરી કરવી.
- 14) ઘણી વખત ફ્લોરિંગ કામમાં લેવલીંગ માટે રેતીના બેડીંગની કામગીરી કરવામાં આવે છે. જે યોગ્ય નથી. મંજૂર થયેલ સિમેન્ટ મોર્ટારનાં બેડીંગ ઉપર ફ્લોરિંગની કામગીરી થાય તે જોવું.
- 15) સીમેન્ટ સ્ટોરમાં ભેજ ન લાગે તેની ખાસ કાળજી રાખવી. સિમેન્ટનો સ્ટોરેજ દસ-દસ થેલીની હરોળમાં કરવો. કોઈ કારણસર સિમેન્ટનો ગોઠો થઈ જાય તો તે સીમેન્ટ વાપરવો નહીં અને તેને દૂર કરી સિમેન્ટ રજિસ્ટરમાં તે પ્રમાણે નોંધ કરવી.

- 16) ઇંટોનાં ચણતર કામનાં નિરીક્ષણમાં સાંધા ની જાડાઈ વધારે હોય, સાંધા પોલા હોય, સાંધામાં સિમેન્ટ મોર્ટાર સેટ થયેલ ન હોય એટલે મોર્ટાર નબળો હોય સામાન્ય સ્કેચ કરતાં ખરી પડતો હોય. વર્ટિકલ જોઈન્ટ બ્રેક ન થયેલ હોવાનું જોવા મળતું હોય છે. જે યોગ્ય નથી. ચણતર કામ ઇંચીશ બોન્ડમાં હોવું જોઈએ. ચણતર ના સાંધા પૂર્ણ રીતે ભરેલા તથા સિમેન્ટ મોર્ટાર જોગવાઈ મુજબનો હોવો જોઈએ.
- 17) સિમેન્ટ મોર્ટારની કામગીરી માટે નિયત સાઈઝનાં બોક્ષમાં રેતી તથા સિમેન્ટનું પ્રમાણ જાળવી યુનિફોર્મ મિક્ષ કરી મોર્ટાર વાપરવો જોઈએ. મોર્ટાર તૈયાર કર્યા બાદ તુરંત જ વાપરી નાખવો જોઈએ પડી રહેલ કે સેટ થઈ ગયેલ મોર્ટાર વપરાશમાં લઈ શકાય નહીં.
- 18) કામની સાઈટ ઉપર સલામતી સાંથે વિશેષ કાળજી રાખવી. સાઈટ ઉપર દરેકે હેલ્મેટ પહેરીને કામ કરવું. OTS, લીફ્ટ, દાદર વગેરેની જગ્યામાં કોઈ પડી ન જાય તે માટે તેને કવર કરી વ્યવસ્થિત આડસો ઉભી કરવી જોઈએ.
- 19) દરેક કામમાં મંજૂર થયેલ આઈટમ મુજબનાં સેમ્પલ નાયબ કાર્યપાલક ઇજનેરશ્રી / કાર્યપાલક ઇજનેરશ્રીની કચેરીમાં તથા સાઈટ ઉપર રાખવા જોઈએ. આ મુજબની વસ્તુ વપરાય છે. તેની ખાસ ખાત્રી. નાયબ કાર્યપાલક ઇજનેર અને શ્રી કાર્યપાલક ઇજનેરશ્રી એ જાતે કરવાની રહેશે.

  
EXECUTIVE ENGINEER  
QUALITY CONTROL, PIU  
GANDHINAGAR

# વિદ્યુતિકરણના કામ માટે ઇજારદારશ્રી ને અગત્યની સૂચનાઓ

(૧) વિદ્યુતિકરણના કામ સરકારશ્રી દ્વારા નિયત લાઇસન્સ ધરાવતા ઇલેક્ટ્રિશિયન અથવા વાયરમેન દ્વારા કરાવવાના રહેશે. જેટલી રકમનું વીજળીકરણનું કામ હશે તે કિંમતના પ્રમાણમાં માર્ગ અને મકાન (વિદ્યુત) વિભાગમાં યોગ્ય કેટેગરીમાં નોંધાયેલ વિદ્યુત ઇજારદારશ્રીએ કામ કરવાનું રહેશે.

(૨) કામના ઇન્ચાર્જ ઇજનેર દ્વારા વિદ્યુતિકરણના કામ કરતાં ઇલેક્ટ્રિશિયન અને વાયરમેનનું જ્યારે સરકારશ્રી દ્વારા ઇશ્યુ કરેલ લાઇસન્સની માંગણી કરવામાં આવે ત્યારે અસલ માં રજૂ કરવાનું રહેશે.

(૩) જે વિદ્યુત ઇજારદારને કામ આપવામાં આવે ત્યારે ઇજારદારશ્રીએ સિવિલ કામ સાથે વિદ્યુતનું કામ સરકારશ્રી દ્વારા આપેલ નોંધણી ધરાવતા વિદ્યુતની કામગીરી માટેના ઇજારદારની નોંધણીનું પ્રમાણિત લાઇસન્સ ધરાવતા ઇલેક્ટ્રિશિયન અને વાયરમેનનું નામ તેની વિગતો વર્કઓર્ડર આપતા પહેલાં અત્રેની કચેરીએ રજૂ કરવાનું રહેશે. જેથી વિદ્યુતિકરણની કામગીરી દરમિયાન ક્ષતિયુક્ત કામગીરીથી કોઈ જીવલેણ અકસ્માતનો પ્રશ્ન ઉપસ્થિત થાય તો આ કચેરી દ્વારા નિયમ અનુસાર કાયદાકીય પગલાં લેવામાં સરળતા રહે.


(૪) વિદ્યુતિકરણના કામોમાં વપરાશમાં લેવાના થતાં માલસામાન, સાધનો, ઇક્વિપમેન્ટ્સ સરકારશ્રીના વિદ્યુત વિભાગ દ્વારા/ પી.આઈ.યુ. દ્વારા મંજૂર કરેલ પ્રમાણિત કેટેગરીના જ રહેશે.

(૫) વિદ્યુતિકરણના કામમાં વપરાશમાં લીધેલ માલસામાન અને ઇક્વિપમેન્ટ્સ નિયત માપદંડ વગરના તેમજ તાંત્રિક ગુણવત્તા ન ધરાવતા ધ્યાને આવતા તરતજ સૂચના અનુસાર બદલવાના રહેશે અને ત્યારબાદ તે કામનું નિયત ચુકવણું કચેરી દ્વારા ઇજારદારશ્રીને બિલમાં કરવામાં આવશે.

(૬) વિદ્યુતિકરણના (LT/HT) કરેલ કામના જે તે ટેસ્ટિંગ રિપોર્ટ નિયમાનુસાર જે તે વિદ્યુત સપ્લાય કંપની પાસેથી મેળવી આપવાની કામગીરી ઇજારદારશ્રીએ સ્વખર્ચે કરવાની રહેશે અને તે અંગે અત્રેની કચેરી દ્વારા આવી કોઈપણ પ્રકારની અલગથી ફીની ચુકવણી કરવામાં આવશે નહિ.

(૭) નવા વિદ્યુત જોડાણ (LT/HT) માટે અથવા વીજ લાઇન શિફ્ટિંગ, પોલ શિફ્ટિંગ કે ટ્રાન્સફોર્મર શિફ્ટિંગ કે અન્ય કોઈપણ વિદ્યુતને/વીજ કંપનીને લગતી કામગીરી માટે લાઇસન્સિંગ વર્ક ઇજારદારશ્રીને કરવાનું રહેશે અને સંબંધિત વિજસપ્લાય કંપનીને ચૂકવવાની થતી નિયમાનુસારની રકમ પ્રથમ ઇજારદારશ્રીને ચૂકવવાની રહેશે. ત્યારબાદ ચૂકવેલ રકમના બિલ અને વાઉચર અત્રેની કચેરીમાં રજૂ કરતાં તે રકમ ઇજારદારશ્રીને પરત કરવામાં આવશે.

(૮) વિદ્યુતિકરણના (LT/HT) કામોમાં જનરેટર, ટ્રાન્સફોર્મર, લિફ્ટ, ફાયર સેફ્ટી કે અન્ય વિદ્યુતના ઇક્વિપમેન્ટ્સને કાર્યરત કરવા માટે ઇલેક્ટ્રિકલ ઇન્સ્પેક્ટર, ફાયર ઓફિસર કે અન્ય ડિપાર્ટમેન્ટ દ્વારા પ્લાનની મંજૂરી, NOC કે જરૂરી સર્ટિફિકેટ્સ મેળવવાની સંપૂર્ણ જવાબદારી ઇજારદારશ્રીની પોતાની રહેશે. જે અંગેનો સંપૂર્ણ ખર્ચ ઇજારદારશ્રીએ કરવાનો રહેશે અને તે માટે ના કોઈપણ પ્રકારના નાણાં/ફી નું ચુકવણું અત્રેથી કરવામાં આવશે નહિ.



નાયબ કાર્યપાલક ઇજનેર(વિદ્યુત)

પી.આઈ.યુ પંચમહાલ



કાર્યપાલક ઇજનેર(વિદ્યુત)

પી.આઈ.યુ જોને-૬ વડોદરા

## **IMPORTANT INSTRUCTION TO BIDDERS**

- Demand Draft for Tender Fee & EMD in approved form & with Validity of minimum 180 days from the last date of online submission of tender shall be submitted to the **office of the Superintending Engineer, Project Implementation Unit, Zone-6, GMERS, Medical Hospital and College Campus, Near College Dom,Gotri, Vadodara-390021** only & not to Chief Engineer, P.I.U., Gandhinagar. ( **The documents submitted to Gandhinagar office will not be consider strictly**)
- Documents like Valid registration certificate in proper class & category, Valid Bank Solvency Certificate for current calendar year(as per rules of registration) shall be submitted online & physical copy of above documents shall be submitted along with Tender Fee & EMD to the office of the Superintending Engineer, Project Implementation Unit, Zone-6, Vadodara within stipulated time.
- **Documents as above only shall be submitted to Superintending Engineer, P.I.U., Zone-6, Vadodara in a separate sealed cover duly super scribed with name of work, Tender notice number & serial number, Tender ID of work as per tender notice.**
- No extra documents may please be submitted, except as listed above.

બાંધકામના કોન્ટ્રાક્ટર પાસેથી સીક્યુરીટી ડીપોઝીટ સ્વીકારવાની પ્રથામાં અંશતઃ ફેરફાર કરવા બાબત.

ગુજરાત સરકાર

માર્ગ અને મકાન વિભાગ,

ઠરાવ ક્રમાંક :- ટીએનસી -૧૦-૨૦૧૩-૩-(ભાગ-૨) - સી

તા. ૨૦-૧૧-૨૦૧૩

વંચાણે લીધો ઠરાવ ક્રમાંક :- ટીએનસી -૧૦૮૮/આઈબી/૧૮/(૧૩)- સી તા. ૩૧/૮/૧૯૯૪

**આમુખ :-**

કોન્ટ્રાક્ટરોને આપવામાં આવતા કામોમાં સીક્યુરીટી ડીપોઝીટ અંગેની હાલની પદ્ધતિ પ્રમાણે એગ્રીમેન્ટ સમયે ૫% પરફોર્મન્સ બોન્ડ બેંક ગેરંટી સ્વરૂપે, ૨.૫% સીક્યુરીટી ડીપોઝીટ નર્મદા બોન્ડ અથવા એન.એસ.એસ. સ્વરૂપે લેવામાં આવે છે તેમજ ૨.૫% રકમ ઈજારદારશ્રીના રનીંગ બીલમાંથી કપાત સ્વરૂપે વસુલ કરવામાં આવે છે. કોન્ટ્રાક્ટર્સ એસોસિએશન દ્વારા નાણાંકીય તરલતા રહે તે માટે ૨.૫% લેખે કાપવામાં આવતી સીક્યુરીટી ડીપોઝીટની રકમ બેંક ગેરંટી સામે છુટી કરવાની રજુઆત કરવામાં આવેલ હતી. જે બાબત વિચારણા હેઠળ હતી.

**ઠરાવ :-**

પુખ્ત વિચારણાને અંતે સરકારી કામોના કોન્ટ્રાક્ટર માટે સીક્યુરીટી ડીપોઝીટ સ્વીકારવાની હાલની પ્રથામાં નીચે મુજબનો ફેરફાર કરવામાં આવે છે.

૧. હાલમાં પ્રથમ તબક્કે લેવામાં આવતી ૨.૫% સીક્યુરીટીની રકમ જે નર્મદા બોન્ડ / એન.એસ.એસ. સ્વરૂપે લેવાની જોગવાઈ છે તે હવે નર્મદા બોન્ડ/એન.એસ.એસ. તેમ જ શીડ્યુલ્ડ બેંકની એફ.ડી.આર. સ્વરૂપે પણ લઈ શકાશે.
૨. રનીંગ બીલમાંથી કપાત થતી ૨.૫% સીક્યુરીટી ડીપોઝીટની રકમ ઈજારદારશ્રી દ્વારા શીડ્યુલ્ડ બેંકની બેંક ગેરંટી રજુ કર્યેથી નીચે જણાવ્યા મુજબ રીલીઝ કરવાની રહેશે.

ક્રમ	નાણાકીય પ્રગતિ	રનીંગ બીલમાંથી ૨.૫% લેખે સીક્યુરીટી ડીપોઝીટ પેટે કાપવામાં આવેલ રકમમાંથી છુટી કરવાપાત્ર રકમ	બેંક ગેરંટીની રકમ
૧	ટેન્ડરની રકમના ૨૫%	રનીંગ બીલમાંથી કાપવામાં આવેલ રકમ અથવા કામની અંદાજીત કિંમતના ૦.૬૨૫% બેમાંથી જે ઓછી રકમ હોય તે	રીલીઝ કરવામાં આવેલ રકમ જેટલી
૨	ટેન્ડરની રકમના ૫૦%	રનીંગ બીલમાંથી કાપવામાં આવેલ રકમ અથવા કામની અંદાજીત કિંમતના ૧.૨૫% બેમાંથી જે ઓછી રકમ હોય તે	રીલીઝ કરવામાં આવેલ રકમ જેટલી
૩	ટેન્ડરની રકમના ૭૫%	રનીંગ બીલમાંથી કાપવામાં આવેલ રકમ અથવા કામની અંદાજીત કિંમતના ૧.૮૮% બેમાંથી જે ઓછી રકમ હોય તે	રીલીઝ કરવામાં આવેલ રકમ જેટલી

ઉપરોક્ત બેંક ગેરંટીની મુદત કામ પુર્ણ થવાની ખરેખર તારીખથી છ (૬) માસ વધુ સમયની લેવાની રહેશે તથા ઈજારદારશ્રી પાસેથી બાંહેધરીપત્ર મેળવવાનો રહેશે કે, જો કામ પુર્ણ કરવાની સમયમર્યાદામાં વધારો થશે તો વધારેલ સમયમર્યાદાની તારીખથી ૬ માસ વધુ સમયમર્યાદા વાળી બેંક ગેરંટી તેઓશ્રી દ્વારા પુરી પાડવામાં આવશે.

કામ પુર્ણ થાય ત્યાં સુધી ઈજારદારશ્રી પાસેથી લેવાની થતી ૧૦% સીક્યુરીટી ડીપોઝીટનું પ્રમાણ કોઈપણ સ્વરૂપે જળવાઈ રહે તેની અચૂક કાળજી રાખવાની રહેશે.

આ ઠરાવ વિભાગની સરખા ક્રમાંકની ફાઈલ પરની નોંધ પર નાણાં વિભાગની તા. ૪-૧૦-૧૩ના રોજથી મળેલ સંમતિથી બહાર પાડવામાં આવે છે.

ગુજરાતના રાજ્યપાલશ્રીના હુકમથી અને તેમના નામે.

(આર. કે. ચૌહાણ)

ખાસ ફરજ પરના અધિકારી (વિ.યો.)

માર્ગ અને મકાન વિભાગ.

પરફોર્મન્સ બોન્ડ તથા જામીન અનામત પેટે  
બેંક ગેરન્ટી મેળવવા બાબત.

ગુજરાત સરકાર  
માર્ગ અને મકાન વિભાગ,  
પરિપત્ર ક્રમાંક :- ટીએનસી - ૧૦-૨૦૧૩-૩-(ભાગ-૧) - સી  
તા. ૧૮-૧૧-૨૦૧૩

વંચાણે લીધો પરિપત્ર ક્રમાંક :- ટીએનસી - ૧૦૮૧/આઈબી/(૧૦)/(૧૧) - સ તા. ૩૧/૩/૧૯૯૯

**આમુખ :-**

વંચાણે લીધેલ પરિપત્ર મુજબ હાલમાં ૧૫ લાખ કે તેથી વધુ રકમના કામોમાં ઈજારદારશ્રી પાસેથી પરફોર્મન્સ બોન્ડ લેવાની જોગવાઈ છે. પરંતુ હવે મોટા ભાગના કામો ૧૫ લાખથી વધુ રકમના હોય છે અને ચાલુ મરામતના કામો પણ હવે ૧૫ લાખથી વધુ રકમના હોય છે. આ બાબતે કોન્ટ્રાક્ટર્સ એસોસિએશન તરફથી પણ પરફોર્મન્સ બોન્ડ માટે કામની રકમની મર્યાદા વધારવા માટેની રજુઆત કરવામાં આવેલ છે. આથી વહીવટી સરળતા અને અનુકુળતા જળવાય તે હેતુસર પરફોર્મન્સ બોન્ડ માટે કામની રકમમાં ફેરફાર કરવાનું સરકારશ્રીની વિચારણા હેઠળ હતું.

**પરિપત્ર :-**

પુખ્ત વિચારણાને અંતે નક્કી થયેલ છે કે હવે રૂ. ૧૫ લાખ કે તેથી વધુ રકમને બદલે રૂ. ૩૦ લાખ કે તેથી વધુ રકમના સરકારી કામોમાં ઈજારદારશ્રી પાસેથી પરફોર્મન્સ બોન્ડ લેવાના રહેશે.

આ પરિપત્ર વિભાગની સરખા ક્રમાંકની ફાઈલ પરની નોંધ પર નાણાં વિભાગની તા. ૨૨-૮-૧૩ના રોજથી મળેલ સંમતિથી બહાર પાડવામાં આવે છે.

ગુજરાતના રાજ્યપાલશ્રીના હુકમથી અને તેમના નામે.

(આર. કે. ચૌહાણ)  
ખાસ ફરજ પરના અધિકારી (વિ.યો.)  
માર્ગ અને મકાન વિભાગ.



કામના ટેન્ડર ફરીથી માંગવામાં આવે  
ત્યારે રાખવાની થતી તકેદારી

ગુજરાત સરકાર

સૂચના ક્રમાંક:-TNC-10-2015-01-C

માર્ગ અને મકાન વિભાગ

સચિવાલય,ગાંધીનગર

તા.૨૫/૦૮/૨૦૧૫

સંદર્ભ:-ગુજરાત તકેદારી આયોગના તા.:૨૩/૦૮/૨૦૧૦ ના પત્ર ક્રમાંક જીએમબી-૧૧૨૦૦૭-૨૫૧૧૫૩-ઈ

આમુખ:-

ગુજરાત તકેદારી અયોગના ધ્યાને આવેલ કિસ્સા મુજબ,પહેલા ઇજારદાર પોતાની ક્ષમતા બહારના નીચા ભાવો ભરે અને ત્યાર પછી ઇજારદારે ટેન્ડરમાં બિનપોષણક્ષમ ભાવો ભર્યા હોવાથી,કામ નહીં કરી શકે તેવા કારણોસર ટેન્ડર રદ કરાયેલ હોય અથવા વેલીડીટી પીરીયડ માં ટેન્ડર સ્વીકારેલ હોયઅને પૂરતી તક મળ્યા છતાં ઇજારદારશ્રી સીક્વરીટી ડીપોઝીટ ન ભરે,એટલે કે પીછે હઠ કરે ત્યારે અને વ્યાજબી કારણો વગર ઇજારદારશ્રી ચાલુકામ અધુરા છોડે અને કરાર રદ થાય તો આવા સંજોગો માત્ર ઇજારદારશ્રીના કારણોસર ઉદભવ્યા ગણાય.આ સ્થિતિમાં કામનાં ટેન્ડર ફરીથી માંગવામાં આવે ત્યારે રદ કરાયેલ ટેન્ડર/કરારના સંબંધિત ઇજારદારશ્રી પુનઃ ટેન્ડર ભરી શકે છે,જે ભુલ કરનાર ટેન્ડર ભરનારની તરફદારી કરવા સમાન હોઇ ઇચ્છનીય નથી.

ઉપરોક્ત બાબત અંગે પુખ્ત વિચારણાને અંતે નીચે મુજબની આથી સૂચના આપવામાં આવે છે.અને આ સૂચનાનું ચુસ્તપણે પાલન કરવા સર્વે સંબંધિતોને આથી જણાવવામાં આવે છે.

સૂચના:-

1. પ્રથમ માંગેલ ટેન્ડરમાં ઇજારદારશ્રી પોતાની ક્ષમતા બહારના નીચા ભાવો ભરે અને ઇજારદારશ્રી પાસેથી આ ભાવોનું પુથ્થકરણ માંગવામાં આવે અને જો ઇજારદારશ્રી તે જણાવેલ સમયમર્યાદામાં ન આપે અને તે ટેન્ડર બિનપોષણક્ષમ ભાવ ગણી રદ કરી ફરીથી માંગવામાં આવે તે સંજોગોમાં.
2. પ્રથમ માંગેલ ટેન્ડર તેની વેલીડીટી પીરીયડમાં સ્વીકારવામાં આવેલ હોય અને પૂરતી તક આપવા છતાં ઇજારદારશ્રી સીક્વરીટી ડીપોઝીટ ન ભરે અને કામમાંથી પીછેહઠ કરે તે સંજોગોમાં.
3. વ્યાજબી કારણો વગર ઇજારદારશ્રી ચાલુ કામ અધુરું છોડે અને કરાર રદ થાય તે સંજોગોમાં.
- 4.

(આર.કે.ચૌહાણ)

ખાસ ફરજ પરના અધિકારી(વિ.ચો)

માર્ગ અને મકાન વિભાગ

રસ્તા અને પુલોના કામોમાં ઈજારદારના ઈજનેરની હાજરી, માલસામાનનો સ્ત્રોત, રોયલ્ટીની ચકાસણી, વેટમીક્ષ મેકાડમની કામગીરીમાં વિશેષ કાળજી, ટામર કામમાં સ્ટાર રેટનું ચુકવણું બાબત

ગુજરાત સરકાર  
માર્ગ અને મકાન વિભાગ,  
પરિપત્ર ક્રમાંક :- પરચ/ ૧૦/૨૦૧૫/૫૫/સી  
સચિવાલય, ગાંધીનગર  
તા. ૦૪/૧૧/૨૦૧૫

**પ્રસ્તાવના:-**

માર્ગ અને મકાન વિભાગમાં રસ્તા અને પુલોના કામો ટેન્ડરથી કરવામાં આવે છે. તેમાં ટામર કામવાળા કામોમાં સ્ટારરેટનું ચુકવણું તથા વેટમીક્ષ મેકાડમની આઈટમ હોય તેવા કામોમાં વિશેષ કાળજી લેવાની બાબત તથા બી-૨ કરારના કલોઝ -૧૭ મુજબ સાઈટ ઉપર ઈજારદારનાં ઈજનેરની હાજરી બાબત તેમજ રસ્તા પુલોના કામો માટે કવોરી આધારિત માલસામાનનો સ્ત્રોત મંજૂર કરી તેની રોયલ્ટીની ચકાસણી બાબત વિચારણા હેઠળ હતી.

**પરિપત્ર:-**

પ્રસ્તાવનામાં જણાવેલ બાબતોએ પુખ્ત વિચારણાને અંતે નીચે મુજબની વધારાની શરતો ટેન્ડરમાં સમાવેશ કરવાનો રહેશે.

૧. ટામરકામ વાળાં કામો માટે હવેથી સ્ટારરેટ નો તફાવત ચુકવતા પહેલા ટામર જે રીફાઇનરીમાંથી ખરીદવામાં આવેલ હોય,ત્યાં ઇજારદાર દ્વારા રજૂ કરવામાં આવેલા ટામરના ગેટ પાસની જે તે રીફાઇનરી દ્વારા જ ગેટ પાસ ઇસ્યુ કરવામાં આવેલ છે,તે ખરાઇ રીફાઇનરી પાસેથી કર્યા બાદ જ સ્ટાર રેટનો તફાવત ચુકવવામાં આવશે.જે કામોમાં આયાતી(ઇમ્પોર્ટેડ) ટામર વાપરવામાં આવેલ હોય તેવા કિસ્સામાં જે બંદર પર ટામર આયાત કરવામાં આવેલ હોય તે ઓથોરાઇઝડ ઇમ્પોર્ટરના તમામ સાદક્ષિક કાગળો ચકાસી,ઓથોરાઇઝડ ડીલર દ્વારા ઇમ્પોર્ટર પાસેથી ખરીદ કર્યાની વિગતો ચકાસણી કર્યા બાદ જ સ્ટાર રેટ નો તફાવત ચુકવવામાં આવશે.

૨.જે કામોમાં વેટમીક્ષ મેકાડમની આઈટમ સ્પેસીફિકેશન પ્રમાણે પ્લાન્ટમાં મીક્ષીંગ કરી કરવાની હોય છે, તેમાં હવેથી પ્લાન્ટમાંથી જે મટીરીયલ સાઇટ ઉપર મોકલવામાં આવે તેને ટામરનાં હોટમીક્ષ પ્લાન્ટ માટેનાં કામોમાં જે રીતે ગેટ પાસમાં નોંધ થાય છે તે મુજબનું ગાડીનું ખાલી અને BHERRRRવજન,વાહન નિકળવાનો સમય વગેરે લખીને મોકલવાનું રહેશે.કામનું ચૂકવણું કામના સ્પેસીફિકેશન ને ધ્યાન રાખીને ગેટ પાસ આધારીત ન કરતા વોલ્યુમેટ્રીક પધ્ધિતથી કોમ્પેક્ટેડ ડેન્સીટી ને ધ્યાને રાખીને નિયત ધારાધોરણ મુજબનાં ડેન્સીટી ટેસ્ટ લઇ થીકનેસ ચકાસી તે મુજબ કરવામાં આવશે.જો ઇજારદાર દ્વારા વેટ મીક્ષ મેકાડમ નું મીક્ષીંગ સાઇટ કરવામાં આવશે તો તેનું ચૂકવણું કરવામાં આવશે નહીં. અને કરારના ભંગ બદલ તેઓ સામે પગલા લેવાના રહેશે.

VGVGV૩.રસ્તા/પુલોનાં કામોમાં મેટલ,કપચી,ગ્રીટ,રેતી વિગેરેનાં વપરાશ માટે સબંધિત કાર્યપાલક ઇજનેરશ્રી દ્વારા આ મટીરીયલ માટેનાં સ્ત્રોત મંજૂર કરવાની જોગવાઈ છે.દરેક કામમાં વપરાતા મેટલ,કપચી,ગ્રીટ,માટી રેતી વગેરે સ્ત્રોત કામની શરૂઆતમાં મંજૂર કર્યા અંગેનો હુકમ કાઇશ્રી દ્વારા કરવાનો રહેશે તથા કામના ચૂકવણા કરતા પહેલા કામમાં વાપરવામાં આવેલ મટીરીયલ મંજૂર કરેલ સ્ત્રોતમાંથી જ લેવામાં આવેલ છેતેની ખરાઇ જે તે મટીરીયલ રોયલ્ટી પાસ આધારીત બીલનું ચૂકવણું કરવામાં આવશે.

૪. બી-૨ કરારનાં કલોઝ-૧૮ માં રૂ.૧.૦૦ કરોડ થી વધુ રકમનું કામો માટે સાઇટ ઉપર ઇજારદારનાં ઇજનેરની હાજરીફરજીયાત છે.તેમજ આ કલોઝમાં ઇજારદારનાં ઇજનેર નોટીસ આપવા છતાં પણ સાઇટ ઉપર હાજર ન રહેતા હોય,તો ઇજારદારનું રજીસ્ટ્રેશન રદ કરવાની પણ કલોઝમાં જોગવાઈ છે.કરારનાં આ કલોઝનું ચુસ્તપણે પાલન થાય તથા દરેક કામ મટે ઇજારદારે રાખેલ ઇજનેરનું નામ અને અન્ય વિગતો તથા અન્ય કામ ઉપર તેઓની નિમણૂક નથી તેવું નોટરાઈઝડ સર્ટીફિકેટ સાથે વર્ક મોનીટરીંગ સીસ્ટમમાં અદ્યતન રાખવાની રહેશે.

૫. રસ્તાના કામમાં આયાતી ડામરનો ઉપયોગ કરવાની ઓઅરવાનગી પ્રથમ વિભાગનાં તા.૦૨/૦૯/૨૦૦૮ ના પરિપત્ર ક્રમાંક:એસટીઆર/૧૦૨૦૦૬/૧૫૭૭/૮/હ થી અપવામા૬ આવેલ છે. અને ત્યારબાદ આ પરિપત્ર સંદર્ભે તા. ૦૮/૧૨/૨૦૦૮ નો સુધારેલ પરિપત્ર ક્રમાંક: એસટીઆર/ ૧૦૨૦૦૬/ ૧૫૭૭/૮/હ થી આપવામાં આવેલ છે. વિભાગ દ્વારા હવે પેનીટ્રેશન ગ્રેડ ના સ્થાને વિસ્કોસીટી ગ્રેડ ડામર વાપરવાની જોગવાઈ ટે ન્ડરમાં કરવામાં આવે છે.જેથી વપરાશમાં લેવામાં આવતા ડામર અંગે વિભાગના તા.૦૮/૧૨/૨૦૦૮ના પરિપત્રમાં જણાવ્યા મુજબની શરતોનું ચુસ્તપણે પાલન થાય અને જે આયાતી ડામરનો વપરાશ કરવામાં આવે છે.તે સ્પેસીફિકેશન મુજબનો વિસ્કોસીટી ગ્રેડના ધારાધોરણને અનુરૂપ છે કે નહીં તેની ચકાસણી કરીને જ તેને ડામર વપરાશ કરવાનો રહેશે. વધુમાં એવા બનાવો કે જે કામોમાં આયાતી ડામર વાપરવા માટે લાવવામાં આવેલ હોય અને તે પરીક્ષણોમાં વિસ્કોસીટી ગ્રેડ નહીં પરંતુ પેનીટ્રેશન ગ્રેડ મુજબ જણાય તેવા કિસ્સામાં તે રીજેક્ટ કરી આવા ડામરના સપ્લાયરની સામે પગલા લેવાની ભલામણ સહ તે બાબતની જાણ અત્રે કરવાની રહેશે.

ગુજરાત રાજ્યના રાજ્યપાલશ્રીના હુકમથી અને તેમના નામે

(એ.એન.મિસ્ત્રી)  
ઉપસચિવ (રા.ર.)  
માર્ગ અને મકાન વિભાગ

પ્રતિ

- (૧) સર્વે અધિક્ષક ઇજનેરશ્રીઓ, (મા. અને મ.) વર્તુળો/ આલેબન/ પાટનગર યોજના/ એક્સપ્રેસ વે વર્તુળ સહિત
- (૨) સર્વે અધિક્ષક ઇજનેરશ્રીઓ, પંચાયત (મા. મ.) વર્તુળો
- (૩) નિયામકશ્રી, ગુજરાત ઇજનેરી સંશોધન સંસ્થા, વડોદરા
- (૪) સર્વે કાર્યપાલક ઇજનેરશ્રી, મા.મ. વિભાગ

માર્ગ અને મકાન વિભાગના કામોમાં ડીફેક્ટ  
લાયેબીલીટી પીરીયડમાં ફેરફાર કરવા બાબત.

ગુજરાત સરકાર  
માર્ગ અને મકાન વિભાગ,  
ઠરાવ ક્રમાંક :- ટીએનસી /૧૦ /૨૦૧૬/કલોઝ-૧૭ એ/ સુધારો/(૧) / સ  
સરદાર ભવન, બ્લોક નં. ૧૪  
સચિવાલય, ગાંધીનગર  
તા. ૧૨/૫/૨૦૧૬

સંદર્ભ :- માર્ગ અને મકાન વિભાગના કામો માટે નિયત કરેલ ટેન્ડર ફોર્મ બી-૧ અનુ બી-૨ ના કલોઝ-૧૭ એ  
માંની જોગવાઈ

**આમુખ :-**

ગુજરાત સરકાર માર્ગ અને મકાન વિભાગ દ્વારા હાથ ધરવામાં આવતા કામો માટે નિયત કરેલ ટેન્ડર ફોર્મ  
બી-૧ અને બી-૨ નો ઉપયોગ કરવામાં આવે છે. આ કામોમાં ડીફેક્ટ લાયેબીલીટી પીરીયડ માટે નિયત કરેલ  
ટેન્ડર ફોર્મ બી-૧ અને બી-૨ ના કલોઝ-૧૭ એ મુજબની કાર્યવાહી કરવામાં આવે છે. આ ડીફેક્ટ લાયેબીલીટી  
પીરીયડની જોગવાઈઓમાં ફેરફાર કરવાની બાબત સરકારશ્રીની સક્રિય વિચારણા હેઠળ હતી.

**ઠરાવ:-**

ઉપરોક્ત બાબતે પુખ્ત વિચારણાના અંતે માર્ગ અને મકાન વિભાગના કામો માટે નિયત કરેલ ટેન્ડર ફોર્મ  
બી-૧ અને બી-૨ માંના ડીફેક્ટ લાયેબીલીટી પીરીયડ અંગેના કલોઝ-૧૭ એ માંની જોગવાઈઓમાં નીચે  
મુજબનો ફેરફાર કરવામાં આવે છે.

Clause	Existing Provision	Modified Provision
17 A (b)	For all works costing more than Rs. 50000/- and up to Rs. 1 crore (amount put to tender), period shall be <b>6 months</b> from the certified date of completion or one monsoon, whichever is later	For all works costing more than Rs. 50000/- and up to Rs. 1 crore (amount put to tender), period shall be <b>12 months</b> from the certified date of completion or one monsoon, whichever is later
17 A (c)	For major projects costing more than Rs. 1 crore, period shall be <b>12 months</b> from the certified date of completion which should include one monsoon	For major projects costing more than <b>Rs. 1 crore, (amount put to tender)</b> period shall be <b>36 months (thirty six)</b> from the certified date of completion or three monsoons whichever is later.

ઉપરોક્ત ઠરાવ સરખા ક્રમાંકની ફાઈલ પરની નોંધમાં માનનીય મંત્રીશ્રી (મા.મ.) ની તા. ૧૦/૦૫/૨૦૧૬  
ના રોજ મંજૂરી મેળવી બહાર પાડવામાં આવેલ છે. આ ઠરાવના ઈસ્યુ તારીખથી ઉપરોક્ત સુધારેલ જોગવાઈઓનો  
ચુસ્તપણે અમલ કરવાનો રહેશે.

ગુજરાતના રાજ્યપાલશ્રીના હુકમથી અને તેમના નામે.

(આર. કે. ચૌહાણ)  
ખાસ ફરજ પરના અધિકારી (વિ.યો.)  
માર્ગ અને મકાન વિભાગ  
ગાંધીનગર

ગુજરાત સરકાર  
માર્ગ અને મકાન વિભાગ,  
પરિપત્ર ક્રમાંક :- ટીએનસી - ૧૦-૨૦૧૬ ૮૧બઢપઠક્ષક્ષણ- ૦૨- સી  
સચિવાલય, ગાંધીનગર  
તા. ૦૩-૦૮-૨૦૧૬

વંચાણે લીધા:- (૧) ઠરાવ ક્રમાંક :- આરજીએન-૬૦૮૮-૮-પાર્ટ-૧-સી તા. ૨૭-૦૧-૧૯૮૮  
(૨) ઠરાવ ક્રમાંક :- આરજીએન-૬૦૮૮-૮-પાર્ટ-૧-સી તા. ૦૬-૦૮-૨૦૧૧

**પરિપત્ર :-**

કેટલીક મા.મ. વિભાગીય કચેરીઓ દ્વારા કોન્ટ્રાક્ટર તરફથી રજીસ્ટ્રેશન રીન્યુઅલ/ કેટેગરી રીન્યુઅલની અરજી કરવામાં આવેલ હોય પણ તેમનું રજીસ્ટ્રેશન રીન્યુઅલ/ કેટેગરી રજીસ્ટ્રેશન જે તે ટેન્ડર ખોલવાની તારીખે ન મળેલ હોય/ આપવામાં આવેલ ન હોય તેમ છતાં તેમના ટેન્ડર ખોલવામાં આવેલ હતાં. પરિણામે આ ટેન્ડર ફરીવાર મંગાવવાના થાય છે તેમજ તેના કારણે કામના અમલીકરણમાં વિલંબ થાય છે. આથી હવે આ બાબતે નીચે મુજબની કાર્યપદ્ધતિ ચુસ્તપણે અમલમાં મુકવાની રહેશે.

કાર્યપાલક ઈજનેરશ્રી/ અધિક્ષક ઈજનેરશ્રી દ્વારા ટેન્ડર ખોલવાની તારીખે જે ઈજારદારો જે તે ટેન્ડર માટે પાત્રતા પ્રમાણેની કક્ષામાં રજીસ્ટ્રેશન ધરાવતા હોય તેમજ જે તે ટેન્ડર માટેની જરૂરી કેટેગરી/ સ્પેશીયલ કેટેગરીમાં પણ રજીસ્ટ્રેશન ધરાવતા હોય, આમ આ બન્ને શરતો પુર્ણ કરતા હોય તેવા ઈજારદારોના જ ટેન્ડર ખોલવાના રહેશે.

ટેન્ડર ખોલવાની તારીખે જે ઈજારદારની રજીસ્ટ્રેશન રીન્યુઅલ / કેટેગરી રજીસ્ટ્રેશનની પ્રક્રિયા પુર્ણ થયેલ ન હોય, તેમના ટેન્ડર ખોલવાના રહેશે નહીં. તેમ છતાં આ પ્રકારના પાત્રતા ન ધરાવતા ઈજારદારોના ટેન્ડર ખોલવામાં આવશે તો સંબંધિતોની જવાબદારી નક્કી કરવામાં આવશે તેની ગંભીરતાથી નોંધ લેવી.

આ પરિપત્ર ગુજરાત રાજ્ય બહાર રજીસ્ટર્ડ થયેલ કોન્ટ્રાક્ટર દ્વારા જો ગુજરાતમાં વિભાગના કામોના ટેન્ડર ભરેલ હોય, તેવા કિસ્સામાં લાગુ પડશે નહીં.

(એ. એન. મિસ્ત્રી)  
ઉપ સચિવ (રા.ર.)  
માર્ગ અને મકાન.

**નકલ રવાના :-**

- (૧) મા. નાયબ મુખ્ય મંત્રીશ્રી અને મંત્રીશ્રી(મા.મ.) વિભાગના અંગત સચિવશ્રીની જાણ સારૂ.
- (૨) મા. રા.ક. મંત્રીશ્રીના અંગત સચિવશ્રીની જાણ સારૂ.
- (૩) મુ.ઈ.શ્રી (મા.મ.) અને અ.સ.શ્રી, મા. મ. વિભાગ, સચિવાલય, ગાંધીનગર.
- (૪) મુ.ઈ.શ્રી (પંચા.) અને અ.સ.શ્રી, મા.મ. વિભાગ, સચિવાલય, ગાંધીનગર.
- (૫) મુ.ઈ.શ્રી (ને.હા.) અને અ.સ.શ્રી, મા.મ. વિભાગ, સચિવાલય, ગાંધીનગર.
- (૬) મુ.ઈ.શ્રી (પા.યો.) અને અ.સ.શ્રી, મા.મ. વિભાગ, સચિવાલય, ગાંધીનગર.
- (૭) મુ.ઈ.શ્રી (ગુ.નિ.) અને અ.સ.શ્રી, મા.મ. વિભાગ, સચિવાલય, ગાંધીનગર.
- (૮) નિયામકશ્રી (એસટીસી) સ્ટાફ ટ્રેનીંગ કોલેજ, ગાંધીનગર.
- (૯) મુ.ઈ.શ્રી (પીએનપી) મા.મ. વિભાગ, સચિવાલય, ગાંધીનગર.
- (૧૦) નાણાંકીય સલાહકારશ્રી (મા.મ.વિ.), નાણાં વિભાગ, સચિવાલય, ગાંધીનગર.
- (૧૧) સર્વે અ.ઈ.શ્રીઓ મા.મ. વર્તુળ, પેટા/મા.મ. વર્તુળ/ને.હા. વર્તુળ/ એક્સપ્રેસ-વે-વર્તુળ/ પાટનગર યોજના વર્તુળ.
- (૧૨) સર્વે કા.ઈ.શ્રીઓ ઉપર્યુકત વર્તુળો હસ્તકના સર્વે વિભાગો.

STANDARDS FOR CEMENT  
CONSUMPTION FOR DIFFERENT  
ITEMS OF WORK

Government of Gujarat  
Roads & Building Department,  
Circular No. PRC/I 0/2017 /Cement Consumption/16/C  
14, Sardar Bhavan, 2nd Floor,  
Sachivalaya, Gandhinagar  
Date:- 11/05/2017

Read:- Government of Gujarat, Road & Building Department, Sachivalaya, Gandhinagar  
Circular No. SOR/1085/7/H(l) dated 08/12/1986

**CIRCULAR**

The uniform rate of cement consumption for various item was prepared and circulated vide No. SOR/1085/7/H(l) dated 08/12/1986.

At the outset, current practice of estimating cement consumption in concrete item of various Building, Bridge and Road project is based on above circular. However, it is generally observed that the cement consumption derived by actual mix design is lower than the standard cement consumption. Some of provision of the said circular become obsolete due to subsequent revisions in the relevant IS code and IRC code. The maximum cement consumption as per IS : 456-2000 and IRC : 112-2011 is 450 Kg./m<sup>3</sup> . Also cement industry and aggregate crushing industry have involved better quality of cement and aggregate over the years which have far reacting impact on mix design of the present day concrete.

Mix design report of GERI reflecting entire Gujarat region have been considered in averaging the cement consumption in various grade of design mix concrete. To minimize the difference between standard cement consumption of cement and actual consumption derived by mix design by GERI and the cement consumption as per provision of IS and IRC code falling cement consumption is proposed for estimation purpose.

Looking the above facts, the cement consumption mentioned in circular vide No. SOR/1085/7/H(l) dated 08/12/1986 is required to modify as per below:



EXISTING ITEM			AMENDMENT		
Item	Unit	Quantity of cement to be used per unit quantity of work in Kg,	Item	Unit	Quantity of cement to be used per Item Unit quantity of work in Kg
Building, Road & Bridge Items					
Providing & casting in situ ordinary cement concrete M75 for PCC work	Cu.m.	160	Providing & casting in situ ordinary cement concrete M7.5 for PCC work	Cu.m.	160
Providing & casting in situ ordinary cement concrete M100 for PCC work	Cu.m.	220	Providing & casting in situ ordinary cement concrete M10 for PCC work	Cu.m.	220
Providing & casting in situ ordinary cement concrete M150 for PCC work	Cu.m.	320	Providing & casting in situ ordinary cement concrete M15 for PCC work	Cu.m.	290
Providing & casting in situ Control cement concrete M200 for RCC work	Cu.m.	400	Providing & casting in situ Control cement concrete M20 for RCC work	Cu.m.	360
Providing & casting in situ Control cement concrete M250 for RCC work	Cu.m.	450	Providing & casting in situ Control cement concrete M25 for RCC work	Cu.m.	380
Providing & casting in situ Control cement concrete M350 for RCC work	Cu.m.	500	Providing & casting in situ Control cement concrete M35 for RCC work	Cu.m.	425
Providing & casting in situ Control cement concrete M400 for RCC work	Cu.m.	525	Providing & casting in situ Control cement concrete M40 for RCC work	Cu.m.	440
Providing & casting in situ Control cement concrete M450 for RCC work	Cu.m.	540	Providing & casting in situ Control cement concrete M45 for RCC work	Cu.m.	450
New Item					
-	-	-	Providing and casting situ control cement concrete	Cu.m.	410

			M30 for RCC work		
--	--	--	---------------------	--	--

The cement consumption of other than above concrete item and other details mentioned in circular vide No. SOR/1085/7/H(I) dated 08/12/1986 will be remain same.

(N.G.Parmar)  
Officer on Special Duty (S.P)  
R&B Department  
Gandhinagar

To,

- 1) The Personal Secretary, Office of the Secretary, Road & Building Department, Sachivalaya, Gandhinagar
- 2) The Personal Secretary, Office of the Secretary, Narmada, Water Resources, Water Supply and Kalpsar Department, Sachivalaya, Gandhinagar
- 3) The Personal Secretary, Office of the Principal Secretary, Health & Family Welfare Department, Sachivalaya, Gandhinagar
- 4) The Personal Secretary, Office of the Additional Chief Secretary, Urban Development and Urban Housing Department, Sachivalaya, Gandhinagar
- 5) The Personal Secretary, Office of the Principal Secretary, Panchayat, Rural Housing and Rural Development Department, Sachivalaya, Gandhinagar
- 6) Accountant General, Rajkot/ Ahmedabad
- 7) All the Chief Engineers, Road & Building Department, Sachivalaya, Gandhinagar 8) All the Chief Engineers, Narmada, Water Resources, Water Supply and Kalpsar Department, Sachivalaya, Gandhinagar
- 9) The Managing Director, Gujarat State Road Development Corporation, Nirman Bhavan, Gandhinagar
- 10) The Chief Engineer & Director, Staff Training College, Gandhinagar
- 11) The Directro, Gujarat Engineering Research Institute (GERI), Vadodara
- 12) The Under Secretary, Gujarat Vigilance Commission, Vigilance Bhavan, Gandhinagar
- 13) All the Superintending Engineers, Road & Building Department (State, Panchayat, National Highway, Capital Project Circle, Electric Circle)
- 14) All the Executive Engineers, (as above circles)
- 15) All Technical Officers, Road & Building Department, Sachivalaya, Gandhinagar 16) All Technical Branches, Road & Building Department, Sachivalaya, Gandhinagar 17) President, Gujarat Contractors Association, Gajjara Hall, Law Garden, Law College Road, Ahmedabad
- 18) Branch Select file-2017

જે કામ માટે એક જ ટેન્ડર આવેલ હોય તે ટેન્ડર  
પુનઃ માંગવા બાબત

ગુજરાત સરકાર  
માર્ગ અને મકાન વિભાગ  
પરિપત્ર ક્રમાંક:TNC-10-2017-03-C(R&B)  
સચિવાલાય,ગાંધીનગર  
તા.૧૮/૦૨/૨૦૧૭  
સંદર્ભ:- પીડીડબલ્યુ/૧૦૨૦૦૭/(ભાગ-૧)/સ

**પ્રસ્તાવના:-**

અનુભવે પ્રસ્થાપિત થયેલ છે કે બાંધકામની કામગીરી માટે જાહેર નિવિદાથી ટેન્ડરો માંગવામાં આવે છે.ત્યારે કેટલીક વાર એક જ ઇજારદાર દ્વારા ટેન્ડર ભરવામાં આવે ત્યારે આ ટેન્ડર વિભાગીય કક્ષાએ ખોલ્યા બાદ વર્તુળ કચેરીમાં તથા કેટલાક કિસ્સામાં સરકારમાં મંજૂરી અર્થે રજૂ કરવામાં આવે છે.તેમજ કેટલીક વાર ટેન્ડર નામંજૂર કરી પુનઃમાંગવાનો નિર્ણય કરવામાં આવે છે.

પ્રધાનમંત્રી ગ્રામ સડક યોજનાની માર્ગ દર્શિકા પ્રમાણે પ્રથમવારનું સીંગલ ટેન્ડર નહી ખોલવા અને આવું સીંગલ ટેન્ડર ફરીથી માંગવાની કાર્યવાહી કરવાની રહે છે.કેન્દ્રીય તકેદારી આયોગની માર્ગ દર્શિકા મુજબ પણ એક માત્ર ટેન્ડર આવેલ હોયતેવા કિસ્સામાં આવું જ ટેન્ડર મંજૂર નહી કરીને ફરીથી માંગવાની કાર્યવાહી કરવાની રહે છે અને ત્યાર પછીના પ્રયત્નોમાં પણ એક જ ટેન્ડર આવે તો આવું ટેન્ડર જો વ્યાજબી ભાવ વાળું હોય તેવા સંજોગોમાં ટેન્ડર મંજૂર કરવા વિચારણા કરી શકાશે.

**ઠરાવ:-**

- પુખ્ત વિચારણાને અંતે ઉક્ત સંજોગોમાં નીચે મુજબ ની કાર્યપદ્ધતિ નક્કી કરવાનું ઠરાવવામાં આવે છે.
1. જે કામ/પેકેજ માટે માત્ર એક જ ટેન્ડર ભરાઈને આવેલ હોય તેવા કામ/પેકેજના ટેન્ડરને Single Tender જ ગણવાનું રહેશે.આ પ્રકારના કિસ્સામાં ટેન્ડર ખોલવાનું રહેશે નહી તથા પુનઃમાંગવાનું રહેશે.માત્ર વિશિષ્ટ સંજોગો, જેવા કે કુદરતી આપત્તિ અને તાકીદ ની પરિસ્થિતિમાં માંગેલ ટેન્ડરોમાં પૂરતા કારણો તેમજ અભિપ્રાય સાથે સીંગલ ટેન્ડર સ્વીકારવા માટે રજૂ કરવામાં આવે તો તેવા સંજોગોમાં ટેન્ડર મંજૂર કરવા બાબતે વિચારણા કરી શકાશે.
  2. બીજીવાર માંગવામાં આવેલ ટેન્ડરમાં પણ જો એક જ ટેન્ડર ભરાઈને (Single Tender)આવે,તો તે ખોલીને આવું ટેન્ડર જો વ્યાજબી ભાવ વાળું હોય તેવા સંજોગોમાં ટેન્ડર મંજૂર કરવા બાબતે વિચારણા કરવાની રહેશે.

આ હુકમો તાત્કાલિક અસરથી અમલમાં આવે છે.આ ઠરાવ નાંણા વિભાગની ફાઇલ ક્રમાંક:ટીઇએન/૨૦૧૬/એફએ(મા.મ) પર મળેલ સરકારશ્રીની મંજૂરી અન્વયે બહાર પાડવામાં આવે છે ગુજરાત રાજ્યના રાજ્યપાલશ્રીના હુકમથી અને તેમના નામે.

ગુજરાત સરકાર  
માર્ગ અને મકાન વિભાગ  
પરિપત્ર ક્રમાંક:એસ.એચ.આર-૧૦-૨૦૧૫-૧૭-સી  
બ્લોક નં.૧૪, સરદાર ભવન,સચિવાલાય,ગાંધીનગર  
તા.૦૩/૦૨/૨૦૧૭

સંદર્ભ:- મા.મ.વિભાગના પરિપત્ર ક્રમાંક:-એસએચઆર-૧૦-૨૦૧૫-૧૭-સી તા.૨૫-૦૧-૧૬

માર્ગ અને મકાન વિભાગ ના સંદર્ભિત પરિપત્રથી રસ્તા,પુલો, અને મકાનોના કામો માટે પૂર્વ લાયકાત (Prequalification) ના સંકલિત માપદંડો પરિપત્રીત કરવામાં આવેલ છે.જે મુદ્દા (A)Prerequisites માં “Road/Bridge/Building Work-અને એપેન્ડીક્ષ-સી Evaluation Committees માં જણાવેલ છે/ઇજારદારશ્રીઓ હવે અદ્યતન મશીનરી અને ટેક્નોલોજીથી કામો કરતા હોઇ નીચે દર્શાવ્યા મુજબ સુધારો કરવામાં આવે છે.

પરિપત્ર:-

સંદર્ભિત પરિપત્રના મુદ્દા (A)Prerequisites માં જણાવેલ રસ્તા/પુલ/મકાનો ના કામો માટેના પૂર્વલાયકાત મંજૂર કરવા અને એપેન્ડીક્ષ-સીમાં ઇવેલ્યુએશન કમિટીના મંજૂર કરવા અંગેના સ્તરો હવેથી નીચે દર્શાવેલ પત્રક મુજબના રહેશે.

	નાંણાકીય મર્યાદા	હાલની જોગવાઈ (રૂ.કરોડ)	હવે પછીથી જોગવાઈ (રૂ.કરોડ)
૧.	રસ્તાના કામો માટે:-		
	(૧) P.Q.જરૂરી નથી	૪.૦૦ સુધી	૭.૫૦ સુધી
	(૨)અધિક્ષક ઇજનેરશ્રીઓની કમિટી	૧૦.૦૦ સુધી (૪.૦૦ થી ૧૦.૦૦ સુધી)	૧૨.૦૦ સુધી (૭.૫૦ થી ૧૨.૦૦ સુધી)
	(૩) મુખ્ય ઇજનેરશ્રીઓની કમિટી	૧૦.૦૦ થી વધુ	૧૨.૦૦ થી વધુ
૨.	પુલોના કામો માટે:-		
	(૧) P.Q.જરૂરી નથી	૪.૦૦ સુધી	૭.૦૦ સુધી
	(૨)અધિક્ષક ઇજનેરશ્રીઓની કમિટી	૧૦.૦૦ સુધી (૪.૦૦ થી ૧૦.૦૦ સુધી)	૧૨.૦૦ સુધી (૭.૫૦ થી ૧૨.૦૦ સુધી)
	(૩) મુખ્ય ઇજનેરશ્રીઓની કમિટી	૧૦.૦૦ થી વધુ	૧૦.૦૦ થી વધુ
૩.	મકાનોના કામો માટે:-		
	(૧) P.Q.જરૂરી નથી	૪.૦૦ સુધી	૭.૦૦ સુધી
	(૨)અધિક્ષક ઇજનેરશ્રીઓની કમિટી	૧૦.૦૦ સુધી (૪.૦૦ થી ૧૦.૦૦ સુધી)	૧૨.૦૦ સુધી (૭.૫૦ થી ૧૨.૦૦ સુધી)
	(૩) મુખ્ય ઇજનેરશ્રીઓની કમિટી	૧૦.૦૦ થી વધુ	૧૦.૦૦ થી વધુ

સંદર્ભિત પરિપત્રની અન્ય જોગવાઈઓ યથાવત રહે છે.

આ હુકમો નાણાં વિભાગની તા.૨૮/૧૦/૨૦૧૬ ની નોંધથી સરખા ક્રમાંકની ફાઇલ ઉપર મળેલ સંમતિ થી બહાર પાડવામાં આવે છે.

(એન.જી.પરમાર)  
ખાસ ફરજ પરના અધિકારી(વિ.યો.)  
માર્ગ અને મકાન વિભાગ,

## **SPECIAL CONDITION FOR WATER PROOFING**

The contractor shall be responsible for any leakage occurred after the waterproofing work is completed on terrace and he shall make it good at once.

50% amount of the sum payment for the waterproofing item shall be withheld from his amount due for waterproofing and shall be relased after completion of three monsoon,if the leakage is not found.If the leakage is traced,the work shall be redone by the contractor at his cost.

**Deputy Executive Engineer**  
**PIU Zone-6 Godhra**

**Executive Engineer**  
**PIU Zone-6 Godhra**



પી. જે. ભગદેવ  
મુખ્ય ઈજનેર

આર.પી.એ. ડી.

પ્રોજેક્ટ ઈમ્પ્લીમેન્ટેશન યુનિટ  
પી.જી. હોસ્ટેલ, સીવીલ હોસ્પિટલ કેમ્પસ  
સેક્ટર-૧૨, ગાંધીનગર - ૩૮૨૦૧૨  
ફોન નં - ૦૭૯ ૨૩૨ ૩૧૪૩૪

નં. પી.આઈ.યુ./સેલ/ટેન્ડર/ ૪૭૯ /૨૦૧૭

તા. ૦૬-૦૬-૨૦૧૭

### પરિપત્ર

વિષય -- મુળ અંદાજમાં, બ્રાન્ડ/મેઈક/સ્પેશીફિકેશન મુજબ કામગીરી અનુસરવા બાબત  
સંદર્ભ - (૧) આ વિભાગના સરખા ક્રમાંકના પરિપત્ર નં ૩૬૦૫/૨૦૧૫ તા. ૨૧-૦૯-૨૦૧૫  
(૨) આ વિભાગના સરખા ક્રમાંકના પરિપત્ર નં ૩૭૧૨/૨૦૧૫ થા. ૦૧-૧૦-૨૦૧૫  
(૩) આ વિભાગના સરખા ક્રમાંકના પરિપત્ર નં ૪૮૯૭/૨૦૧૬ તા. ૦૭-૧૨-૨૦૧૬  
(૪) આ વિભાગના સરખા ક્રમાંકના પરિપત્ર નં ૭૩૦/૨૦૧૭ તા. ૧૪-૦૨-૨૦૧૭

પી.આઈ.યુ. હસ્તકના બિલ્ડીંગના કામોમાં ઉપરોક્ત સંદર્ભ-૪ ના પરિપત્રથી બ્રાન્ડ/મેઈક નો માલસામાનનો વપરાશ રદ કરવાનો નિર્ણય જણાવેલ હતો અને માત્ર ઈલેક્ટ્રીકલ આઈટમ માટે માર્ગ અને મકાન વિભાગના વિધ્યુત વિભાગ ધ્વારા મંજૂર થયેલ મેઈક લિસ્ટ મુજબ માલસામાન ઉપયોગમાં લેવાની સુચના અમલમાં છે. આમાં અંશતઃ ફેરફાર કરી પી.આઈ.યુ. ના તમામ કામોમાં પણ સિવિલ આઈટમ માટે બિડાણ કરેલ એપ્રુવ મેઈક લિસ્ટ સક્ષમ કક્ષાએથી મંજૂરી મળ્યા મુજબ ત્રણ વર્ષ માટે એટલે કે ડિસેમ્બર-૨૦૧૯ સુધી દાખલ કરવાનો નિર્ણય થયેલ છે તેથી બિલ્ડીંગના બાંધકામ માટેની સિવિલ આઈટમોમાં મેઈક લિસ્ટ મુજબના માલસામાન ઉપયોગમાં લેવા જણાવવામાં આવે છે. .

તાંત્રીક અધિકારીશ્રી ધ્વારા મંજૂર થયેલ / થનાર અંદાજ તેમજ ડી.ટી.પી. માં તેમજ અત્રે મંજૂરી માટે રજુ થતાં અંદાજ તથા ડી.ટી.પી. માં સિવિલ આઈટમનું એપ્રુવડ લિસ્ટ સામેલ કરવા ખાસ નોંધ લેવી

ઉપરોક્ત સુચનાનો અમલ ન થતા તાંત્રીક વહીવટી તથા નાણાંકિય પુત્ર બાબતે નાયબ કાર્યપાલક ઈજનેર. કાર્યપાલક ઈજનેરશ્રી ડીવીઝનલ એકાઉન્ટન્ટ અને અધિક્ષક ઈજનેરશ્રીની અંગત જવાબદારી રહેશે.

( પી. જે. ભગદેવ )

મુખ્ય ઈજનેર

પી.આઈ.યુ. ગાંધીનગર

બિડાણ- ઉપર મુજબ

નકલ સવિનય રવાના-

૧. પ્રતિ, અધિક મુખ્ય સચિવશ્રી, (ત.સે. અને ત.સી.) આરોગ્ય અને પરિવાર કલ્યાણ વિભાગ, નવા સચિવાલય, ગાંધીનગર જાણ સારું.

૨. પ્રતિ, કમિશ્નરશ્રી, આરોગ્ય અને પરિવાર કલ્યાણ વિભાગ, જીવરાજ મહેતા ભવન ગાંધીનગર જાણ સારું.

નકલ રવાના -

૧. અધિક્ષક ઈજનેરશ્રી તમામ..... જાણ તથા અમલ સારું.

૨. કાર્યપાલક ઈજનેરશ્રી તમામ..... જાણ તથા અમલ સારું.

૩. ડિવિઝનલ એકાઉન્ટન્ટ તમામ..... જાણ તથા અમલ સારું.


૪. નાયબ કાર્યપાલક ઈજનેરશ્રી તમામ..... જાણ તથા અમલ સારું

૫. શ્રી દીલીપ કાપડીયા, આઈ.ટી. આસિસ્ટન્ટ, તમામ ઓનલાઈન ટેન્ડર્સમાં સિવિલ આઈટમનું એપ્રુવ લિસ્ટ સામેલ કરવા સારું.



### BRAND NAME FOR VARIOUS ITEMS

Sr. No.	Materials	Brand																																																						
1	Cement	Ultratech, Siddhi, Ambuja, JK, Sanghi, Kamal, Jaypee, Hi-Bond																																																						
2	Steel	Vizag, God, Electrotherm Tata, ASR Thermax Sail, Gallant Sanghi, Friends Vinayak, Varsana, Utkarsh, Aditya, Grace Akshat TMT 500 Gold, National, German TMX, Mono Vibrant TMT																																																						
3	Brick	Burnt clay brick should be as per Specification with frog																																																						
4	Glazed Tiles / Ceramic Tiles	Pavit Lava Forte 3054 (For Residential quarter D & Above type) Bell, Bajaj Kajaria Nitco Somani Johnson Cera Swastik Simpolo																																																						
5	Vitrified Tiles	Vitrified tiles shall be double charged full body with first quality (IInd or IIIRD quality shall not be allowed)																																																						
		<table> <tr> <th>Sr. No.</th><th>Brand</th><th>Product Name</th></tr> <tr><td>1</td><td>Vermora</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>2</td><td>Johnson</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>3</td><td>Kohinoor</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>4</td><td>City Tiles</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>5</td><td>Bonzer 7</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>6</td><td>Swastik</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>7</td><td>Somany</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>8</td><td>AGL - Asian Granito India Ltd.</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>9</td><td>Cera</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>10</td><td>Simpolo</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>11</td><td>Zealtop</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>12</td><td>Marbita</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>13</td><td>Exxaro</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>14</td><td>Crystal</td><td>Double Charged Vitrified Tiles</td></tr> <tr><td>15</td><td>Riwasa</td><td>Double Charged Vitrified Tiles</td></tr> <tr> <td>16</td><td>Pavit</td><td>Sabia / Polvo (16" x 16") (For ramp) Terrene 16" x 16" Vitrefied Matt (For ramp)</td></tr> <tr><td>17</td><td>Excel</td><td>Vitrified Parking Tiles</td></tr> </table>	Sr. No.	Brand	Product Name	1	Vermora	Double Charged Vitrified Tiles	2	Johnson	Double Charged Vitrified Tiles	3	Kohinoor	Double Charged Vitrified Tiles	4	City Tiles	Double Charged Vitrified Tiles	5	Bonzer 7	Double Charged Vitrified Tiles	6	Swastik	Double Charged Vitrified Tiles	7	Somany	Double Charged Vitrified Tiles	8	AGL - Asian Granito India Ltd.	Double Charged Vitrified Tiles	9	Cera	Double Charged Vitrified Tiles	10	Simpolo	Double Charged Vitrified Tiles	11	Zealtop	Double Charged Vitrified Tiles	12	Marbita	Double Charged Vitrified Tiles	13	Exxaro	Double Charged Vitrified Tiles	14	Crystal	Double Charged Vitrified Tiles	15	Riwasa	Double Charged Vitrified Tiles	16	Pavit	Sabia / Polvo (16" x 16") (For ramp) Terrene 16" x 16" Vitrefied Matt (For ramp)	17	Excel	Vitrified Parking Tiles
Sr. No.	Brand	Product Name																																																						
1	Vermora	Double Charged Vitrified Tiles																																																						
2	Johnson	Double Charged Vitrified Tiles																																																						
3	Kohinoor	Double Charged Vitrified Tiles																																																						
4	City Tiles	Double Charged Vitrified Tiles																																																						
5	Bonzer 7	Double Charged Vitrified Tiles																																																						
6	Swastik	Double Charged Vitrified Tiles																																																						
7	Somany	Double Charged Vitrified Tiles																																																						
8	AGL - Asian Granito India Ltd.	Double Charged Vitrified Tiles																																																						
9	Cera	Double Charged Vitrified Tiles																																																						
10	Simpolo	Double Charged Vitrified Tiles																																																						
11	Zealtop	Double Charged Vitrified Tiles																																																						
12	Marbita	Double Charged Vitrified Tiles																																																						
13	Exxaro	Double Charged Vitrified Tiles																																																						
14	Crystal	Double Charged Vitrified Tiles																																																						
15	Riwasa	Double Charged Vitrified Tiles																																																						
16	Pavit	Sabia / Polvo (16" x 16") (For ramp) Terrene 16" x 16" Vitrefied Matt (For ramp)																																																						
17	Excel	Vitrified Parking Tiles																																																						
6	GI Pipes & Fittings	Asian Surya Tata Zindal Prayag All GI fittings should be of ISI Brand																																																						

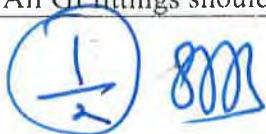

Sr. No.	Materials	Brand
7	Rigid PVC Pipe & Fittings	Kisan
		Supreme
		Prince
		Asian
		Precision
		Ajay
		Dutron
		All PVC fittings Should be of same Brand.
8	CP Brass Fittings	Cabtree
		Essco
		ESS-ESS
		Plumber
		CERA
		Somany
		Prayag
9	Stop / Fullway Wheel Valve	Leader
		Zoloto
		Crs
10	PVC tank	Sintex (Sintex RENO Brand shall not be allowed)
11	Hard ware fittings	It should be of Stainless Steel and ISI mark including SS Hinges & Screws
12	Cement Paint / Acrylic Paint	Snow Cem, Indo Cem, Asain, Burger
13	Enamel Paint	Asian, Nerolac, Burger
14	Distemper	Asian, Nerolac, Burger
15	Toilet Doors	PVC Accusel
16	Alluminium Section	Jindal, Hindalco
17	Sanitary Ware	Cera, Hindware, Somany, Simpolo, Parryware
18	Water Proofing Material	Kryton, Xypex
19	Hospital Furniture	Parin, Godrej, Bhavna, Janak, HOF
20	Office Furniture	Parin, Godrej, Bhavna, HOF

2/2

8/8



પી. જે. ભગદેવ  
મુખ્ય ઈજનેર

પ્રોજેક્ટ ઈમ્પ્લીમેન્ટેશન યુનિટ  
એન.એચ.એમ./પી.આઈ.યુ. બિલ્ડીંગ,  
ચોથો માળ, સીવીલ હોસ્પિટલ કેમ્પસ  
સેક્ટર-૧૨, ગાંધીનગર - ૩૮૨૦૧૨  
તા. /૦૮/૨૦૧૯

નં. પી.આઈ.યુ. / ટેન્ડર સેલ/ 3000 / ૨૦૧૯

પરિપત્ર

3 AUG 2019

વિષય - મુળ અંદાજમાં, બ્રાન્ડ/મેઈક/સ્પેશીફિકેશન મુજબ કામગીરી અનુસરવા બાબત  
સંદર્ભ - (૧) આ વિભાગના સરખા ક્રમાંકના પરિપત્ર નં ૪૧૭૧/૨૦૧૯ તા. ૦૬-૧૦-૨૦૧૭

પી.આઈ.યુ. હસ્તકના બિલ્ડીંગના કામોમાં સિવિલ આઈટમોમાં મેઈક લીસ્ટ મુજબનો માલસામાન વપરાશમાં લેવા એપ્રુવડ મેઈક લીસ્ટની યાદી સંદર્ભમાં દર્શાવેલ પરિપત્રથી આપવામાં આવેલ છે જે અમલમાં છે.

સક્ષમ કક્ષાએથી મંજૂરી મળતા નીચે મુજબના માલસામાન વધારાની બ્રાન્ડ મેઈક લીસ્ટમાં સામેલ કરવી

Sr No.	Material	Brand	Validity
1	Cement	WONDER CEMENT	31-12-2021
2	Steel	KAMDHENU NXT	31-12-2021
3	Vitrified Tiles Double Charge	CENGRES TILES	31-12-2021
		SAKAR MARBO	31-12-2021

તાંત્રિક અધિકારીશ્રી ધ્વારા મંજૂર થયેલ / થનાર અંદાજ તેમજ ડી.ટી.પી. માં તેમજ અત્રે મંજૂરી માટે રજુ થતાં અંદાજ તથા ડી.ટી.પી. માં સિવિલ આઈટમનું એપ્રુવડ લિસ્ટ સામેલ કરવા ખાસ નોંધ લેવી

ઉપરોક્ત સુચનાનો અમલ ન થતા તાંત્રિક વહીવટી તથા નાણાંકિય પ્રશ્ન બાબતે નાયબ કાર્યપાલક ઈજનેર, કાર્યપાલક ઈજનેરશ્રી ડીવીઝનલ એકાઉન્ટન્ટ અને અધિક્ષક ઈજનેરશ્રીની અંગત જવાબદારી રહેશે.



( પી. જે. ભગદેવ )

મુખ્ય ઈજનેર

પી.આઈ.યુ. ગાંધીનગર

બિડાણ- ઉપર મુજબ

નકલ સવિનય રવાના-

૧. પ્રતિ, અધિક મુખ્ય સચિવશ્રી, (ત.સે. અને ત.સી.) આરોગ્ય અને પરિવાર કલ્યાણ વિભાગ, નવા સચિવાલય, ગાંધીનગર જાણ સારું.

૨. પ્રતિ, કમિશ્નરશ્રી, આરોગ્ય અને પરિવાર કલ્યાણ વિભાગ, જીવરાજ મહેતા ભવન ગાંધીનગર જાણ સારું.

નકલ રવાના -

૧. અધિક્ષક ઈજનેરશ્રી તમામ..... જાણ તથા અમલ સારું.

૨. કાર્યપાલક ઈજનેરશ્રી તમામ..... જાણ તથા અમલ સારું.

૩. ડિવિઝનલ એકાઉન્ટન્ટ તમામ..... જાણ તથા અમલ સારું.

૪. નાયબ કાર્યપાલક ઈજનેરશ્રી તમામ..... જાણ તથા અમલ સારું

૫. શ્રી દીલીપ કાપડીયા, આઈ.ટી. આસિસ્ટન્ટ, તમામ ઓનલાઈન ટેન્ડર્સમાં સિવિલ આઈટમનું એપ્રુવડ લિસ્ટ સામેલ કરવા સારું.





**B.C. Patel**  
**Superintending Engineer**

Commissionerate of Health,  
Health, Medical Services & Medical Education  
Project Implementation Unit  
4<sup>th</sup> floor, RDD/NHM/  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393  
Fax : (079) 23231995

PIU / ACs / Approval Make / Cement / 1935 / 2019

Date: - /05/2019

**28 MAY 2019**

To  
Wonder Cement Ltd.  
402, 4<sup>th</sup> Floor, Shail's Mall,  
B/h Girish Cold drinks C.G. Road,  
Navrang pura Ahmedabad-380009  
Gujrat India.

Sub: Approval of brand name of "WONDER CEMENT"

Ref.: (1) Wonder Cement Ltd., Ahmedabad 's Letter dtd; 30/12/2017  
(2) PIU circular No / PIU/Cell/tender /4741/2017 Dtd; 21/11/2017

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of cement to be used for construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS norms. Therefore, brand name of "Wonder Cement" is hereby approved for incorporating in the list of approved brand for construction of Health care Structure.

The Wonder Cement to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "WONDER CEMENT" Brand is granted for a period of three (03) years from today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

*M Patel* 28/05/19  
(B. C. Patel)  
Superintending Engineer  
PIU, Gandhinagar

Copy Respectfully Submitted to.

1) The Chief Engineer PIU, Gandhinagar

Copy f.w.c.s

1) Superintending Engineer (All) for information  
2) Executive Engineer (All) for information





**B.C. Patel**  
Superintending Engineer

Commissionerate of Health,  
Health, Medical Services & Medical Education  
Project Implementation Unit  
4<sup>th</sup> floor, RDD NHM/  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393  
Fax : (079) 23231995

PIU / ACs / Approval Make / Steel / **2091** / 2019

Date:- 06/06/2019

10 JUN 2019

To  
Someshwar Ispat Pvt. Ltd,  
4,3<sup>rd</sup> Floor, Someshwar Shopping Mall,  
Modhera Road, Mehsana-384002  
Gujrat India.

Sub: Approval of brand name of "KAMDHENU NXT"

Ref: (1) Someshwar Ispat Pvt. Ltd, Mehsana 's Letter dtd; 31/07/2018  
(2) PIU circular No / PIU/Cell/tender /4741/2017 Dtd; 21/11/2017

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of steel to be used for construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS norms. Therefore, brand name of "KAMDHENU NXT" is hereby approved for incorporating in the list of approved brand for construction of Health care Structure.

The KAMDHENU NXT to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "KAMDHENU NXT" Brand is granted for a period of three (03) years from today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

M, 10/06/19  
(B. C. Patel)  
Superintending Engineer  
PIU, Gandhinagar

Copy Respectfully Submitted to.

1) The Chief Engineer PIU, Gandhinagar

Copy f.w.c.s

1) Superintending Engineer (All) for information

2) Executive Engineer (All) for information

D. Amita//Brand Name Approval Order/PIU/Gandhinagar





**B.C. Patel**

**Superintending Engineer**

Commissionerate of Health,  
Health, Medical Services & Medical Education  
Project Implementation Unit  
4<sup>th</sup> floor, RDD/NHM/  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393  
Fax : (079) 23231995

PIU / ACs / Approval Make / Vitrified Tile / **1751** / 2019

Date:- /05/2019

**24 MAY 20**

To  
Cengres Tiles Limited.  
D/401, Ganesh Meridian,  
Sola, S.G.Highway,Ahmedabad-380060  
Gujrat India.

Sub: Approval of brand name of "CENGRES TILES"

Ref.: (1) Cengres Tiles Limited., Ahmedabad 's Letter dtd; 12/10/2018  
(2) PIU circular No / PIU/Cell/tender /4741/2017 Dtd; 21/11/2017.

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of double charged vitrified tiles to be used for construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS norms. Therefore, brand name of "Cengres Tiles Double charged Vitrified tiles" is hereby approved for incorporating in the list of approved brand for construction of Health care Structure.

The double charged vitrified tiles to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "CENGRES TILES (Double charged Vitrified Tile)" Brand is granted for a period of three (03) years from today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

*TP Patel*  
(B. C. Patel)  
Superintending Engineer  
PIU, Gandhinagar

Copy Respectfully Submitted to,

1) The Chief Engineer PIU, Gandhinagar

Copy f.w.c.s

1) Superintending Engineer (All) for information

2) Executive Engineer (All) for information

D. Anita/Brand Name Approval Order/PIU/Gandhinagar

*Received by  
Kasthkey Jadhav  
H.V. Jadhav  
27/5/19*





**B.C.Patel**  
**Superintending Engineer**

Commissionerate of Health,  
Health, Medical Services & Medical Education  
Project Implementation Unit  
4<sup>th</sup> floor, RDD/NIHM/  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393  
Fax : (079) 23231995

PIU / ACs / Approval Make / Vitrified Tile / 1906 / 2019

Date:- /05/2019

28 MAY 20

To  
Sakar Granito (I) Pvt Ltd,  
401, 4<sup>th</sup> Floor, Shefali Centre,  
Paldi, Ahmedabad-380006  
Gujrat India.

**Sub:** Approval of brand name of "SAKAR MARBO"

**Ref:** (1) Sakar Granito (I) Pvt Ltd, Ahmedabad 's Letter dtd; 19/02/2018  
(2) PIU circular No / PIU/Cell/tender /4741/2017 Dtd; 21/11/2017

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of double charged vitrified tiles to be used for construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS norms. Therefore, brand name of "Sakar marbo Double charged Vitrified tiles" is hereby approved for incorporating in the list of approved brand for construction of Health care Structure.

The double charged vitrified tiles to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "SAKAR MARBO (Double charged Vitrified Tile)" Brand is granted for a period of three (03) years from today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

*MPA*  
28/05/19  
(B. C. Patel)  
Superintending Engineer  
PIU, Gandhinagar

Copy Respectfully Submitted to,

1) The Chief Engineer PIU, Gandhinagar

Copy f.w.c.s

1) Superintending Engineer (All) for information

2) Executive Engineer (All) for information

D: Amita/Brand Name Approval Order/PIU/ Gandhinagar

**ELECTRICAL MAKE LIST**

SR.NO.		MAKE LIST
1	H.T. MC /RMU PANEL	L&T / SIEMENS / ABB / SCHNEIDER ELECTRIC. /CROMPTON
2	H.T. VCB	L&T / SIEMENS / ABB / SCHNEIDER ELECTRIC. HT PANEL SHALL BE OEM OR OEM PARTNER.
3	PROTECTION RELAY FOR H.T PANEL	ABB / L&T / SIEMENS / SCHNEIDER / CSPC / ALSTOM
4	H.T. XLPE CABLE	FINOLEX / RR KABLE / AVOCAB / HAVELLS/ POLYCAB
5	H.T. JOINT (HEAT SHRINKABLE)	RAYCHEM / 3-M
6	CSS	SCHNEIDER / ABB / SEIMENS - C&S / VOLTAMP
7	DRY/ OIL TYPE TRANSFORMER	SCHNEIDER/ VOLTAMP / UNIMAG/ ABB / UNITRANS
8	SWITCHGEAR	SCHNEIDER / L & T / LEGRAND / ABB / SIEMENS
9	MEDIUM VOLTAGE CABLE / CONTROL / FLEXIBLE CABLE / WIRES FOR INTERNAL WIRING	RR KABLE / HAVELLS / POLYCAB / AVOCAB / FINOLEX/ KEI
10	DG SET	CUMMINS / CATERPILLER / PERKINS /KISLOSHKAR
11	DG SET AMF PANEL	AS PER THE DG SET SUPPLIER. (SWITCHGEAR AS PER MAKE LIST.)
12	LT PANELS AS PER IEC 61439 (TTA) PANELS	LEGRAND / SCHNEIDER / ABB / L&T / SEIMENS/OEM CERTIFIED IEC- 61439 REQUIRED.
13	LT PANELS AS PER CPRI	FABRICATED PANELS WITH STANDARD APPROVED SWITCH GEARS & ACCESSORIES CPRI / ERDA APPROVED PANEL SUPPLIERS, 65 KA SHORT CIRCUIT WITHSTAND STRENGTH. OEM APPROVED.
14	APFC PANEL	SCHNEIDER -VARSET / DATAR /L & T / EPCOS
15	CAPACITOR	SCHNEIDER / DATAR / EPCOS/CONZERV
16	DISTRIBUTION BOARDS	LEGRAND / SCHNEIDER / SIEMENS / HONEYWELL / L&T / HAGER /MK / ORIENT
17	LT ACB	SIEMENS / SCHNEIDER / ABB / LEGRAND / L&T
18	LT MCCB WITH EARTH FAULT	SIEMENS / SCHNEIDER / ABB / LEGRAND / L&T
19	LT MCB, ELCB,ISOLATOR	LEGRAND / SCHNIEDER / SIEMENS / HONEYWELL/ L&T / HAGER/ C&S
20	LT SFU	LEGRAND / SCHNIEDER / SIEMENS / HONEYWELL/ L&T / HAGER/ C&S
21	LT CONTACTORS	LEGRAND / SCHNIEDER / SIEMENS / HONEYWELL/ L&T / HAGER/ C&S
22	CURRENT TRANSFORMER & POTENTIAL TRANSFORMER	AE / ASHMOR / SEI / SARTHI/ L&T
23	METERS (DIGITAL)	CONZERVE / SCHNEIDER / SECURE / L & T / LEGRAND/ABB
24	LOAD MANAGER/MFM	CONZERVE / SCHNEIDER / SECURE / L & T / LEGRAND /ABB
25	PROTECTION RELAYS- EARTH FAULT	SIEMENS / L & T / SCHNEIDER / ABB / ALSTOM / CSPC
26	INDICATING LAMP	SIEMENS / SCHNEIDER ELECTRIC / L & T - ESBEER / TEKNIC -KEYCEE/ ABB



**Superintending Engineer (Elect.)**

**CHINAGAD**

27	ELECTRIC TIMER	SIEMENS / L&T / LEGRAND / CONSERVE / RUSHABH ENTERPRISE / ABB
28	ROTARY SWITCH	SIEMENS / SCHNEIDER ELECTRIC / TEKNIC - KEYCEE / SALZER / L & T
29	PUSH BUTTON AND PUSH BUTTON SET	SCHNEIDER ELECTRIC / L & T / BINAY / RAAS CONTROL
30	SELECTOR SWITCH	TEKNIC - KEYCEE / SALZER / L&T
31	ANNUNCIATOR	PROTON / EAPL / TEKNIKA
32	LUGS / BIMETALLIC LUGS	DOWELL'S / HMI / COMET/ HEX
33	CABLE GLAND	JAINSON / COMET / POLYCAB/ HEX
34	CONNECTORS ( COLOURS AS PER PHASE & NEUTRAL )	SALZER / ELEMEX / L&T
35	ATS	ASCO / SOCOMEC / L&T
36	CABLE TRAY ( ALL TYPE )	LEGRAND-CABLOFOIL / OBO BETTERMAN / PROFAB
37	SPD	NISHARP - CAPE / OBO / LEGRAND/ SCHNEIDER
38	DWC PIPE	REX / NOBLE / ASTRAL
39	L.T. CABLE JOINTING KIT	RAYCHEM / 3-M
40	PVC CONDUITS AND ACCESSORIES	PRECISION / NIHIR / POLYCAB / ASTRAL / BBC/BEC/VRAJ
41	CASING CAPING	PRECISION / NIHIR / VRAJ / ASTRAL/ BEC
42	FLOOR TRUNKING & FLOOR JUNCTION BOX	MK-HONEYWELL/ LEGRAND / OBO
43	MODULAR SWITCHES, SOCKETS & OTHER ACCESSORIES	MK-HONEYWELL / LEGRAND / SCHNEIDER/ GREATWHITE / PANASONIC/ HAVELLS / ORIENT/ L&T
44	METAL CLAD SOCKET WITH MCB	LEGRAND / HONEYWELL/ SCHNEIDER / HENSEL
45	PVC TAPE	STEEL GRIP/ANCHOR
46	PVC JUNCTION BOX	PRECISION / NIHIR / POLYCAB / ASTRAL / BBC
47	COAXIAL TV CABLE	DELTON / HAVELLS / RR / FINOLEX / POLYCAB
48	INTERNAL LIGHT FIXTURE	JAQUAR / LIGHTING TECHNOLOGIES / PHILIPS / HAVELLS/ PANASONIC/WIPRO /SURYA
49	HIGH SPEED FAN & EXHAUST FAN	BAJAJ/ HAVELLS/ CROMPTON/USHA / ORIENT
50	EXTERNAL LIGHT FIXTURE	JAQUAR / LIGHTING TECHNOLOGIES / PHILIPS / HAVELLS/ PANASONIC/WIPRO /SURYA
51	POLE	K - LITE / AMBICA / FABRICATED / OR AS PER INTERIOR/ARCHITECT SELECTION
52	METAL CONDUIT	BEC / AKG / BHARAT/STEEL CRAFT
53	UPS SYSTEM	NUMERIC / APC /VERTIV /EATON
54	EARTHING SYSTEM	CAPE - NISHARP / OBO BETTERMANN / ABB
55	LIGHTNING PROTECTION	CAPE - NISHARP / OBO BETTERMANN / ABB
56	IP JUNCTION BOX	HENSEL / LEGRAND / OBO / RITTAL
57	WATER COOLER	VOLTAS/ USHA/ BLUE STAR
58	MOTOR PUMP SET	CROMPTON/ KIRLOSKAR/ LUBI
59	CALL BELL	ANCHOR/ ORPAT/ VISION
60	BUSDUCT	SCHNEIDER/ LEGRAND/ C&S/ L&T
61	LIFTS	OTIS / MITSUBISHI / SCHINDLER/ORBIS/TRIO/TECHNO

Superintending Engineer (Elect.)  
P.I.U., GANDHINAGAR



**Special Note:-**

1	The MCB And MCB DB'S Must Be Of Same Make.
2	If " <b>Equivalent Make</b> " is proposed for the items then Contractor is required to submit Detailed specifications / certificates for the proposed make for BOQ item, which shall be considered/approved by the Chief Engineer after evaluating that make shall comply provision of relevant IEC codes and standard guide lines and also performance in consultation under Engineer Incharge . Necessary documents in support of the same shall be submitted before procurement to Engineer in Charge for approval.
3	Makes/ Models of items of all fixtures/ Items/ Materials must be got approved from the Engineer in charge well before placing any order to the OEM. The contractor/ agency is required to submit all relevant test certificates documents and along with the proposal. The decision of Engineer-in-charge is binding in this regard and no variation is acceptable.
4	All The Material Should Be IEC Compliant As Per Standard Mentioned In Tender Make List.
5	The Make Approved Shall Be Guaranteed To Have Support From OEM For Minimum 10 Years With Required Spares.
6	The Material With Higher Delivery Lead Time Shall Be Immediately Informed To Client / Consultant Before Order Execution.
7	Procurement of item with aesthetic value and visibility shall be on prior approval of Engineer in charge for specific area of application.



Superintending Engineer (Elect.)  
P.I.U., GANDHINAGAR



# ELV & AV Make List

SR.NO.	ITEM DESCRIPTION	MAKE LIST
1	COMPONENTS FOR STRUCTURE CABLING SYSTEM	COMMSCOPE - TYCO/ MOLEX/ D-LINK/ R & M/ LEGRAND
2	NETWORK RACKS	APW/ RITTAL/ VALRACK/APC
3	NETWORK SWITCHES	HPE / CISCO / EXTREME / JUNIPER
4	10G SFP MODULE	HPE / CISCO / EXTREME / JUNIPER
5	WIRELESS CONTROLLER	HPE / CISCO / EXTREME / JUNIPER
6	ACCESS POINTS	HPE / CISCO / EXTREME / JUNIPER
7	UNIFIED THREAT MANAGEMENT SYSTEM	SONICWALL / CISCO / FORTINATE / PALOALTO
8	EPABX SYSTEM	NEC/KAREL/CISCO/ MATRIX/ UNIFY/ AVAYA
9	DIGITAL PHONE	NEC/KAREL/CISCO/ MATRIX/ UNIFY/ AVAYA
10	CLI PHONE	NEC/KAREL/CISCO/ MATRIX/ UNIFY/ AVAYA
11	IP PHONE	NEC/KAREL/CISCO/ MATRIX/ UNIFY/ AVAYA
12	FIRE ALARM PANEL	NOTIFIER / JOHNSON CONTROL/ TFC/SIEMENS / BOSCH
13	REPEATER PANEL	NOTIFIER / JOHNSON CONTROL/ TFC/SIEMENS / BOSCH
14	SMOKE/ MULTI CRITERIA/ THERMAL/ MONITOR MODULE/ CONTROL MODULE/ ISOLATOR MODULE/ SOUNDER/	NOTIFIER / JOHNSON CONTROL/ TFC/SIEMENS / BOSCH
15	2C 1.5 SQMM FRLS ARMoured CABLE	HAVELLS/RR CABEL/ POLYCAB/R & M
16	NETWORK CONTROLLER	BOSCH / HARMAN/TOA/AXIS/UNIFY
17	POWER AMPLIFIER	BOSCH / HARMAN/TOA/AXIS/UNIFY
18	MULTI CHANNEL INTERFACE	BOSCH / HARMAN/TOA/AXIS/UNIFY
19	DIGITAL CALL STATION	BOSCH / HARMAN/TOA/AXIS/UNIFY
20	NETWORK CABLE & ASSEMBLIES	BOSCH / HARMAN/TOA/AXIS/UNIFY
21	CEILLING SPEAKER	BOSCH / HARMAN/TOA/AXIS/UNIFY
22	CABINET SPEAKER	BOSCH / HARMAN/TOA/AXIS/UNIFY
23	SOFTWARE FOR PA SYSTEM	BOSCH / HARMAN/TOA/AXIS/UNIFY
24	2C 1.5 SQMM FLEXIBLE CABLE	HAVELLS/RR CABEL/ POLYCAB/R & M
25	FINGER & CARD BASED CONTROLLER	SALTO/KANTECH/CEM / SUPREMA
26	CARD BASED READER	SALTO/KANTECH/CEM / SUPREMA
27	ACCESS CONTROL & TIME ATTENDANCE SYSTEM	SALTO/KANTECH/CEM / SUPREMA/UNIFY
28	DOME/ BULLET CAMERA (FIXED & VARIFOCAI)	BOSCH /AXIS /PANASONIC/HOENYWELL /MOBOTIX
29	PTZ CAMERA	BOSCH /AXIS /PANASONIC/HOENYWELL /MOBOTIX
30	VIDEO MANAGEMENT SOFTWARE	MILESTONE /GENETEC /CAMERA OEM/QOGNIFY
31	VIDEO MANAGEMENT SERVERS	HP/ DELL/ CISCO/CAMERA OEM
32	RECORDING SERVER	HP/ DELL/ CISCO/CAMERA OEM
33	CENTRALIZED STORAGE	DELL / HP / IBM
34	VIDEO CONFERENCE SYSTEM	CISCO/ AVER/SONY/ AVAYA
35	INTERACTIVE DISPLAY	Newline/Beng/Samsung/Barco
36	BUILDING MANAGEMENT SYSTEM - CONTROLLER	JOHNSON CONTROL-METASYS/ SIEMENS/ALC/Honeywell
37	BUILDING MANAGEMENT SYSTEM - SENSORS	SIEMENS / DWYER / GREYSTONE / OMICRON / FILP

Superintending Engineer (Elect.)  
P.I.U., GANDHINAGAR



38	MULTI VIEWER	Crestron/Lightware/Extron/AMX
39	MATRIX SWITCHER	Crestron/Lightware/Extron/AMX
40	ENCODING/ DECODING DEVICES	Crestron/Lightware/Extron/AMX
41	ROOM CONTROLLER	Crestron/Lightware/Extron/AMX
42	POE TOUCH PANEL	Crestron/Lightware/Extron/AMX
43	HD STREAMING TRANSMITTER/ RECEIVER	Crestron/Lightware/Extron/AMX
44	HDMI CABLES	Crestron/Lightware/Extron/AMX
45	PASSIVE HDMI WALL PLATE	Crestron/Lightware/Extron/AMX
46	AUDIO CABLE	Crestron/Lightware/Extron/AMX
47	SPEAKER CABLE	Crestron/Lightware/Extron/AMX
48	NETWORK MANAGEMENT SOFTWARE	Crestron/Lightware/Extron/AMX
49	HEAD CAMERA SOLUTION	DESIGN FOR VISION/SUN OPTICS/INTEGRA/BFW/LUXTEC
50	MEDICAL GRADE DISPLAY	BARCO/HIGHNESS/FNS
51	DIGITAL SIGNAL PROCESSOR	BIAMP/HARMAN/CLEARONE
52	CEILING SPEAKER	Bosch/Harman/Toa/Axis
53	AMPLIFIER	Bosch/Harman/Toa/Axis
54	HEAD WARM MICROPHONE	SENNHEISER/BEYERDYNAMIC/AUDIOTECHNICA/Elcra-Voice
55	20X PTZ CAMERA	BOSCH /AXIS /PANASONIC/HOENYWELL /MOBOTIX
<b>Special Note:-</b>		
1	If "Equivalent Make" is proposed for the items then Contractor is required to submit Detailed specifications / certificates for the proposed make for BOQ item, which shall be considered/approved by the Engineer-in-Charge after evaluating that make shall comply provision of relevant IEC codes and standrad guide lines and also performance in consultation under Engineer Incharge . Necessary documents in support of the same shall be submitted before procurement to Chief Engineer for approval.	
2	Makes/ Models of items of all fixtures/ Items/ Materials must be got approved from the Engineer in charge well before placing any order to the OEM. The contractor/ agency is required to submit all relevant test certificates documents and along with the proposal. The decision of Engineer-In-charge is binding in this regard and no variation is acceptable.	
3	All The Material Should Be IEC Compliant As Per Standard Mentioned In Tender Make List.	
4	The Make Approved Shall Be Gauranteed To Have Support From Oem For Minimum 10 Years With Required Spares.	
5	The Material With Higer Delivery Lead Time Shall Be Immediatly Informed To Client / Consultant Before Order Execution.	
6	Procurement of item with aesthetic value and visibility shall be on prior approval of Engineer in charge for specific area of application.	

  
 Superintending Engineer (Elect.)  
 P. I. U., GANDHINAGAR


## HVAC MAKE LIST

Sr No.	Material/ Item	Make
1.	Air handling Units/ Treated fresh air units	Systemair/ Edgetech/ Citizen/ ZECO/ Vayhan/ Equivalent
2.	Air Washer	Systemair/ Edgetech/ Citizen/ ZECO/Humidin/ Vayhan/ Equivalent
3.	Air Separator	Xylem/ Emerald/ Anergy/ K D Agencies/ Equivalent
4.	Al. Sheets	Hindalco/ Balco/ Nalco/ Equivalent
5.	Aluminum tape	Johnson/ Birla-3M/ Nippon Industries/ Equvelant
6.	Anchor/ Fastener	Hilti/ Fisher/ MUPRO/ Equivalent
7.	Auto Air Vent	Anergy/ RapidControl/ Sant Industries/ Honeywell/Castle/ Equivalent
8.	Air Curtain	VTS / ACME/ Equivalent
9.	Balancing Valves	Advance/ Honeywell/ Danfoss/ T&A/ Flowcon/ Equivalent
10.	Ball Valves set with &without Y Strainer For FCU,Cassette & Hi-wall	Honeywell/ Emerald/ Zoloto/ Sant/ Equivalent
11.	Butterfly Valves	Audco/ Advance/ Kitz/ Equivalent
12.	Ball Valve	Zoloto/ Honeywell/ Audco/ Emerald/ Rapid Control/ Castle/ Kitz/ Equivalent
13.	Cabinet Fans	Systemair/ Kruger/ Greenheck/Airflow / Wolter / Nicotra/ Equivalent
14.	Centrifugal Fans for ventilation/ AHUs/ Airwasher	Systemair/ Kruger/ Greenheck/Nicotra/Wolter/ Equivalent
15.	SCREW Water chilling machine/ Chiller plant manager (CPM)	Carrier/ York/ Trane/ Daikin/ Kirloskar/Voltas/Dunhambush/Bluestar / Kehems/ Equivalent
16.	Auto tube cleaning	Carrier/ Ecogreen/ CET Enviro / Kirloskar/ Equivalent
17.	Celdeck Pad	DRI/ Humidin/ Munters/ Equivalent
18.	Check Valves	Audco/ Advance/ Honeywell/ Sant/ Equivalent

**Superintending Engineer (Electrical)**  
**Project Implementation Unit**  
 Gandhinagar



Sr No.	Material/ Item	Make
19.	Closed Cell Nitrile rubber insulation/ EPDM insulation	Armacell/ K- Flex/ A-Flex/ ALP aeroflex/ supreme/ Equivalent
20.	Closed Expansion Tank	Xylem/ Armstrong/ Reflex/ Sevcon/ Emerald/ Anergy/ Equivalent
21.	FLRS Cables	As per Electrical Section make list/ Equivalent
22.	Cooling Towers (CTI CERTIFIED)	Advance/ Marley/ Paharpur/ Bell/ Equivalent
23.	Differential Pressure Switch (Water)	Johnson/ Staefa/ Honeywell/ Equivalent
24.	DX units and VRF	Daikin/ Hitachi/ Toshiba/ Blue Star/ Mitsubishi Electric/ LG /carrier/Voltas/Samsung/ Equivalent
25.	Dry Scrubber	Trion/ Ryd Air/Humidin/ ESPAIR/ Equivalent
26.	Chilled Water Cassette Unit	Bhutoria / Caryair / Kubic/ Equivalent
27.	Expansion Bellows/ Pipe Supports/ Vibration Isolators/ Duct Flexile Connections	Resistoflex/ Kanwal(Easyflex)/ Cori/ Flexionics/ Equivalent
28.	Fan coil Units & Ductable Unit	Edgetech/ JCI/ Citizen/ Zeco/Carrier/Mideakubic/ Bhutoria/ Equivalent
29.	Filters (Pre, Fine, Hepa)	American Air Filter/ Camfil/ Thermodyne/ Freudenberg/ Equivalent
30.	Flexible Duct	Twiga/ RuskinTitus/ Kimmco/ Sevenstar/ Supreme/ Equivalent
31.	Flow switch	Rapidcool/ Siemens/ Anergy/ Honeywell/ Danfoss/ Equivalent
32.	FRP Material	Reichhold/ Equivalent
33.	Fibre glass insulation	Owens corning/ U. P. Twiga/ Equivalent
34.	Fire Paint	Flamebar/ AMEETUFF/ 3M/ promat/ JAY & CO-Cischem/ Equivalent
35.	G.I. Pipes	SAIL/ Tata/ Jindal(HISSAR)/ Equivalent
36.	G.I. Sheets	SAIL/ Tata/ Jindal/ Equivalent
37.	Grills/ Diffusers/ Fire Dampers/ Louvers/ Volume Control Dampers/ Back Draft Dampers	Systemair/ Caryaire/ Cosmos/ Trox/ Greenheck/ Equivalent

  
 Superintendent (General)  
 Project Implementation Unit  
 Gandhinagar



Sr No.	Material/ Item	Make
38.	GSS Factory Fabricated Ducts/ Duct Flanges	Zeco/ Ductofab/ Maruti/ Equivalent
39.	Heat Pump	York/ Trane/ Daikin/ Bluebox/ Kehems/ Equivalent
40.	Inline Fans	Systemair/ Kruger/ Greenheck/ Humidin/ Nicotra/ Air Flow / Wolter/Caryaire/ Equivalent
41.	M.S. Pipes	(i)SAIL/ Tata/ Jindal(HISSAR) (below 350 mm dia)/ Equivalent (ii) SAIL/ Tata/MSL(above 350 mm dia)/ Equivalent
42.	M.S. Sheets	SAIL/ Tata/ Jindal/ Equivalent
43.	Motorized Actuator ForValves& Damper	Belimo/ Siemens/ Johnson Controls/ Equivalent
44.	Motorized Butterfly valves	Belimo/ Siemens/ Johnson controls/ Advance/ Equivalent
45.	Induction Motors	ABB/ Siemens/ CGL/ Havells/ Equivalent
46.	Ozone Generator	Ultrafresh/ Eltech/ Omniscient/ Chemotronic/ Ruks engineers ltd/ Equivalent
47.	PIBC Valves	Danfoss/ Siemens/Belimo/ Flowcon/ Equivalent
48.	Plug Fans	Ziehlabegg/ Kruger/ Nicotra/ Greenheck/ Systemair/Wolter/ Punker/ Equivalent
49.	Pot Strainer	Advance/ Honeywell/ Emerald/ SANT/ SM/ Sandhu/ Equivalent
50.	Precision AC	Emerson/ Bluebox/ stulz/ Equivalent
51.	Pressure Gauge	Fiebig/ H.Guru/ Emerald/ Dwyer/ Waree/ Equivalent
52.	Pressure Relief Dampers	Trox/ Systemair/ Cosmos/ Caryaire/ Airflow Engineers/ Equivalent
53.	Pressurization Unit	Xylem/ Armstrong/ Reflex/ Sevcon/ Emerald/ Anergy/ Equivalent
54.	Propeller Fans	Kruger/ Greenheck/ Caryaire/ Systemair/ Crompton/Nicotra/Air Flow/ Wolter/ Equivalent
55.	Puff pipe support	Malanpur/ Lloyd/ Beardsell/ Equivalent

  
 Superintendent (Electrical)  
 Project Implementation Unit  
 Gandhinagar

Sr No.	Material/ Item	Make
56.	Preinsulated Pipes	Alaska / Logstor / Seven Star / Perma Pipe
57.	PVC Eliminators	Muntermz/ BKBextrusions/ D.P. Engineers/ Enviro Tech/ Equivalent
58.	PVC Pipes	Finolex/ Prince/ Supreme/ Ashirwad/ Astral/ Equivalent
59.	Refrigerant Piping	Mandev/ Mexflow/ Rajco/ Hariom/ RR Kabel/ Equivalent
60.	Rock Wool insulation	Roxul-Rockwool/ Rockwoolindia/ Lloyd/ Owens corning/ Equivalent
61.	Spiral Round/ Oval ducts	GPSpira/ Dustech/ SpiralTubes/ Asawa/ Equivalent
62.	Split/ Window AC	Carrier/ Daikin/ Hitachi/ Mitsubishi/ Blue Star/Voltas/Lloyd/ Equivalent
63.	Starbond/ Lag Protective Coating	Paramount polytreat/ Pidilite/ Equivalent
64.	Thermometers	Feibig/ H.Guru/ Emerald/ Dwyer/ Waree/ Equivalent
65.	Tube Axial flow Fans & Jet fan	Kruger / Greenheck/ Airflow / Dynair / Systemair / Nicotra/ Equivalent
66.	'TF' Quality expanded polystyrene	Beardsell/ Styrene/ Cooline/ Equivalent
67.	Ultrasonic/ Electromagnetic Flow meter	ABB/ Siemens/ Emerson/ Kamstrup/ Virtec/ Equivalent
68.	Ultrasonic Humidifier	Carel/ Daspas/ Radipcool/ Stulz/ Equivalent
69.	UV lamp	ALFAA UV/ Sanuvax/ Ruks / ULTRA pure / Honeywell/ Bonphul/ VS enviro/ Eflow/ Equivalent
70.	UVGI	ALFAA UV/ Aeropure/ Sanuvax/ Ruks / TLTRA pure / Honeywell/ ULTRA pure / Bonphul / VS enviro/ Eflow/ Equivalent
71.	Vane Axial flow Fans	Kruger/ Greenheck/ Systemair/Nicotra
72.	Variable frequency drive	ABB/ Allenbradley/ Danfoss/ Siemens/ Schneider/ L & T/ Equivalent
73.	VAV/ CAV Boxes	Trox/ Trane/ JohnsonControls/ Honeywell/ Systemair/ Cosmos/ Carryaire/ Equivalent
74.	Flexible Coupling	Victaulic/ Tyco/ Dunlop/ Easyflex/ Equivalent

Superintending Engineer (Electrical)  
Project Implementation Unit  
Gandhinagar

Sr No.	Material/ Item	Make
75.	Water Pumps	Armstrong/ Xylem/ Grundfos/ Wilo/ Equivalent
76.	Welding Rods	Advani/ L&T/ ESAB/ Equivalent
77.	Steel Wire Rope Support	Gripple / Conklin / HILTI / Mupro/ Equivalent
78.	Y-Strainers	Advance/ Honeywell/ Emerald/ SANT/ Equivalent
79.	2-way/ 3-way Modulating Valves and Thermostat	Johnson Controls/ Siemens/ Honeywell/ Danfoss/ Belimo/ T&D / Advance/ Equivalent
80.	Active/ passive Harmonic filter for VFD (Except for Chiller VFD)	L&T/ EPCOS/ Schneider/ Danfoss/ ABB/ Equivalent
81.	Ozone Generator	Indizon (Otsil) / Spantech Engineers /
82.	CO Sensor	Omicron / Jhonson control / Siemens/ Equivalent
Note:-All electrical items makes to be considered from electrical list of makes		



Superintending Engineer (Electrical)  
Project Implementation Unit  
Gandhinagar



Note: -

1. The material shall be procured as per preference of Make in India Policy and Government of India circulars as per details given below;
  - a. Notificaton of Ministry of Electronic and Information Technology, GOI vide File No.1(10)/2017-CLES dated 06.12.2019.
  - b. Ministry of Commerce and Industry order No.P-45021/2/2017-PP(BE-11) dated 04.06.2020.
  - c. Order of Govt. of India, Ministry of Finance, Department of Expenditure (PPD) F.No.6/18/2019-PPD dated 23.07.2020 and 24.07.2020. Certificate for the same as mentioned in the circular shall be furnished by the contractor/OEM.
  - d. As per Office Memorandum No.DPE/7(4)/2017-Fin.(Part-I) dated 30.07.2020 issued by Ministry of Heavy Industries & Public Enterprises, Government of India.
  - e. Gazette Notification No.CG-DL-E-07092020-221592 dated 07.09.2020 of Ministry of Electronics and Information Technology
  - f. Order of Government of India, Ministry of Commerce and Industry order No.P-45021/2/2017-PP(BE-11) dated 16.09.2020.
  - g. And any other guidelines issued in this regard by Government of India at the time of procurement of the items.
  - h. Certificate to be furnished by Agency and their specialized agency under Rule 144(XI) in the general Financial Rule 2017 of GOI, Ministry of Finance, Department of Expenditure vide Order Nos.F.18/37/2020-PPD dated 08.02.2021 and F.12/1/2021-PPD(Pt.) dated 02.03.2021.
2. **For "Equivalent Make" mentioned for the items in Make List** :- Contractor is required to submit detailed specification of the proposed make for BOQ item, which shall be considered/approved by the Engineer-in-Charge after evaluating performance of the equipment in consultation with Group of Experts. Necessary documents in support of the same shall be submitted before procurement to Engineer in Charge for approval.
3. Makes/ Models of items of all fixtures/ Items/ Materials (Subhead C1 to C22) must be got approved from the Engineer in charge well before placing any order to the OEM/ its authorized dealer. The contractor/ agency is required to submit all relevant test certificates documents and along with the proposal. The decision of Engineer-in-charge is binding in this regard and no variation is acceptable.
4. Procurement of item with aesthetic value and visibility shall be on prior approval of Architect and Engineer in charge for specfic area of application.
5. In case of products not indicated in this list, BIS/ IS marked products shall be preferred.



**Superintending Engineer (Electrical)**  
**Project Implementation Unit**  
**Gandhinagar**



**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make / MAHESHVAR TMX / 2277 /24. Date:

13 JUN 2024

To,

**MAHESHVAR ISPAT PRIVATE LIMITED.**

Survey No.1486,

Prayosha Industrial Park Varsola,

Kheda, Gujarat (387130)

**Subject: Approval of brand name of "MAHESHVAR TMX"**

- Ref.:**
- (1) **MAHESHVAR ISPAT PRIVATE LIMITED**, Letter Dated: 04/06/2024
  - (2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017.
  - (3) File Approved Dated: 12/06/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar of TMT Steel to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore Brand name of "**MAHESHVAR TMX**" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "**MAHESHVAR TMX**" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "**MAHESHVAR TMX**" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

- 1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.





**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make /JUMBO TMX/ 2370 /24. Date: 20 JUN 2024

To,

**JAI INDIA ALLOYS INDUSTRIES.**

Block 80-83, Limodra Patia,

Vill- Karanj, Mandvi Road,

Surat, Gujarat-394110

**Subject: Approval of brand name of "JUMBO TMX"**

**Ref.:** (1) JAI INDIA ALLOYS INDUSTRIES, Letter Dated: 07/02/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 29/05/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar of TMT Steel to be used for current Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "JUMBO TMX" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "JUMBO TMX" to be used shall be tested for relevant parameters and sampling as specified in relevant Standards, i.e. IS/BIS codes before use.

The approval of "JUMBO TMX" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



**N. J. Chaudhari**  
**Superintending Engineer**

Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393  
Fax: (079) 23231995

No.: PIU/ACs/Approval Make /Flush Door /Holywood / 4056 /24.

Date: 13 SEP 2024

To,  
**HOLYWOOD INDUSTRIES,**  
Survey No.307-P3, NH-27,  
Ravapar Nabi, Morbi-363642,  
Morbi, Gujarat

**Subject:** Approval of brand name of "HOLYWOOD INDUSTRIES" (Flush Doors).

**Ref.:** (1) HOLYWOOD INDUSTRIES, Morbi, Letter Dated: 13/08/2024.  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017.  
(3) File Approved Dated: 12/09/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Office and Hospital Furniture to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "HOLYWOOD INDUSTRIES" (Flush Doors) is hereby approved for incorporating in the list of approved brands for current construction of Health Care Structure.

The "HOLYWOOD INDUSTRIES" (Flush Doors) to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "HOLYWOOD INDUSTRIES" (Flush Doors) Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
Project Implementation Unit  
Gandhinagar

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.





**N. J. Chaudhari**

**Superintending Engineer**

**R.P.A.D.**

No.: PIU /ACs /Approval-Make List /TMT / 4179 /23.

**Date: 12 JUL 2023**

To,

**KAKA Industries Pvt. Ltd.**

**Survey No- 338 and 4,**

**G.I.D.C. ZAK, Ta. Dehgam,**

**GANDHINAGAR**

**Gujarat – (India)**

**Subject: Approval of brand name of "KAKA"**

- Ref.:**
- (1) **KAKA Industries Pvt. Ltd.** Gandhinagar, Letter Dated: 13/01/2023.
  - (2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017.
  - (3) File Approved By Committee Dated: 30/06/2023

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of WPC Door, WPC Door Frame and WPC Sheet / Board, Solid Panel door & Frame, Hollow PVC Door & Door Frame, PVC Wall & Ceiling Panels, PVC & WPC furniture, uPVC Door, Windows, Frame and Roofing Sheets, etc. to be used for current Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore Brand name of "KAKA" is hereby approved for incorporating in the list of approved brand for current construction of Health Care Structure.

The "KAKA" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "KAKA" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

- 1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



સત્યમેવ જયતે

**N. J. Chaudhari**  
Superintending Engineer

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus, Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393  
Fax: (079) 23231995

**R.P.A.D.**

જા. નં. :PIU / SE / Approval / Testing / Pvt.-Lab / 4209 /23

Date: 12 JUL 2023

પ્રતિ,

D. N. MATERIAL TESTING LAB

Tirupati Banglow No.-1,

Opp. Bopal Police Station, GALA Gymkhana Road,

South Bopal, Ahmedabad.

(Mo- 79901 05394 / 88667 15628)

વિષય: માન્ય ખાનગી મટીરીયલ ટેસ્ટીંગ લેબોરેટરીને પી.આઈ.યુ. માં નોંધણી  
પ્રમાણિત કરવા બાબત.

અનુ.: (૧) કાર્યપાકલ ઈજનેરશ્રી, મા.મ. વિભાગ, અમદાવાદનાં પત્ર ક્રમાંક જાનં.: એબી /ટેન્ડર  
/ખા. લે./૩૨૧૯/૨૦૨૩. તારીખ: ૦૪/૦૭/૨૦૨૩ અન્વયે.  
(૨) તારીખ: ૦૮/૦૬/૨૦૨૩ ની ફાઈલ નોંધ અન્વયે.

મહાશય,

જયભારત સહ, ઉપતોક્ત વિષય પરત્વે જણાવવાનું કે આપની લેબોરેટરીને N.A.B.L. દ્વારા મળેલ કેલીબ્રેશન સર્ટીને આધારે અનુસંધાન દર્શિત પત્રથી મા.મ. વિભાગ, અમદાવાદ દ્વારા મળેલ માન્યતાને ધ્યાને લઈ મંજૂરી આપવામાં આવે છે.

સદરહું D. N. MATERIAL TESTING LAB દ્વારા સંચાલીત મેટીરીયલ ટેસ્ટીંગ લેબોરેટરીની અનુ. (૧) પત્રમાં જણાવ્યા મુજબ માન્યતાનાં આદેશમાં સરકારશ્રી દ્વારા મંજૂર કરવામાં આવેલાં ટેસ્ટ તથા શરતોને આધિન, નિયત કરેલ સમય મર્યાદા સુધી એટલે કે, જે તારીખ સુધીનું NABL સર્ટીફિકેટ મળેલ હોય તે તારીખ (તારીખ:૨૧/૦૬/૨૦૨૫) અથવા તારીખ:૩૧/૧૨/૨૦૨૩ અથવા લેબોરેટરીનાં પરીક્ષણના ભાવો માટેનું ટેન્ડર મંજૂર થાય તે પૈકી, ત્રણમાંથી જે તારીખ વહેલી પૂર્ણ થતી હોય ત્યાં સુધી પ્રોજેક્ટ ઈમ્પ્લિમેન્ટેશન યુનિટ (હેલ્થ), વિભાગમાં ચાલતા કામોમાં કરાવવાનાં થતા મેટીરીયલનાં ટેસ્ટ માટે માન્યતા પ્રમાણિત કરવામાં આવે છે. તેમજ સરકારશ્રીની વખતો વખતની સૂચનાઓનો અમલ કરવાનો રહેશે.

  
અધિક્ષક ઈજનેર

પ્રોજેક્ટ ઈમ્પ્લિમેન્ટેશન યુનિટ  
ગાંધીનગર

નકલ સવિનય રવાના.

1) પ્રતિ, મુખ્ય ઈજનેરશ્રી, પી.આઈ.યુ. (હેલ્થ), ગાંધીનગર.

નકલ રવાના,

1) પ્રતિ, અધિક્ષક ઈજનેરશ્રી, પી.આઈ.યુ. (હેલ્થ) (તમામ), તરફ જાણ સારૂ.

2) પ્રતિ, કાર્યપાલક ઈજનેરશ્રી, પી.આઈ.યુ. (હેલ્થ) (તમામ), તરફ જાણ સારૂ.





**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make /Steel/ VINAYAK / 425 /24.

Date: 24 SEP 2024

To,

**VINAYAK TMT BARS PRIVATE LIMITED.**

Survey No. 35,36/1 & 37,  
Barot na Mosampur, Bayad Road,  
Post- Sampa, Dehgam-382305,  
Dehgam, Dist- Gandhinagar, Gujarat

**Subject: Approval of brand name of "VINAYAK 500 TMT"**

**Ref.:** (1) VINAYAK TMT BARS PRIVATE LIMITED, Letter Dated: 02/01/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 24/09/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar of TMT Steel to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "VINAYAK 500 TMT" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "VINAYAK 500 TMT" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "VINAYAK 500 TMT" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make / FLORATEX / 4256 /24.

Date: 24 SEP 2024

To,

**FLORATEX PAINTS & CHEMICALS.**

B/104 Sukan Residency, Mota Road,  
Near lack City, Baben 394602,  
Ta- Bardoli, Dist- Surat, Gujarat.

**Subject:** Approval of brand name of "FLORATEX" (Paints, Wall Putty & Construction Chemicals).

**Ref.:** (1) FLORATEX PAINTS & CHEMICALS, Letter Dated: 01/08/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 24/09/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Paints, Wall Putty and Construction Chemical to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "FLORATEX" is hereby approved for incorporating in the list of approved brands for construction of Health Care Structure.

The "FLORATEX" to be used shall be tested for relevant parameters and sampling as specified in relevant Standards, i.e. IS / BIS codes before use.

The approval of "FLORATEX" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

- 1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make / GYPSONIC / 4257 /24.

Date: 24 SEP 2024

To,

**GYPSONIC INDUSTREIS.**

1/1774, Khakhi Bava Street,  
Nanpura, Surat-395001,  
Gujarat.

**Subject:** Approval of brand name of "GYPSONIC" (GRG Acoustic Ceilings & Wall Panels)

**Ref.:** (1) GYPSONIC INDUSTREIS., Letter Dated: 17/05/2024

(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017

(2) File Approved Dated: 24/09/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Bathroom Fittings & Accessories to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "GYPSONIC" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "GYPSONIC" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "GYPSONIC" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
Project Implementation Unit  
Gandhinagar

**Copy Respectfully Submitted to.**

- 1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.





**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make / SIMERO-Tiles/ 4258 /24.

Date: 24 SEP 2024

To,

**SIMERO VITRIFIED PVT. LTD.**

Behind Indian oil patrol Pump,  
Morbi-Halvad Road, State Highway No.22,  
Nichi-Mandal, Morbi-363641,  
Gujarat

**Subject:** Approval of brand name of "SIMERO" (Glazed / Unglazed vitrified Tiles)

**Ref.:** (1) SIMERO VITRIFIED PVT. LTD., Letter Dated: 10/06/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 24/09/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Flooring Tiles to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "SIMERO" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "SIMERO" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "SIMERO" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make / NAKODA TMT/ 4259 /24.

Date: 24 SEP 2024

To,

**SHREE NAKODA ISPAT LIMITED.**

Near Railway Crossing, Mowa,

P.O.- saddu, Raipur,

Raipur-492014, Chhattisgarh

**Subject: Approval of brand name of "NAKODA TMT"**

**Ref.:** (1) SHREE NAKODA ISPAT LIMITED, Letter Dated: 26/02/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 24/09/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar of TMT Steel to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "NAKODA TMT" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "NAKODA TMT" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "NAKODA TMT" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make / SOMESHWAR TMT/ 4260 /24. Date: 24 SEP 2024

To,

**DHYAAVEE TMT BARS PRIVATE LIMITED.**

Survey No. 248, At- Baliyasan,  
Opp. Shanku Water Park,  
Mehsana-Ahmedabad Highway,  
Mehsana 382732, Gujarat.

**Subject: Approval of brand name of "SOMESHWAR TMT"**

**Ref.:** (1) **DHYAAVEE TMT BARS PRIVATE LIMITED**, Letter Dated: 12/12/2023  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017.  
(3) File Approved Dated: 24/09/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar of TMT Steel to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "**SOMESHWAR TMT**" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "**SOMESHWAR TMT**" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "**SOMESHWAR TMT**" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.





**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make /OUTFLOW/ 4261 /24.

Date: 24 SEP 2024

To,

**OUTFLOW INDUSTREIS.**

Plot No. 3914, W Road,  
G.I.D.C., Phase-III, Dared,  
Jamnagar-361004, Gujarat.

**Subject:** Approval of brand name of "OUTFLOW" (Bathroom Fittings & Accessories)

**Ref.:** (1) **OUTFLOW INDUSTREIS.**, Letter Dated: 13/02/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 24/09/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Bathroom Fittings & Accessories to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "OUTFLOW" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "OUTFLOW" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "OUTFLOW" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



સત્યમેવ જયતે

**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

**R.P.A.D.**

No.: PIU /ACs /Approval-Make List /GOD TMT / 4294 /23.

**Date: 18 JUL 2023**

To,  
**SHREE PARMESHWAR STEELS Pvt. Ltd.**  
**220/E, G.V.M.M., ODHAV,**  
**Ahmedabad,**  
**Gujarat – (India)**

**Subject: Approval of brand name of "GOD TMT"**

**Ref.:** (1) Shree Parmeshwar Steels Pvt. Ltd. Ahmedabad, Letter Dated: 27/06/2022  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017.  
(3) File Approved By Committee Dated: 12/07/2023

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar to be used for current Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore Brand name of "GOD TMT" is hereby approved for incorporating in the list of approved brand for current construction of Health Care Structure.

The "GOD TMT" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "GOD TMT" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.





**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make / Natural paints / 4646 /24. Date: 14 OCT 2024

To,

**NATURAL PAINTS.**

National highway-27,  
Near Swaminarayan Gurukul & Gondala Chokdi,  
Ta- Gondal, Dist- Rajkot (360311), Gujarat

**Subject:** Approval of brand name of "NATURAL PAINTS" (Paints & Wall Putty).

**Ref.:** (1) NATURAL PAINTS, Letter Dated: 13/02/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 07/10/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Paints & Wall Putty to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "NATURAL PAINTS" is hereby approved for incorporating in the list of approved brands for construction of Health Care Structure.

The "NATURAL PAINTS" to be used shall be tested for relevant parameters and sampling as specified in relevant Standards, i.e. IS / BIS codes before use.

The approval of "NATURAL PAINTS" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.





**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make / OASIS -Tiles/ 4766 /24.

Date: 15 OCT 2024

To,

**OASIS VITRIFIED PVT. LTD.**

8-A, National Highway,  
Kandla Road, Morbi-363642  
Gujarat.

**Subject:** Approval of brand name of "OASIS" (vitrified, Glazed and Ceramic)

**Ref.:** (1) OASIS VITRIFIED PVT. LTD., Letter Dated: 01/02/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 14/10/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Ceramics Tiles, Vitrified Tiles and Glazed Tiles to be used for current Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "OASIS" is hereby approved for incorporating in the list of approved brands for construction of Health Care Structure.

The "OASIS" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "OASIS" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU/ACs/Approval-Make /SAMROCK / 4934 /23.

Date: - 8 SEP 2023

To,  
**SAMROCK Chemicals (i) Ltd.**  
**Head Business Development,**  
**302, Chanakya Building, 3rd Floor,**  
**Nr. Dinesh Hall, Ashram Road,**  
**Ahmedabad – 380 009**  
Email- samrockchem@gmail.com

**Subject: Approval of brand name of "SAMROCK"**

**Ref.:** (1) **SAMROCK Chemicals (i) Ltd.** Ahmedabad, Letter Dated: 12/01/2023  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017.  
(3) File Approved Dated: 06/09/2023

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Water proofing and Construction Chemicals to be used for current Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore Brand name of "**SAMROCK**" is hereby approved for incorporating in the list of approved brand for current construction of Health Care Structure.

The "**SAMROCK**" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "**SAMROCK**" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.





सत्यमेव जयते

**S. R. Patel**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393  
Fax: (079) 23231995

No.: PIU/ACs/Approval Make /Steel /PODDAR TMT / 4935 /23.

Date: - 8 SEP 2023

To,

**S. PODDAR International (India) Pvt. Ltd.**

**1<sup>st</sup> Floor, Plot No.: 442,**

**Sector – 1 A, Gayatri Mandir Road,**

**Gandhidham, KUTCH,**

**Gujarat**

Email: spoddarpvtltd@gmail.com

**Subject: Approval of brand name of "PODDAR TMT"**

**Ref.:** (1) **S. PODDAR International (India) Pvt. Ltd.** Ahmedabad, Letter Dated: 10/04/2023.  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017.  
(3) File Approved Dated: 19/08/2023

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar of TMT Steel to be used for current Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore Brand name of "**PODDAR TMT**" is hereby approved for incorporating in the list of approved brand for current construction of Health Care Structure.

The "**PODDAR TMT**" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "**PODDAR TMT**" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

1) Superintending Engineer (All).  
2) Executive Engineer (All).





**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make /MG TMX TMT/ **4936** /23. **Date: - 8 SEP 2023**

**To,**

**MG STEEL.**

Office- 304, Eva Complex,  
Waghawadi Road, Near Gulista Ground,  
At. Bhavnagar, Ta. &, Dist.- Bhavnagar (Guj) – 364 001

**Subject: Approval of brand name of "MG TMX TMT"**

**Ref.:** (1) **MG STEEL**, BHAVNAGAR, Letter Dated: 10/08/2021  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017.  
(3) File Approved Dated: 29/08/2023

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar of TMT Steel to be used for current Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore Brand name of "**MG TMX TMT**" is hereby approved for incorporating in the list of approved brand for current construction of Health Care Structure.

The "**MG TMX TMT**" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "**MG TMX TMT**" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
**Project Implementation Unit**  
**Gandhinagar**

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.



**N. J. Chaudhari**  
**Superintending Engineer**

Commissionerate of Health  
Health, Medical Services & Medical Education  
Project Implementation Unit,  
4<sup>th</sup> Floor, RDD, NHM Building,  
Civil Hospital Campus  
Sector-12, Gandhinagar  
Phone: (079) 23231434, 23231393 Fax: (079) 23231995

No.: PIU /ACs /Approval-Make /Steel/ GAJKESARI/ 5107 /24.

Date: 28 OCT 2024

To,

**GAJKESARI STEELS AND ALLOYS PVT. LTD.**

Plot No. F-18/19, Phase- II,  
Additional MIDC, Jalna-431203,  
Jalna, Maharashtra

**Subject:** Approval of brand name of "GAJKESARI TMX"

**Ref.:** (1) GAJKESARI STEELS AND ALLOYS PVT. LTD., Letter Dated: 24/01/2024  
(2) PIU circular No.: PIU /Cell / Tender / 4741 / 2017, Dated: 21 / 11 / 2017  
(2) File Approved Dated: 19/10/2024

Project Implementation Unit Health & Family Welfare Department has reviewed the present requirements of Reinforcement bar of TMT Steel to be used for Construction of various Health Care Structures.

After carrying out the laboratory testing of representative samples, the test results are as per relevant BIS Norms. Therefore, Brand name of "GAJKESARI TMX" is hereby approved for incorporating in the list of approved brand for construction of Health Care Structure.

The "GAJKESARI TMX" to be used shall be tested for relevant parameters and sampling as specified in relevant BIS Codes.

The approval of "GAJKESARI TMX" Brand is granted for a period of three (03) years from Today. Necessary renewal procedure shall be followed by manufacture after expiry of validity period.

  
**Superintending Engineer**  
Project Implementation Unit  
Gandhinagar

**Copy Respectfully Submitted to.**

1) To D.E.E & P. S. to The Chief Engineer, P.I.U. (Health), Gandhinagar for necessary Action.

**Copy F.W.C.S.**

- 1) Superintending Engineer (All).
- 2) Executive Engineer (All).
- 3) Tender Branch. P. I. U., Gandhinagar, for necessary Action.