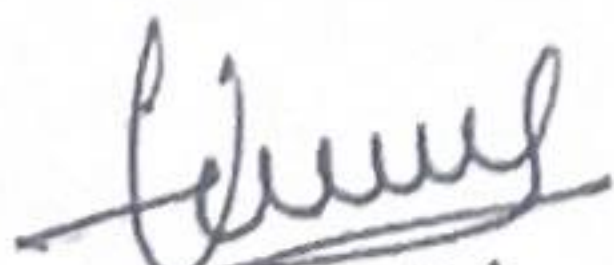



KARNAKATA NEERAVARI NIGAM LIMITED		
KAMBADAL-HOSUR TANK FILLING SCHEME		
CHANGES AT THE TIME OF TECHNICAL SANCTION		
Sl No	As per ERC Proceedings	As Per Technical Sanction
1	The Tenderer should completing the work consisting of HDPE Pipe minimum outer diameter of 280mm	The Maximum outer dia of HDPE Pipe considered in design of network is 315mm. 80% of 315mm dia is worked out to be 250mm. Same is updated in Tender Document.
2	Approximate Amount put to tender excluding GST is 35.70 Crores	<p>Approximate Amount put to tender is revised based on following conditions:-</p> <p>(i) While scrutiny of estimate, it is observed that number of Nala and Canal crossings considered in estimate are less than site conditions. Accordingly 4 number of Nala crossing and 3 number of canal crossing are additionally added.</p> <p>(ii) In Staff Quarters Estimate, M20 garde concrete rate was linked to M15 rate. After correction this rate was revised.</p> <p>(iii) In Staff Quarters estimate, rate of steel reinforcement considered in the estimate was for "all other type of works". During scrutiny, the rate is updated to "Buildings works".</p> <p>(iv) In Surge Protection work, 3rd quarter issue rates are not updated in the estimate. The same corrections were made at the time of scrutiny.</p> <p>(v) In Asphalt Road Crossing estimate, Dense bituminous macadam was considered for surface layer instead of semi dense bituminous macadam. Now it is updated.</p> <p>Because of the above changes at the time of estimate scrutiny the amount put to tender of the project is revised to 36.52 Crores.</p>


 Assistant Executive Engineer
 KNNL BRLBC Sub Division No.1
 B.R.Project


 Executive Engineer
 KNNL BRLBC Division No.4
 Bhadravathi