

ನಗರಸಭೆ, ಕಾರ್ಯಾಲಯ, ಕೊಳ್ಳೇಗಾಲ
ಚಾಮರಾಜನಗರ ಜಿಲ್ಲೆ.

<><>0<><>

ಕಾಮಗಾರಿಯ ಹೆಸರು: ಕೊಳ್ಳೇಗಾಲ ತಾ|| ಶ್ರೀರಂಗಪಟ್ಟಣ-ಮಲ್ಲೆ ಮಹದೇಶ್ವರ
ಬೆಟ್ಟದ ರಸ್ತೆ ರಾಜ್ಯ ಹೆದ್ದಾರಿ-79ರ ಸರಪಳಿ 68.70
ರಿಂದ 69.61 ಕಿ.ಮೀ ವರೆಗೆ ರಸ್ತೆ ಅಭಿವೃದ್ಧಿ ಕಾಮಗಾರಿ
(ದಾಸನಪುರ ಜಂಕ್ಷನ್ ರಿಂದ ಎನ್ ಹೆಚ್-948
ಸೇರುವ ರಸ್ತೆ (ಪಶು ಇಲಾಖೆ ಕಛೇರಿ ಹತ್ತಿರ)


>>>>>> <<<<<<

ಅಂದಾಜು ಮೊತ್ತ : ರೂ. 150.00 ಲಕ್ಷಗಳು

ಲೆಕ್ಕಶೀರ್ಷಿಕೆ : 2025-26ನೇ ಸಾಲಿನ ಮಾನ್ಯ ಮುಖ್ಯಮಂತ್ರಿಯವರ ಮೂಲ ಸೌಕರ್ಯ
ಅಭಿವೃದ್ಧಿ ಯೋಜನೆಯ ಅನುದಾನ

ತಾಂತ್ರಿಕ ವರದಿ

ಕೊಳ್ಳೇಗಾಲ ತಾ|| ಶ್ರೀರಂಗಪಟ್ಟಣ-ಮಲೈ ಮಹದೇಶ್ವರ ಬೆಟ್ಟದ ರಸ್ತೆ ರಾಜ್ಯ ಹೆದ್ದಾರಿ-79ರ ಸರಪಳಿ 68.70 ರಿಂದ 69.61 ಕಿ.ಮೀ ವರೆಗೆ ರಸ್ತೆ ಅಭಿವೃದ್ಧಿ ಕಾಮಗಾರಿ (ದಾಸನಪುರ ಜಂಕ್ಷನ್ ರಿಂದ ಎನ್ ಹೆಚ್-948 ಸೇರುವ ರಸ್ತೆ (ಪಶು ಇಲಾಖೆ ಕಛೇರಿ ಹತ್ತಿರ) (ರೂ. 150.00 ಲಕ್ಷಗಳು) ಕಾಮಗಾರಿಯನ್ನು ಕೈಗೊಳ್ಳಲು 2025-26ನೇ ಸಾಲಿನ ಮಾನ್ಯ ಮುಖ್ಯಮಂತ್ರಿಯವರ ಮೂಲ ಸೌಕರ್ಯ ಅಭಿವೃದ್ಧಿ ಯೋಜನೆಯ ಅನುದಾನದ ಅಧಿಕೃತ ಜ್ಞಾಪನ ಪತ್ರದ ಸಂ:CM/SG:01/2025-26 ದಿನಾಂಕ:25.11.2025ರ ಆದೇಶದಂತೆ ಸದರಿ ಕಾಮಗಾರಿಯ ಸ್ಥಳ ಪರಿಶೀಲಿಸಲಾಗಿ ಸರಪಳಿ 0.00 m to 220.00 m, and 450.00 m to 700.00 m, kannika parameshwari Circle From ಸರಪಳಿ 700 m to 730 m, Bank of baroda bank near peace park From chainage 855 m to 1120 m, Veterinary Hospital front side From chainage 1120 m to 1150 m chainage ರಂತೆ ಹಾಲಿ ಇರುವ ಡಾಂಬರು ರಸ್ತೆಯು ದುರಸ್ತಿಗೊಂಡಿರುವುದರಿಂದ ಸದರಿ ರಸ್ತೆಗೆ ಬಿ.ಎಂ ಹಾಗೂ ಎಸ್.ಟಿ.ಬಿ.ಸಿ ಕಾಂಕ್ರೀಟ್ ಹಾಕಲು ಅನುವುಮಾಡಲಾಗಿರುತ್ತದೆ ಹಾಗೂ Kaveri road near Bheemanagara Arch to Narayanaswamy temple From chainage 220.00 m to 450.00 m, kannika parameshwari Circle to peace park From chainage 730.00 m to 855.00 m ವರೆಗೆ ಹಾಲಿ ಇರುವ ಸಿಮೆಂಟ್ ಕಾಂಕ್ರೀಟ್ ರಸ್ತೆಯು ಹಳ್ಳ ಬಿದ್ದು ದುರಸ್ತಿಗೊಂಡಿರುವುದರಿಂದ ಸದರಿ ರಸ್ತೆಗೆ ವೇರಿಂಗ್‌ಕೋಟ್ ಅಳವಡಿಸಲು ಅನುವುಮಾಡಲಾಗಿದ್ದು, ಹಾಗೂ ಡಾಂಬರು ಮತ್ತು ಕಾಂಕ್ರೀಟ್‌ಗಳಲ್ಲಿ ಅವಶ್ಯಕತೆ ಇರುವ ಕಡೆಗಳಲ್ಲಿ ಇಂಟರ್‌ಲಾಕ್ ಅಳವಡಿಸಲು ಅನುವುಮಾಡಲಾಗಿರುತ್ತದೆ. ಸದರಿ ಅಂದಾಜು ಪಟ್ಟಿಯನ್ನು 2023-24ನೇ ಸಾಲಿನ ಕರ್ನಾಟಕ ಸರ್ಕಾರ ಲೋಕೋಪಯೋಗಿ, ಬಂದರು ಮತ್ತು ಒಳನಾಡು ಜಲಸಾರಿಗೆ ಇಲಾಖೆ, ರವರ ಏಕರೂಪಿ ದರಪಟ್ಟಿಯಂತೆ ತಯಾರಿಸಲಾಗಿದೆ. ಸದರಿ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕವಾಗಿ ಪರಿಶೀಲಿಸಿ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ಹಾಗೂ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿಯನ್ನು ನೀಡಲು ಸಲ್ಲಿಸಲಾಗಿದೆ.



ಕಿರಿಯ/ಅಭಿಯಂತರರು,
ನಗರಸಭೆ, ಕೊಳ್ಳೇಗಾಲ

ಕಾಮಗಾರಿಯ ಹೆಸರು: ಕೊಳ್ಳೇಗಾಲ ತಾ|| ಶ್ರೀರಂಗಪಟ್ಟಣ-ಮಲ್ಲೆ ಮಹದೇಶ್ವರ ಬೆಟ್ಟದ ರಸ್ತೆ ರಾಜ್ಯ ಹೆದ್ದಾರಿ-79ರ ಸರಪಳಿ 68.70 ರಿಂದ 69.61 ಕಿ.ಮೀ ವರೆಗೆ ರಸ್ತೆ ಅಭಿವೃದ್ಧಿ ಕಾಮಗಾರಿ (ದಾಸನಮರ ಜಂಕ್ಷನ್ ರಿಂದ ಎನ್ ಹೆಚ್-948 ಸೇರುವ ರಸ್ತೆ (ಪುನು ಇಲಾಖೆ ಕಛೇರಿ ಹತ್ತಿರ)

Estimated Cost :			150.00	Lakhs	ಲೆಕ್ಕಪರಿಶೀಲನೆ: 2025-26ನೇ ಸಾಲಿನ ಮಾನ್ಯ ಮುಖ್ಯಮಂತ್ರಿಯವರ ಮೂಲ ಸೌಕರ್ಯ ಅಭಿವೃದ್ಧಿ ಯೋಜನೆಯ ಅನುದಾನ				
Item No.	Description of Item of Work	Unit	No.	L	B	D	Qty	Rate	Amount
1	2	3	4	5	6	7	8	9	10
For Asphalt Road									
1	Cleaning the existing bituminous road surface including removing of binding materials and other foreign matter with wire brushes and small picks, sweeping with brooms or soft brushes and finally dusting with old gunny bags and / or compressed air, to receive bituminous treatment including cost of all materials, labour, HOM of machineries complete as per specifications. MORTH specification clause 501								
	From chainage 0.00 m to 220.00 m chainage	Sqm	1	220.00	5.50		1210.00		
	From chainage 450.00 m to 700.00 m chainage		1	250.00	6.00		1500.00		
	kannika parameshwari Circle From chainage 700 m to 730 m chainage		✓	30.00	15.00		450.00		
	Bank of baroda bank near peace park From chainage 855 m to 1120 m chainage		✓	265.00	8.00		2120.00		
	Veterinary Hospital front side From chainage 1120 m to 1150 m chainage		✓	30.00	14.00		420.00		
	Basic Rate	6.00					5700.00	6.18	35226.00
	Area specific loading 3%	0.18							
		6.18							
2	Providing and applying tack coat with RS1 Bituminous Emulsion using emulsion pressure distributor at the rate of 0.20 kg/m ² on the prepared bituminous surface cleaned with mechanical broom ((CSR vol-3 OF 2023-24, Pg-31 , I-5.3 (I))								
	From chainage 0.00 m to 220.00 m chainage	Sqm	1	220.00	5.50		1210.00		
	From chainage 450.00 m to 700.00 m chainage		1	250.00	6.00		1500.00		
	kannika parameshwari Circle From chainage 700 m to 730 m chainage		✓	30.00	15.00		450.00		
	Bank of baroda bank near peace park From chainage 855 m to 1120 m chainage		1	265.00	8.00		2120.00		
	Veterinary Hospital front side From chainage 1120 m to 1150 m chainage		✓	30.00	9.00		270.00		
							5550.00	13.39	74315.00
	Basic Rate	13.00							
	Area specific loading 3%	0.39							
		13.39							
3	Providing and laying Bituminous Macadam with 40/60 TPH capacity hot mix plant using crushed aggregates of specified grading premixed with bituminous binder VG-30 @ 3.3% by weight of mix, transported to site, laid over a previously prepared surface with mechanical paver finisher to the required grade, level and alignment and rolled as per clauses 501.6 and 501.7 to achieve the desired compaction (CSR vol-3 OF 2023-24, Pg-31 , I-5.6 (C))								
	From chainage 0.00 m to 220.00 m chainage	Cum	✓	220.00	5.50	0.05	60.50		
	From chainage 450.00 m to 700.00 m chainage		✓	250.00	6.00	0.05	75.00		
	kannika parameshwari Circle From chainage 700 m to 730 m chainage		✓	30.00	15.00	0.05	22.50		

[illegible]

Item No.	Description of Item of Work	Unit	No.	L	B	D	Qty	Rate	Amount
1	2	3	4	5	6	7	8	9	10
6	Providing and constructing un-reinforced plain cement concrete pavement, thickness as per design, over a prepared sub base, with 43 grade cement or any other type as per Clause 1501.2.2 M20 (Grade), coarse and fine aggregates conforming to IS:383:2016, maximum size of coarse aggregate not exceeding 25 mm, mixed in a concrete mixer of not less than 0.2 cum capacity and appropriate weigh batcher using approved mix design, laid in approved fixed side formwork (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the formwork as per drawing), spreading the concrete with shovels, rakes, compacted using needle, screed and plate vibrators and finished in continuous operation including construction joints, primer, sealant, curing of concrete slabs for 14-days, and water finishing to lines and grade as per drawing and technical specification clause 1501 with all lead, lifts, loading & unloading charges, cost and conveyance of all materials, labour, equipments etc., complete, as per the directions of the Engineer-in-charge of the work. (CSR VOL-3 OF 2023-24, Pg-148, I-16.27)								
	Kaven road near Bheemanagara Arch to Narayanaswamy temple From chainage 220.00 m to 450.00 m chainage	Cum	1	230.00	8.00	0.15	276.00		
	kannika parameshwari Circle to peace park From chainage 730.00 m to 855.00 m chainage (Veringcote)		1	125.00	7.00	0.15	131.25		
	Basic Rate	6271.00					407.25	6459.13	2630481.00
	Area specific loading 3%	188.13							
		6459.13							
7	Dismantling the damaged or collapsed Machinehole, conical in shape, and reconstructing the same for the same dimensions, with machine made wire cut brick in CM 1:4 with ordinary portland cement etc. as per design and specifications. The existing ring, cover and CC bedding to be used. For 1.2M dia (CSR VOL-5 OF 2023-24, Pg-197, I No: 16.25)								
	For Machinehole of 1.2M dia and 1.0 M depth the rate is = $1.03 \times 15574 = \text{Rs } 16041.22$								
	Basic Rate	15574.00							
	Area specific loading 3%	467.22							
		16041.22							
	For raising machinehole by 0.30m height	Each					32	4812.37	153996.00
FOR INTERLOCK WORKS									
8	Construction of Embankment by excavating the available approved Gravel/Murum deposited at a place or borrow pits during or prior excavation with all lifts and lead, transportation to site, spreading, grading to required slope and compacting to meet the requirement complete as per specifications, including cost of labour, rolling, water, all materials, usage & all other appurtenances required to complete the work. (PWD SR 2023-24 Vol:1 P.NO.7 I.No:3.1)								
	0.00 m to 220.00 m								
	From chainage 0.00 m to 30.00 m chainage	Cum	2	30.00	5.00	0.30	90.00		
	From chainage 30.00 m to 60.00 m chainage	Cum	2	30.00	4.00	0.10	24.00		
	From chainage 60.00 m to 220.00 m chainage Right side	Cum	1	160.00	3.50	0.10	56.00		
	From chainage 450.00 m to 700.00 m chainage	Cum	2	250.00	1.50	0.10	75.00		
	Bank of baroda bank near peace park From chainage 855 m to 1120 m chainage	Cum	2	260.00	2.00	0.10	106.00		
	Veterinary Hospital front side From chainage 1120 m to 1150 m chainage	Cum	2	30.00	3.00	0.10	18.00		
	Basic Rate	474.00					369.00	488.22	180153.00
	Area specific loading 3%	14.22							


Item No.	Description of Item of Work	Unit	No.	L	B	D	Qty	Rate	Amount
1	2	3	4	5	6	7	8	9	10
		488.22							
9	Providing, laying, spreading and compacting graded stone aggregate to wet mix macadam specification including premixing the Material with water at OMC in mechanical mix plant carriage of mixed Material by tipper to site, laying in uniform layers with paver/grader in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density(CSR OF vol-3 2023-24, Pg-26, I-4.17)								
	0.00 m to 220.00 m								
	From chainage 0.00 m to 30.00 m chainage	Cum	2	30.00	5.00	0.10	30.00		
	From chainage 30.00 m to 60.00 m chainage	Cum	2	30.00	4.00	0.10	24.00		
	From chainage 60.00 m to 220.00 m chainage Right side	Cum	1	160.00	3.50	0.10	56.00		
	From chainage 450.00 m to 700.00 m chainage	Cum	2	250.00	1.50	0.10	75.00		
	Bank of baroda bank near peace park From chainage 855 m to 1120 m chainage	Cum	2	265.00	2.00	0.10	106.00		
	Veterinary Hospital front side From chainage 1120 m to 1150 m chainage	Cum	2	30.00	3.00	0.10	18.00		
	Basic Rate	2559.00					309.00	2635.77	814453.00
	Area specific loading 3%	76.77							
		2635.77							
10	Providing and laying 80mm thick factory made precast M-30 grade Cement Concrete Paver Block as per IRC SP 63:2018 & IS 15658 for Commercial Traffic Axle load repetitions upto 10MSA & for Residential Streets of approved shape and colour, laid in required pattern and including over 40mm thick compacted bed of coarse sand, filling the joints with fine sand etc. all complete as per the direction of Engineer-in-charge. (WMM/WBM Base to be paid separately as per relevant technical specification) Precast Cement Concrete Interlocking Blocks (CSR vol-3 OF 2023-24, Pg-51, I-6.8.2)								
	From chainage 0.00 m to 30.00 m chainage	Sqm	2	30.00	5.00		300.00		
	From chainage 30.00 m to 60.00 m chainage		2	30.00	4.00		240.00		
	From chainage 60.00 m to 220.00 m chainage Right side		1	160.00	3.50		560.00		
	From chainage 450.00 m to 700.00 m chainage		2	250.00	1.50		750.00		
	Bank of baroda bank near peace park From chainage 855 m to 1120 m chainage		2	265.00	2.00		1060.00		
	Veterinary Hospital front side From chainage 1120 m to 1150 m chainage		2	30.00	3.00		180.00		
	Basic Rate	1161.00					3090.00	1195.83	3695115.00
	Area specific loading 3%	34.83							
		1195.83							
11	Supplying and fixing M15 grade precast cement concrete Kerb stones for Roadway, Sidewalls and gutters fixed with CM 1:3 fixed and finished in line as per direction of Engineer in charge. (The cost of PCC shall be paid extra) 300 x 200 x 150 mm Kerb Stone (CSR vol-3 OF 2023-24, Pg 74, I-8.42.8)								
	Kerb stones	Cum	1	130.00			130.00		
	Basic Rate	336.00					130.00	346.08	44990.00
	Area specific loading 3%	10.08							
		346.08							

Item No.	Description of Item of Work	Unit	No.	L	B	D	Qty	Rate	Amount
1	2	3	4	5	6	7	8	9	10
12	Providing and laying in position plain cement concrete for levelling course for all works in foundation. The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed, laid in layers not exceeding 150 mm thickness, well compacted using plate vibrators, including all lead & lifts, cost of all materials of quality, labour, Usage charges of machineries, curing, and all the other appurtenances required to complete the work as per technical specifications. (The cost of steel reinforcement & formwork shall be paid separately Mix 1:4:8 Using 40 mm nominal size graded crushed coarse aggregates (CSR vol-1 OF 2023-24, Pg-15, I-2.1.2)								
	Kerb stones	Cum	1	130.00	0.35	0.10	4.55		
	Basic Rate	5607.00					4.55	5775.21	26277.00
	Area specific loading 3%	168.21							
		5775.21							
FOR RCC DRAIN WORKS									
13	Earth work excavation by manual means for drains, canals, waste weir, draft, approach channels, key trenches, foundation of bridges and such similar works in all kinds of soils, as per drawing and technical specifications, including setting out, shoring, strutting, barricading, caution lights, removal of stumps and other deleterious matter, excavated surface leveled and sides neatly dressed disposing off the excavated stuff or sorting & stacking the selected stuff for reuse in a radius of 50 m and lift upto 1.5 m including cost of labour, tools & other appurtenances required to complete the work (CSR OF 2023-24, Pg-5, I-1.4.1)								
	for Drains	Cum	1	150.00	0.90	0.90	121.50		
	Calvert		2	8.00	1.30	1.05	21.84		
	Basic Rate	242.00					143.34	249.26	35729.00
	Area specific loading 3%	7.26							
		249.26							
14	Removal of Unserviceable Soil with Disposal upto a suitable distance as directed by the Engineer incharge of work (PWD SR 2023-24 Vol:3 P.NO.17 I.No:3.1)								
		Cum					143.34	87.55	12549.00
	Basic Rate	85.00							
	Area specific loading 3%	2.55							
		87.55							
15	Providing rubble and sand filling in layers of 250 to 300 mm including cost of all materials, machinery, labour, watering, ramming etc., complete with all lead and all lifts. (2023 24 Volume -4, Page No. 48, Item No. (WRD)3.10)								
	for Drains	Cum	1	150.00	0.90	0.20	27.00		
	Calvert		2	8.00	1.30	0.25	5.20		
							32.20	2163.00	69649.00
	Basic Rate	2100.00							
	Area specific loading 3%	63							
		2163.00							
16	Construction of Embankment by excavating the available approved Gravel/Murum deposited at a place or borrow pits during or prior excavation with all lifts and lead, transportation to site, spreading, grading to required slope and compacting to meet the requirement complete as per specifications, including cost of labour, rolling, water, all materials, usage & all other appurtenances required to complete the work. (PWD SR 2023-24 Vol:1 P.NO.7 I.No:3.1)								
	for Drains Sides		1	150.00	0.10	0.50	7.50		
	Calvert sides		4	8.00	0.10	0.50	1.60		
	Basic Rate	474.00					9.10	488.22	4443.00
	Area specific loading 3%	14.22							
		488.22							

Item No.	Description of Item of Work	Unit	No.	L	B	D	Qty	Rate	Amount
1	2	3	4	5	6	7	8	9	10
17	Providing and laying in position plain cement concrete for levelling course for all works in foundation. The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed, laid in layers not exceeding 150 mm thickness, well compacted using plate vibrators, including all lead & lifts, cost of all materials of quality, labour, Usage charges of machineries, curing, and all the other appurtenances required to complete the work as per technical specifications. (The cost of steel reinforcement & formwork shall be paid separately Mix 1:4:8 Using 40 mm nominal size graded crushed coarse aggregates (CSR vol-1 OF 2023-24, Pg-15, I-2.1.2)								
	for Drains	Cum	1	150.00	0.90	0.10	13.50		
	Calvert		2	8.00	1.30	0.10	2.08		
	Basic Rate	5607.00					15.58	5775.21	89978.00
	Area specific loading 3%	168.21							
		5775.21							
18	Providing and laying in position Cement Concrete for all Sub structures of building, Irrigation works, Sub structure works of bridges, Drain works & other parallel works from 0.50m to 3.50 m height. The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed with super plasticisers, laid in layers, well compacted using needle vibrators, providing weep holes wherever necessary, including all lead & lifts, cost of all materials of quality, confirming to the requirements of relevant IS codes, labour, Usage charges of machinery, curing and all other appurtenances required to complete the work as per technical specifications, M20 Design Mix Using 20 mm nominal size graded crushed coarse aggregates (CSR VOL-1 OF 2023-24, Pg-16, I-2.4.2)								
	for Drains Bottom & sides								
	for Drains	Cum	1	150.00	0.90	0.10	13.50		
	Calvert Bottom		2	8.00	1.30	0.15	3.12		
	for Drains sidewall		2	150.00	0.15	0.50	22.50		
	Basic Rate	6221.00					39.12	6407.63	250666.00
	Additional for Area weightage 3%	186.63							
		6407.63							
	Calvert sidewall		4	8.00	0.25	0.50	4.00		
	Coverign slab	6221.00	2	8.00	1.10	0.25	4.40		
	Basic Rate	6631.00					8.40	9220.41	77451.00
	Additional for Area weightage 3%	198.93	186.63					8650.30	72663.00
		6829.93	6407.63						
	Additional for formwork 35%	2390.48	2242.67						
		9220.41	8650.30						
19	Supplying, fitting and placing TMT FE 550 / 550D Steel Reinforcement including cost of all materials, machinery, labour, cleaning, straightening, cutting, bending, hooking, laping/welding joints, tying with binding wire / soft annealed steel wire and other ancillary operations complete as per drawing and technical specification. Buildings (PWD Vol-I SR 2023-24, Item No. 2.11a, Page No. 18)								
	Main 10dia	Tonne	750.00	3.30	0.62	1527.08			
	Distn 8dia		13.00	150.00	0.395	770.25			
						900.00			
						3197.33			
	Basic Rate	80195.00				3.20	Tonne	82600.85	264323.00
	Area specific loading 3%	2405.85							
		82600.85							

Item No.	Description of Item of Work	Unit	No.	L	B	D	Qty	Rate	Amount
1	2	3	4	5	6	7	8	9	10
20	Providing and laying 100mm thick pre-cast cover slabs over Road side drains / utility ducts / Rain water harvesting pit of width not exceeding 1000 mm using M20 concrete reinforced with TMT bars Fe 550 @ 6kg/ m ² , slabs jointed in CM 1:3 proportion and nicely finished including providing holes in the Cover slabs wherever necessary for easy drain- age of surface water including of labour, materials, scaffolding, usage of machinery, curing, lead and lift charges etc. Complete. (CSR VOL-2 OF 2023-24, Pg-177, I-17.14)								
		Sqm	1	320.00	0.80		256.00		
	Basic Rate	1170.00					256.00	1205.10	308506.00
	Area specific loading 3%	35.10					46.40		55917.00
		1205.10							
21	Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads @ 250 g/m ² area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35:2015.The finished surface to be level, uniform and free from streaks and holes.								
	Basic Rate	530.00	3	1150.00	0.15		517.50	545.90	282503.00
	Area specific loading 3%	15.90							
		545.90							12700380.00
	SUB Total								12700515.00
	GST @ 18%								2286069.00
	Miscellaneous charges								13552.00
	Total Amount								15000000.00

(Rupees One Crore Fifty lakh only)


Junior Engineer
CMC Kollegal


Assistant Executive Engineer
CMC Kollegal


Municipal Commissioner
CMC Kollegal


Executive Engineer
District Urban Development Cell
Chamarajanagar District


ತಾಂ.ಮಂ.ಸಂಖ್ಯೆ: 180 ದಿನಾಂಕ: 02.03.2026

ಅಂದಾಜು ಬೆಲೆ ರೂ. 1,50,00,000/-

ಅಕ್ಕ ರೂ. 2,00,00,000 ರಿಂದ ಅಕ್ಕ ರೂ. 1,50,00,000


ಅಕ್ಕ ರೂ. 2025-26ನೇ ಸಾಲಿನ ಮುಖ್ಯ ಮಂಡಳಿ ಸಂಖ್ಯೆ 1800/2025-26

ಸಿ.ಎಂ.



ಅಧಿಕಾರಿ ಅಧೀನಾಧಿಕಾರಿ
ಮೈಸೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ಮೈಸೂರು


ಕೊಳ್ಳೇಗಾಲ ತಾ|| ಶ್ರೀರಂಗಪಟ್ಟಣ-ಮಲ್ಲೇ ಮಹದೇಶ್ವರ ಬೆಟ್ಟದ ರಸ್ತೆ ರಾಜ್ಯ ಹೆದ್ದಾರಿ-೭೯ರ ಸರಪಳಿ ೬೮.೭೦ ರಿಂದ ೬೯.೬೦ ಕಿ.ಮೀ ವರೆಗೆ ರಸ್ತೆ ಅಭಿವೃದ್ಧಿ ಕಾಮಗಾರಿ (ದಾಸನಮರ ಜಂಕ್ಷನ್ ರಿಂದ ಎನ್ ಹೆಚ್-೯೪೮ ಸೇರುವ ರಸ್ತೆ (ಪಶು ಇಲಾಖೆ ಕಛೇರಿ ಹತ್ತಿರ)

Cross section of Deck Slab Culvert

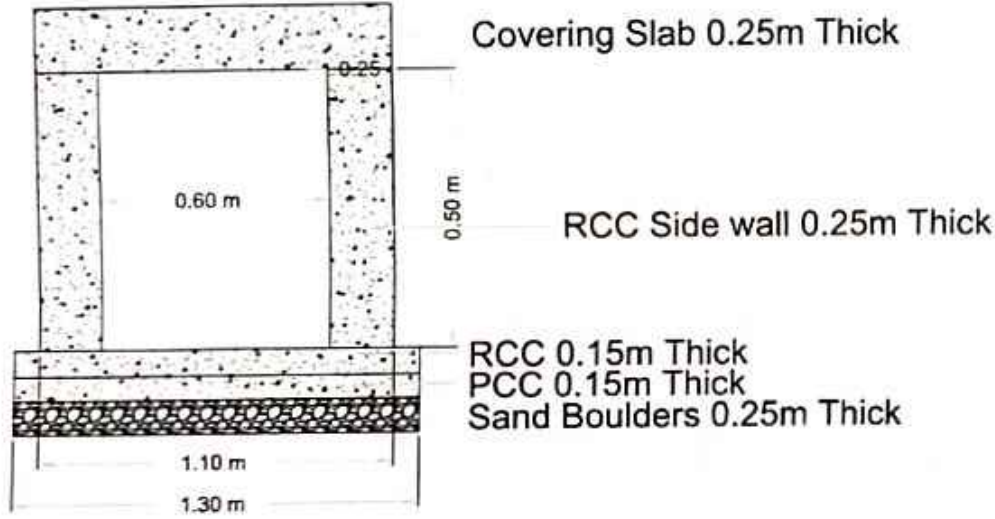

CROSS SECTION OF CC DRAIN

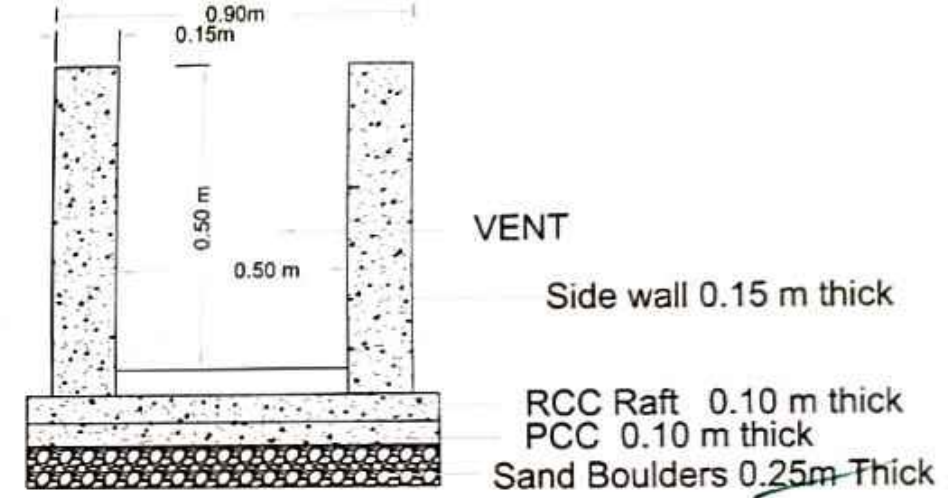


Section officer
CMC kollegala


Assistant Executive Engineer
CMC Kollegal,


Commissioner,
CMC Kollegal

ಕರ್ನಾಟಕ ಸರ್ಕಾರ

ಸಂಖ್ಯೆ:ಆಇ 340 ಆಕೋ-2/2025

ಕರ್ನಾಟಕ ಸರ್ಕಾರದ ಸಚಿವಾಲಯ
ವಿಧಾನ ಸೌಧ
ಬೆಂಗಳೂರು, ದಿನಾಂಕ:01-09-2025

ಇವರಿಂದ:-

ಸರ್ಕಾರದ ಪ್ರಧಾನ ಕಾರ್ಯದರ್ಶಿ
ಆರ್ಥಿಕ ಇಲಾಖೆ
ವಿಧಾನ ಸೌಧ

RPAD

ಇವರಿಗೆ:-

ಜಿಲ್ಲಾಧಿಕಾರಿಗಳು,
ಜಿಲ್ಲಾಧಿಕಾರಿಗಳ ಕಾರ್ಯಾಲಯ,
ಜೋಡಿ ರಸ್ತೆ,
ಚಾಮರಾಜನಗರ - 571313.

ಮಾನ್ಯರ,

ವಿಷಯ: ಮುಖ್ಯಮಂತ್ರಿಯವರ ಮೂಲಸೌಕರ್ಯ ಅಭಿವೃದ್ಧಿ ಯೋಜನೆಯಡಿ (CMINDP) ಅಭಿವೃದ್ಧಿ ಕಾಮಗಾರಿಗಳಿಗೆ ಅನುಮೋದನೆ ನೀಡುವ ಕುರಿತು.

- ಉಲ್ಲೇಖ: 1. ಸರ್ಕಾರದ ಆದೇಶ ಸಂಖ್ಯೆ: ಆಇ 234 ಆಕೋ-2 2025 ದಿನಾಂಕ:03-06-2025
2. ತಿದ್ದುಪಡಿ ಆದೇಶ ಸಂಖ್ಯೆ: ಆಇ 234 ಆಕೋ-2 2025 ದಿನಾಂಕ:05-07-2025
3. ಮಾನ್ಯ ಶಾಸಕರುಗಳು ಮಾನ್ಯ ಮುಖ್ಯಮಂತ್ರಿಯವರ ಮೂಲಸೌಕರ್ಯ ಅಭಿವೃದ್ಧಿ ಯೋಜನೆ ವಿಶೇಷ ಅನುದಾನಗಾಗಿ ಕೋರಿರುವ ಪ್ರಸ್ತಾವನೆಗಳು.

.....

ಮೇಲ್ಕಂಡ ವಿಷಯಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ, ಉಲ್ಲೇಖ(1) ಮತ್ತು (2)ರ ಆದೇಶಗಳಲ್ಲಿ ಯೋಜನೆಯ ಮಾರ್ಗಸೂಚಿಗಳನ್ನು ಹೊರಡಿಸಲಾಗಿದ್ದು, ಈ ಯೋಜನೆಯಡಿ ಚಾಮರಾಜನಗರ ಜಿಲ್ಲೆಯ ವಿಧಾನಸಭಾ ಕ್ಷೇತ್ರಗಳಿಗೆ ವಿವಿಧ ಇಲಾಖೆಗಳಡಿ ಈ ಕೆಳಕಂಡ ಅನುದಾನದಲ್ಲಿ, ಅಭಿವೃದ್ಧಿ ಕಾಮಗಾರಿಗಳನ್ನು ಕೈಗೆತ್ತಿಕೊಳ್ಳಲು ಮಾನ್ಯ ಮುಖ್ಯಮಂತ್ರಿಯವರು ಅನುಮೋದನೆ ನೀಡಿರುತ್ತಾರೆ.

(ರೂ.ಕೋಟಿಗಳಲ್ಲಿ)

ಕ್ರ. ಸಂ	ಇಲಾಖೆ	ವಿಧಾನಸಭಾ ಕ್ಷೇತ್ರಗಳು	
		ಕೊಳ್ಳೆಗಾಲ	ಗುಂಡ್ಲುಪೇಟೆ
1	ಲೋಕೋಪಯೋಗಿ	22.00	12.50
2	ಗ್ರಾಮೀಣಾಭಿವೃದ್ಧಿ ಮತ್ತು ಪಂಚಾಯತ್ ರಾಜ್	24.70	20.00
3	ನಗರಾಭಿವೃದ್ಧಿ	1.50	5.00
4	ಶಾಲಾ ಶಿಕ್ಷಣ ಮತ್ತು ಸಾಕ್ಷರತಾ	1.50	...
5	ಹಿಂದುಳಿದ ವರ್ಗಗಳ ಕಲ್ಯಾಣ	0.30	8.00
6	ಮುಜರಾಯಿ	...	4.50
	ಒಟ್ಟು ಮೊತ್ತ	50.00	50.00

2

- తమ, విశ్వాసి,

(ಹೊನ್ನಲಿಂಗಪ್ಪ ಮೈಬಿ.)
ವಿಶೇಷಾಧಿಕಾರಿ ಹಾಗೂ ಪದನಿಮಿತ್ತ
ಸರ್ಕಾರದ ಉಪ ಕಾರ್ಯದರ್ಶಿ
ಆರ್ಥಿಕ ಇಲಾಖೆ
(ಲೋಕೋಪಯೋಗಿ ಆರ್ಥಿಕ ಕೋಶ)