

ಪುರಸಭೆ ಕಾರ್ಯಾಲಯ, ಮಹಾಲಿಂಗಪುರ.

ಜಿ|| ಬಾಗಲಕೋಟೆ

ತಾ|| ರಬಕವಿ-ಬನಹಟ್ಟಿ

- ಕಾಮಗಾರಿಯ ಹೆಸರು : ರಬಕವಿ-ಬನಹಟ್ಟಿ ತಾಲ್ಲೂಕಿನ ಮಹಾಲಿಂಗಪುರ ವಾಸವಿ ಕಲ್ಯಾಣ
ಮಂಟಪ ರಸ್ತೆ ಡಾಂಬರೀಕರಣ ಮಾಡುವುದು(400ಮೀಟರ)
- ಅಂದಾಜು ಪತ್ರಿಕೆ ಮೊತ್ತ : ರೂ. 23.00ಲಕ್ಷ
- ಶೀರ್ಷಿಕೆ : ಸನ್ 2025-26ನೇ ಸಾಲಿನ ಮುಖ್ಯಮಂತ್ರಿಯವರ ಅಭಿವೃದ್ಧಿ
ಯೋಜನೆಯಡಿ(CMIDP)

ಪುರಸಭೆ, ಮಹಾಲಿಂಗಪುರ.

ತಾ|| ರಬಕವಿ-ಬನಹಟ್ಟಿ

ಜಿ|| ಬಾಗಲಕೋಟೆ.


ಮುಖ ಪುಟ.

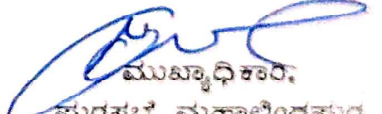
ಫಾರಂ ನಂ. ಪಿ.ಡಬ್ಲ್ಯೂ.ಡಿ -62.

ವಿಭಾಗ	:	ಪುರಸಭೆ ಕಾರ್ಯಾಲಯ, ಮಹಾಲಿಂಗಪುರ.
ಶೀರ್ಷಿಕೆ	:	ಸನ್ 2025-26ನೇ ಸಾಲಿನ ಮುಖ್ಯಮಂತ್ರಿಯವರ ಅಭಿವೃದ್ಧಿ ಯೋಜನೆಯಡಿ(CMIDP)
ಪ್ರಧಾನ ಶೀರ್ಷಿಕೆ	:	ಸನ್ 2025-26ನೇ ಸಾಲಿನ ಮುಖ್ಯಮಂತ್ರಿಯವರ ಅಭಿವೃದ್ಧಿ ಯೋಜನೆಯಡಿ(CMIDP)
ಅಂದಾಜು ಪತ್ರಿಕೆ ವೆಚ್ಚ ರೂ.	:	ರೂ. 23.00ಲಕ್ಷ
ಅಡಳಿತಾತ್ಮಕ ಮಂಜೂರಿ	:	ಮಾನ್ಯ ಜಿಲ್ಲಾಧಿಕಾರಿಗಳ ಕಾರ್ಯಾಲಯ ಬಾಗಲಕೋಟೆ ಇವರ ಪತ್ರ ಕ್ರಮಾಂಕ ಕಂ.ಇ/ಜಿ.ಬಾ/CMIDP/ಸಿಆರ್/2025-26 ದಿನಾಂಕ : 11/12/2025
ಕಾಮಗಾರಿ ಹೆಸರು	:	ರಬಕವಿ-ಬನಹಟ್ಟಿ ತಾಲ್ಲೂಕಿನ ಮಹಾಲಿಂಗಪುರ ವಾಸವಿ ಕಲ್ಯಾಣ ಮಂಟಪ ರಸ್ತೆ ಡಾಂಬರೀಕರಣ ಮಾಡುವುದು(400ಮೀಟರ್)
ಅಂದಾಜು ಪತ್ರಿಕೆ ತಯಾರಿಸಿದವರು	:	ಶ್ರೀ ಆರ್ ಎಸ್ ಚವ್ವಾಣ ಕಿರಿಯ ಅಭಿಯಂತರರು
ಅಂದಾಜು ಪತ್ರಿಕೆಯನ್ನು ಪರಿಶೀಲನೆ ಮಾಡಿದವರು.	:	ಶ್ರೀ ವಿಠಲ ಮಾಶ್ಯಾಳ ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು ಜಿಲ್ಲಾ ನಗರಾಭಿವೃದ್ಧಿ ಕೋಶ ಬಾಗಲಕೋಟೆ

|| ಸಾಮಾನ್ಯ ವಿವರಣೆ ||

ಸನ್ 2025-26ನೇ ಸಾಲಿನ ಮುಖ್ಯಮಂತ್ರಿಯವರ ಅಭಿವೃದ್ಧಿ ಯೋಜನೆಯಡಿ(CMIDP)ಯಲ್ಲಿ ಸಾರ್ವಜನಿಕರ ಹಿತದೃಷ್ಟಿಯಿಂದ ಕಾಮಗಾರಿಗಳನ್ನು ಸನ್ 2023-24ನೇ ಸಾಲಿನ ಲೋಕೋಪಯೋಗಿ ಇಲಾಖೆಯ ದರದ ಪ್ರಕಾರ ಕಾಮಗಾರಿಗೆ ಬೇಕಾಗುವ ಅವಶ್ಯಕ ಐಟಂಗಳನ್ನು ತೆಗೆದುಕೊಳ್ಳಲಾಗಿದೆ.


 ಕಿರಿಯ ಅಭಿಯಂತರರು
 ಪುರಸಭೆ, ಮಹಾಲಿಂಗಪುರ.


 ಮುಖ್ಯಾಧಿಕಾರಿ,
 ಪುರಸಭೆ ಮಹಾಲಿಂಗಪುರ.

TOWN MUNICIPAL COUNCIL MAHALINGAPUR

ಅಂದಾಜು ಪತ್ರಿಕೆ

ಕಾಮಗಾರಿಯ ಹೆಸರು: ರಬರವಿ-ಬನಹಟ್ಟಿ ಅಲ್ಲೂಕಿನ ಮಹಾಲಿಂಗಪುರ ವಾಸವಿ ಕಲ್ಯಾಣ ಮಂಟಪ ರಸ್ತೆ ಡಾಂಬರೀಕರಣ
ಮಾತೃಮಾ(400ಮೀಟರ್)

Estimated										23.00		Lakhs	
Sl. No	Details								Qty	Unit	Rate	Amount	
1	Loosening, leveling and Compacting original ground supporting embankment to facilitate placement of first layer of embankment, scarified to a depth of 150 mm, mixed with water at OMC and then compacted by rolling so as to achieve minimum dry density as given in Table 300-2 for embankment construction. (PWD SR 2023-24 Vol-3 , P.No -17 ,I No - 3.7)												
	1	x	400.00	x	4.00	x	0.10	=	160.00				
									=	160.00	Cum	105.00	16800.00
2	Construction of sub-grade and earthen shoulders with approved material obtained from borrow pits with all lifts & leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of table No. 300-2 (PWD SR 2023-24 Vol-3 , P.No -17 ,I No - 3.6)												
	1	x	400.00	x	4.50	x	0.25	=	450.00				
	2	x	400.00	x	0.90	x	0.125	=	90.00				
									=	540.00	Cum	493.00	266220.00
3	Wet Mix Macadam (Plant Mix Method) Providing, laying, spreading and compacting graded stone aggregate to wet mix macadam specification including premixing the Material with water at OMC in mechanical mix plant carriage of mixed Material by tipper to site, laying in uniform layers with paver/grader in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density (PWD SR 2023-24 Vol-3 , P.No -26 ,I No - 4.17)												
	1	x	400.00	x	4.00	x	0.15	=	240.00				
									=	240.00	Cum	2559.00	614160.00
4	Providing and applying primer coat with SS1 grade Bitumen Emulsion on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70 kg/m2 using mechanical means. (PWD SR 2023-24 Vol-3 , P.No -31 ,I No - 5.1)												
	1	x	400.00	x	4.00	x		=	1600.00				
									=	1600.00	Sqm	41.00	65600.00
5	Providing and laying Bituminous Macadam with 40/60 TPH capacity hot mix plant using crushed aggregates of specified grading premixed with bituminous binder VG-30 @ 3.4% by weight of mix, transported to site, laid over a previously prepared surface with mechanical paver finisher to the required grade, level and alignment and rolled as per clauses 501.6 and 501.7 to achieve the desired compaction (PWD SR 2021-22 Vol- 3 , P.No -30,I No - 5.8C)												
	1	x	400.00	x	3.50	x	0.050	=	70.00				
									=	70.00	Cum	7907.00	553490.00
6	Providing and applying tack coat with RS1 Bituminous Emulsion using emulsion pressure distributor at the rate of 0.20 kg/m2 on the prepared bituminous surface cleaned with mechanical broom (PWD SR 2023-24 Vol-3 , P.No -31 ,I No - 5.3(i))												
	1	x	400.00	x	3.50	x		=	1400.00				
									=	1400.00	Sqm	12.00	16800.00

7	Providing and laying Semi Dense Bituminous Concrete with 40/60 TPH capacity hot mix plant batch type using crushed aggregates of specified grading premixed with bituminous binder VG-30 @ 5% by weight of mix and filler, transported to site, laid over a previously prepared surface with mechanical paver finisher to the required grade, level and alignment and rolled as per MoRTH V revision. (PWD SR 2023-24 Vol-3 , P.No -43 ,I No - 5.31)										
	1	x	400.00	x	3.50	x	0.025	=	35.00		
								=	35.00	Cum	10152.00
8	Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads @ 250 g/m2 area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35:2015. The finished surface to be level, uniform and free from streaks and holes. (PWD SR 2023-24 Vol-3 , P.No -67 ,I No - 8.15)										355320.00
	2	x	400.00	x		x	0.10	=	80.00		
								=	80.00	Sqm	530.00
9	Providing S&S RCC SPUN / VIBRATED CAST PIPES (REINFORCED) pipes NP-3 Class conforming to IS:458-1988 with latest amentments using ordinary portland cement, for sanitary works and conveying to work site, rolling and lowering into trenches, laying true to line and level including loading and unloading at both destinations and jointing of pipes and specials, perfect linking of joints with jack to correct position including cost of jointing materials, i.e. rubber rings conforming to IS: 5382 for S&S RCC pipes, with all leads and lifts as directed and giving necessary hydraulic test as per ISS to the required pressure and commissioning etc. complete. (Contractor will make his own arrangements for procuring water for testing). Before the execution of the work, the contractor shall carry out of the survey 450 mm Dia (PWD SR 2023-24 Vol-5 , P.No -188 ,I No -16.3.5)										42400.00
	1	x	5.00	x		x		=	5.00		
								=	5.00	Mtr	2353.00
										Total Rs.	11765.00
										Add for GST 18% Rs.	1942555.00
										Total Rs.	349660.00
										3rd party charges rounding off Rs.	2292215.00
										7785.00	
										Grand Total Rs.	2300000.00


Junior Engineer
TMC MAHALINGAPUR

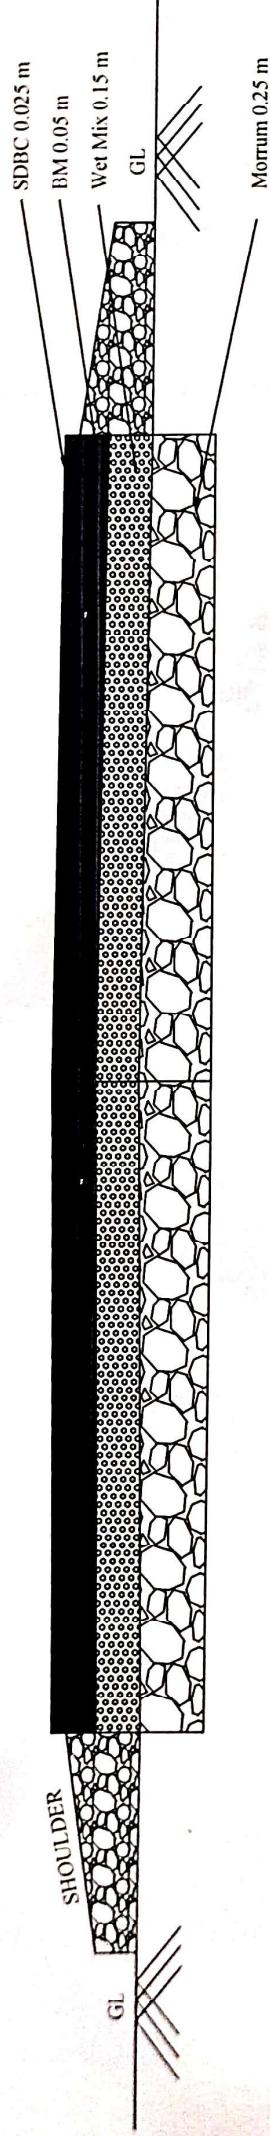

Chief Officer
TMC MAHALINGAPUR

DUDC/BGK/AEE/TECH-/34 01:31-01-2026
ಸದರಿ ಅಂದಾಜು ಪತ್ರಿಕೆಯನ್ನು ತಾಂತ್ರಿಕವಾಗಿ

ಪರಿಶೀಲಿಸಿ ರೂ: 23,50,000/-

Twenty three lakhs
Three thousand

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಜಿಲ್ಲಾ ನಗರಾಭಿವೃದ್ಧಿ ಕೋಶ
ಜಿಲ್ಲಾಧಿಕಾರಿಗಳ ಕಾರ್ಯಾಲಯ
ಬಾಗಲಕೋಟೆ



ಕಿರಿಯ ಅಭಿಯಂತರರು
ಮರಸಭೆ, ಮಹಾಲಿಂಗಪೂರ

ಮುಖ್ಯಾಧಿಕಾರಿಗಳು
ಮರಸಭೆ, ಮಹಾಲಿಂಗಪೂರ