

Zone 23 50.00 % WO's for year 2026-27		
S. No.	Work Order Name	Amount
1	Repair of roof, floor, toilet, plaster etc of gate lodges and gate quarters between MJZ-KHMA in PBE-TPU section.	495000.35
2	Repair of roof, floor, toilet, plaster etc of gate lodges and gate quarters between KHMA-BNSA in PBE-TPU section.	499964.50
3	Repair of roof, floor, toilet, plaster etc of gate lodges and gate quarters between PBE-MJZ in PBE-TPU section.	426797.65
4	Repair of doors, windows of gate lodges and gate quarters of PBE-TPU section.	445901.43
5	Repair of doors, windows of KHMA railway colony and TRD office.	287806.90
6	Repair of doors, windows of Tanakpur railway colony block 1 to 4	314294.50
7	Repair of doors, windows of Tanakpur railway colony block 5 to 8	482586.30
8	Periodical painting works of LC qtrs between PBE-MJZ	492572.67
9	Periodical painting works of LC qtrs between MJZ-KHMA	492572.67
10	Periodical painting works of LC qtrs between KHMA-BNSA.	369429.50
11	Service buildings tile and granite repair works at NRY, MJZ, KHMA, BNSA and TPU.	499450.16
12	Misc. repair work of RWP, Water hydrants, flooring, doors, RCC benches, roof parapets and water cooler stand of stations between Pilibhit-Tanakpur.	499047.51
13	TPU booking office second entry, flooring and Doors/Windows repair.	497134.87
14	TPU booking office ceiling repair.	100062.00
15	Painting of FOB at NRY, MJZ, KHMA, BNSA and TPU.	119100.00
16	Roof repair by aluminium alloy sheeting at MJZ type-1 (One Unit.)	497190.00
17	Roof repair by aluminium alloy sheeting at KHMA type-1 (One Unit.)	497190.00
18	Replacement of One-Bay PP shelter sheets at NRY and MJZ.	485043.75
19	Repair of doors, dampness, drains, back side apron and providing PVC wall panelling in high sealon areas at Running room and RPF barrack at Tanakpur.	418783.50
20	Repair of flooring, sanitary and tiles at Running room and RPF barrack at Tanakpur.	450698.54
	Grand Total=	8370626.79





क्षेत्र -सविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Periodical painting works of LC qtrs between KHMA-BNSA.

प्राधिकार.....

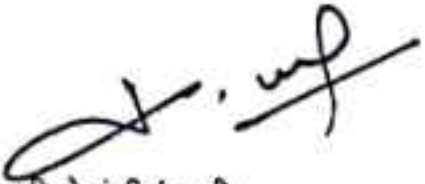
विनिधान.....

इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	13.90.1	2400.00	Distempering with 1st quality acrylic distemper (Ready mix) having VOC content less than 50 grams/ litre of approved brand and manufacture to give an even shade : Old work (one or more coats)	Sqm.	56.80	136320.00
2	13.99.1	343.68	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade : One or more coats on old work	Sqm.	86.55	29745.50
3	13.109.1	2160.00	Finishing walls with water proofing cement paint of required shade : Old work (one or more coats applied @ 2.20 kg/10 sqm) over priming coat of primer applied @ 0.80 litres/10 sqm complete including cost of Priming coat.	Sqm.	94.15	203364.00
Total=						369429.50
Gr. Total=						369429.50

इसमें उल्लिखित निर्माण कार्य (दिनांक)---30.06.2027---को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और सविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।

दिनांक-----

  
सी.से.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोत्लिखित क्षेत्र-सविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार यहां उल्लिखित निर्माण कार्या के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।

गवाह हस्ताक्षर .....  
दिनांक .....

(ठेकेदार/ ठेकेदारों का हस्ताक्षर) .....  
दिनांक.....



क्षेत्र -संविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

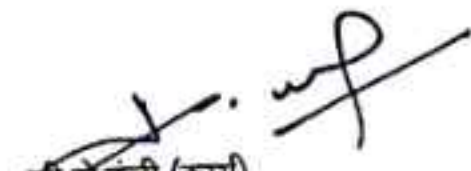
क्षेत्र संविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Periodical painting works of LC qtrs between MJZ-KHMA

प्राधिकार-..... विनिर्धान-.....  
इसके पहले संदर्भित क्षेत्र-संविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	13.90.1	3200.00	Distempering with 1st quality acrylic distember (Ready mix) having VOC content less than 50 grams/ litre of approved brand and manufacture to give an even shade : Old work (one or more coats)	Sqm.	56.80	181760.00
2	13.99.1	458.24	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade : One or more coats on old work	Sqm.	86.55	39660.67
3	13.109.1	2880.00	Finishing walls with water proofing cement paint of required shade : Old work (one or more coats applied @ 2.20 kg/10 sqm) over priming coat of primer applied @ 0.80 litres/10 sqm complete including cost of Priming coat.	Sqm.	94.15	271152.00
Total=						492572.67
Gr. Total=						492572.67

इसमें उल्लिखित निर्माण कार्य (दिनांक)---30.06.2027---को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक-----

  
पी.सी.ई.जी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहां नत्थी रेखणों के अनुरूप पूर्वोल्लिखित क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार यहां उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।  
(ठेकेदार/ठेकेदारों का हस्ताक्षर) -----

गवाह हस्ताक्षर -----  
दिनांक -----

दिनांक-----



पूर्वोत्तर रेलवे  
क्षेत्र-संविदा के अन्तर्गत निर्माणदेश

निर्माणदेश संख्या - 01/PT/26-27/

दिनांक-.....


क्षेत्र संविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Periodical painting works of LC qtrs between PBE-MJZ

प्राधिकार..... विनिधान.....  
इसके पहले संदर्भित क्षेत्र-संविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	13.90.1	3200.00	Distemping with 1st quality acrylic distemper (Ready mix) having VOC content less than 50 grams/ litre of approved brand and manufacture to give an even shade : Old work (one or more coats)	Sqm.	56.80	181760.00
2	13.99.1	458.24	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade : One or more coats on old work	Sqm.	86.55	39660.67
3	13.109.1	2880.00	Finishing walls with water proofing cement paint of required shade : Old work (one or more coats applied @ 2.20 kg/10 sqm) over priming coat of primer applied @ 0.80 litres/10 sqm complete including cost of Priming coat.	Sqm.	94.15	271152.00
Total=						492572.67
Gr. Total=						492572.67

इसमें उल्लिखित निर्माण कार्य (दिनांक)---30.06.2027---को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक-----

  
सी.से.इजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरिष्ठ मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोत्तिखित क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिदेशों के अनुसार  
यहां उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।

गवाह हस्ताक्षर .....  
दिनांक .....

(ठेकेदार/ठेकेदारों का हस्ताक्षर) .....  
दिनांक.....



पूर्वोत्तर रेलवे  
क्षेत्र -संविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र संविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Repair of doors, dampness, drains, back side apron and providing PVC wall panelling in high sealon areas at Running room and RPF barrack at Tanakpur.

प्राधिकार.....

विनिधान.....


इसके पहले संदर्भित क्षेत्र-संविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	9.128	4.80	Providing and fixing factory made Fiberglass Reinforced plastics (F.R.P.) chajja 4 mm thick of required colour.	Sqm.	4901.50	23527.20
2	9.84	10.00	Providing and fixing aluminium extruded section body tubular type universal hydraulic door closer (having brand logo with ISI, IS : 3564, embossed on the body, door weight upto 36 kg to 80 kg and door width from 701 mm to 1000 mm), with double speed adjustment with necessary accessories and screws etc. complete.	Each	856.30	8563.00
3	9.66.1	28.00	Providing and fixing ISI marked oxidised M.S. handles conforming to IS:4992 with necessary screws etc. complete : (copper oxidized as per IS: 1378) 125 mm	Each	35.20	985.60
4	9.21.1	8.00	Providing and fixing ISI marked flush door shutters 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	2015.75	16126.00
5	9.63.1	14.00	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (copper oxidized as per IS: 1378) 250x10 mm.	Each	74.65	1045.10
6	9.62.1	18.00	Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete : (copper oxidized as per IS: 1378) 300x16 mm	Each	180.55	3249.90



7	9.27.1.1.1	20.00	Providing and fixing wire gauge shutters using galvanized M.S. wire gauge of average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm, for doors, windows and clerestory windows with hinges and necessary screws : 35 mm thick shutters with ISI marked M.S. pressed butt hinges bright finished of required size Second class teak wood.	Sqm	4342.30	86846.00
8	11.3.1	120.00	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) 40 mm thick with 20 mm nominal size stone aggregate.	Sqm.	545.00	65400.00
9	13.4.2	100.00	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35	29435.00
10	13.80	200.00	Birla Putty	Sqm.	123.85	24770.00
11	13.91	200.00	Removing Oil bound distemper.	Sqm.	20.85	4170.00
12	4.1.3	6.00	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources).	Cum.	7365.15	44190.90
13	15.13.1	14.00	Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead Of area 3 sq. metres and below.	Each	118.30	1656.20
14	15.57	100.00	Dismantling old plaster.	Sqm.	45.05	4505.00
15	NS Item	96.00	"PROVIDING AND FIXING WALL PANNELING USINGPVC PANNEL 7mm THICK ( 200 x 3000 mm ) composite all perfect including all material & labour and as directed of Engineer in charge."	Sqm.	1086.60	104313.60
Total=						418783.50
Gr. Total=						418783.50

इसमें उल्लिखित निर्माण कार्य (दिनांक)—30.06.2027—को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ सकती है।  
दिनांक—

  
पी.सी.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजीनियर  
पीलीभीत

परि० मण्डल इंजीनियर(1) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोल्लिखित क्षेत्र—संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार

यहां उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गवाह हस्ताक्षर \_\_\_\_\_

(ठेकेदार/ठेकेदारों का हस्ताक्षर) \_\_\_\_\_

दिनांक \_\_\_\_\_

दिनांक \_\_\_\_\_



**पूर्वोत्तर रेलवे**  
**क्षेत्र -सविदा के अन्तर्गत निर्माणादेश**

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Repair of flooring, sanitary and tiles at Running room and RPF barrack at Tanakpur.

प्राधिकार-----

विनिधान-----

इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	11.41.2	20.00	Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joints with white cement and matching pigments etc., complete. Size of Tile 600x600 mm.	Sqm.	1416.65	28333.00
2	11.37	26.70	Providing and laying Ceramic glazed floor tiles of size 300x300 mm.	Sqm.	935.60	24980.52
3	11.46.2	12.00	Providing and laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joint with white cement & matching pigments etc. complete. Size of Tile 600x600 mm	Sqm.	1466.50	17598.00



4	11.20.4	6.00	Chequerred precast cement concrete tiles 22 mm thick in footpath & courtyard, jointed with neat cement slurry mixed with pigment to match the shade of tiles, including rubbing and cleaning etc. complete, on 20 mm thick bed of cement mortar 1:4 (1 cement: 4 coarse sand). Ordinary cement without any pigment.	Sqm.	928.50	5571.00
6	8.31	107.60	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	Sqm.	1063.45	114427.22
7	4.1.3	0.52	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources).	Cum.	7365.15	3829.88
8	6.1.1	1.00	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in: Cement mortar 1:4 (1 cement : 4 coarse sand)	Cum.	6882.00	6882.00
9	12.41.2	80.00	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming 110 mm diameter.	Mtr.	319.75	25580.00
10	12.42.5.2	34.00	Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes Bend 87.5° 110 mm bend.	Each	132.00	4488.00
11	12.43.2	15.00	PVC pipe clips.	Each	309.50	4642.50
12	12.42.3.2	6.00	Single TEE 110*110*110 mm	Each	205.45	1232.70
13	12.42.1.2	6.00	PVC 110 mm dia coupler	Each	119.95	719.70



14	13.4.2	107.60	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35	31672.06
15	14.84	120.00	Dismantling 15-40 mm dia GI pipe.	Mtr.	2.85	342.00
16	14.82	5.00	Dismantling WC pan/	Each	110.70	553.50
17	14.80.1	1.00	Providing and fixing WC pan long pattern 580*440 mm.	Each	2962.80	2962.80
18	18.65	10.00	Providing and fixing PTMT soap Dish Holder having length of 138mm, breadth 102mm, height of 75mm with concealed fitting arrangements, weighing not less than 106 gms.	Each	96.75	967.50
19	18.49.1	5.00	Providing and fixing C.P. brass bib cock of approved quality conforming to IS:8931 : 15 mm nominal bore.	Each	434.20	2171.00
20	18.51.1	5.00	Providing and fixing C.P. brass long body bib cock of approved quality conforming to IS standards and weighing not less than 690 gms. 15 mm nominal bore.	Each	708.40	3542.00
21	18.53.1	15.00	Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931 15mm nominal bore.	Each	500.35	7505.25
22	18.22.1	5.00	Providing and fixing C.P. brass shower rose with 15 or 20 mm inlet : 100 mm diameter.	Each	166.35	831.75
23	18.74.2	15.00	Providing and fixing unplasticised P.V.C. connection pipe with PTMT Nuts, collar and bush of approved quality and colour. 15 mm nominal bore with 45 cm length.	Each	107.90	1618.50
24	18.8.1	60.00	15 mm dia CPVC pipe- Concealed work.	Mtr.	441.15	26469.00
25	18.7.3	24.00	25 mm dia CPVC pipe- Internal work- Exposed on walls.	Mtr.	408.55	9805.20
26	18.7.2	36.00	20 mm dia CPVC pipe- Internal work- Exposed on walls.	Mtr.	325.10	11703.60

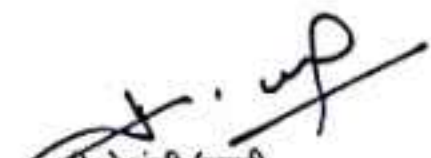


27	18.58.1.1	10.00	PTMT grating 100 mm circular type.	Each	33.20	332.00
28	17.2.1	4.00	European type WC pan.	Each	5540.55	22162.20
29	17.16A	4.00	8 mm dia SS jet.	Each	299.35	1197.40
30	17.7.2	5.00	Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require: White Vitreous China Wash basin size 630x450 mm with a single 15 mm C.P. brass pillar tap	Each	1913.75	9568.75
31	17.8	5.00	Providing and fixing white vitreous china pedestal for wash basin completely recessed at the back for the reception of pipes and fittings.	Each	1500.05	7500.25
32	17.28.1.1	5.00	Providing and fixing P.V.C. waste pipe for sink or wash basin including Semi rigid pipe 32 mm dia	Each	90.95	454.75
33	17.32.2	5.00	Providing and fixing mirror of superior glass (of approved quality) and of required shape and size with plastic moulded frame of approved make and shade with 6 mm thick hard board backing :  Rectangular shape 453x357 mm	Each	1158.95	5794.75
34	17.33	5.00	Providing and fixing 600x120x5 mm glass shelf with edges round off, supported on anodised aluminium angle frame with C.P. brass brackets and guard rail complete fixed with 40 mm long screws, rawl plugs etc., complete.	Each	942.15	4710.75
35	17.73.1	5.00	Providing and fixing PTMT towel rail complete with brackets fixed to wooden cleats with CP brass screws with concealed fittings arrangement of approved quality and colour. 450 mm long towel rail with total length of 495 mm, 78 mm wide and effective height of 88 mm, weighing not	Each	573.60	2868.00
36	17.72	5.00	Providing and fixing PTMT towel ring trapezoidal shape 215 mm long, 200 mm wide with minimum distances of 37 mm from wall face with concealed fittings arrangement of approved quality and colour,	Each	204.70	1023.50



37	17.22B	5.00	Providing and fixing CP Brass Single lever telephonic wall mixer of quality & make as approved by Engineer in charge. (a) 15 mm nominal dia	Each	6119.95	30599.75
38	15.52	5.00	Dismantling of flushing cistern.	Each	791.65	3958.25
39	15.2.1	0.52	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	Cum.	2007.10	1043.69
40	15.23.1	155.07	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead. For thickness of tiles 10 mm to 25 mm	Sqm.	60.50	9381.74
41	NS Item	48.00	Supplying, Erecting & fixing in position 150 mm dia PVC Rain water pipes of appd. Quality where ever reqd. complete inside the ways of diesel shed up to 9.0 mtr. height in shut down period complete with all labour.	Mtr.	243.21	11674.08
Total=						450698.54
Gr. Total=						450698.54

इसमें उल्लिखित निर्माण कार्य (दिनांक) — 30.06.2027 — को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक \_\_\_\_\_

  
सी. सी. इंजी. (कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर (I) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखाओं के अनुरूप पूर्वोक्तलिखित क्षेत्र—संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(ठेकेदार/ठेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक.....



पूर्वोत्तर रेलवे  
क्षेत्र -संविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र संविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Replacement of One-Bay PP shelter sheets at NRY and MJZ.

प्राधिकार.....

विनिधान.....

इसके पहले संदर्भित क्षेत्र-संविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
3	15.28.1	337.50	Dismantling roofing including ridges, hips, valleys and gutters etc., and stacking the material within 50 metres lead of: G.S. Sheet	Sqm.	136.00	45900.00
7	12.65.1	337.50	Providing & fixing at all heights, levels and locations colour finish Aluminium alloy roofing sheets 0.56 mm, Aluminium Color coated troughed profile with center to center pitch of 200 mm, depth of 32 mm, overall profile width 1092 mm, cover width 1000mm.	Sqm.	1006.30	339626.25
8	12.66.6	45.00	Providing and fixing of Pre-coated colour or mill finish Aluminium Roofing Accessories in 0.71 mm thickness Precoated/mill finish aluminium Gutter (600 mm over all girth)	Metre	1616.00	72720.00
1	13.100.1	337.50	Painting with aluminium paint of approved brand and manufacture to give an even shade: One or more coats on old work	Sqm.	79.40	26797.50
Total=						485043.75
Gr. Total=						485043.75

इसमें उल्लिखित निर्माण कार्य (दिनांक)--30.06.2027--को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।

दिनांक.....

  
सी.से.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरिष्ठ मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखाओं के अनुरूप पूर्वोत्तर रेलवे क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार

यहां उल्लिखित निर्माण कार्या के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गवाह हस्ताक्षर .....

दिनांक .....

(ठेकेदार/ ठेकेदारों का हस्ताक्षर) .....

दिनांक.....



पूर्वोत्तर रेलवे  
क्षेत्र -सविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Roof repair by alumnium alloy sheeting at MJZ type-1 (One Unit.)

प्राधिकार.....

विनिधान.....

इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	6.4.2	8.42	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum.	8288.35	69746.47
2	4.3.1	54.72	Centering and shuttering including strutting, propping etc. and removal of form work for :  Foundations, footings, bases for columns	Sqm.	307.95	16851.02
3	4.2.2	6.29	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing: 1:1½:3 (1 cement : 1½ coarse sand (zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size derived from natural sources).	Cum.	9793.75	61602.69
4	13.4.2	36.60	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35	10773.21
5	15.7.4	1.00	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge. In cement mortar.	Cum.	1698.45	1698.45



6	13.44.1	36.60	Finishing walls with water proofing cement paint of required shade New work (Two or more coats applied @ 3.84 kg/10 sqm)	Sqm.	97.60	3572.16
7	12.65.1	120.00	Providing & fixing at all heights, levels and locations colour finish Aluminium alloy roofing sheets 0.56 mm, Aluminium Color coated troughed profile with center to center pitch of 200 mm, depth of 32 mm, overall profile width 1092 mm, cover width 1000mm.	Sqm.	1006.30	120756.00
8	12.66.1	30.00	Providing and fixing of Pre-coated colour or mill finish Aluminium Roofing Accessories in 0.71 mm thickness Precoated/mill finish aluminium Ridges plain (500- 600mm).	Metre	969.50	29085.00
9	10.16.3	1300.00	Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete. Electric resistance or induction butt welded tubes.	Kg.	140.85	183105.00
Total=						497190.00
Gr. Total=						497190.00

इसमें उल्लिखित निर्माण कार्य (दिनांक)—30.06.2027—को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक—

  
म.स.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोत्लिखित क्षेत्र—संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार

यहां उल्लिखित निर्माण कार्या के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(ठेकेदार/ठेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक \_\_\_\_\_



पूर्वोत्तर रेलवे  
क्षेत्र -सविदा के अन्तर्गत निर्माणादेश

दिनांक-.....

निर्माणादेश संख्या - 01/PT/26-27/

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Roof repair by aluminium alloy sheeting at KHMA type-1 (One Unit.)

विनिर्धान-----


प्राधिकार-----  
इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर		रकम	
					रु०	पै०	रु०	पै०
1	2	3	4	5	6		7	
1	6.4.2	8.42	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum.	8288.35		69746.47	
2	4.3.1	54.72	Centering and shuttering including strutting, propping etc. and removal of form work for : Foundations, footings, bases for columns	Sqm.	307.95		16851.02	
3	4.2.2	6.29	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing: 1:1½:3 (1 cement : 1½ coarse sand (zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size derived from natural sources).	Cum.	9793.75		61602.69	
4	13.4.2	36.60	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35		10773.21	
5	15.7.4	1.00	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge. In cement mortar.	Cum.	1698.45		1698.45	



6	13.44.1	36.60	Finishing walls with water proofing cement paint of required shade New work (Two or more coats applied @ 3.84 kg/10 sqm)	Sqm.	97.60	3572.16
7	12.65.1	120.00	Providing & fixing at all heights, levels and locations colour finish Aluminium alloy roofing sheets 0.56 mm, Aluminium Color coated troughed profile with center to center pitch of 200 mm, depth of 32 mm, overall profile width 1092 mm, cover width 1000mm.	Sqm.	1006.30	120756.00
8	12.66.1	30.00	Providing and fixing of Pre-coated colour or mill finish Aluminium Roofing Accessories in 0.71 mm thickness Precoated/mill finish aluminium Ridges plain (500- 600mm).	Metre	969.50	29085.00
9	10.16.3	1300.00	Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete. Electric resistance or induction butt welded tubes.	Kg.	140.85	183105.00
Total=						497190.00
Gr. Total=						497190.00

इसमें उल्लिखित निर्माण कार्य (दिनांक)—30.08.2027—को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक—

  
श्री. सी. जे. (कार्य)  
पीलीभीत

सहायक मण्डल इंजीनियर  
पीलीभीत

वरिष्ठ मण्डल इंजीनियर (I) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखाओं के अनुरूप पूर्वोक्तलिखित क्षेत्र—संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(ठेकेदार/ ठेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक \_\_\_\_\_



पूर्वोत्तर रेलवे  
क्षेत्र -संविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

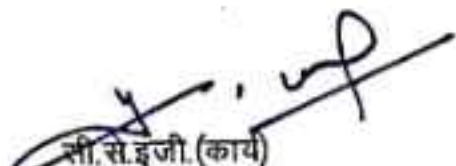
क्षेत्र संविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Painting of FOB at NRY, MJZ, KHMA, BNSA and TPU.

प्राधिकार..... विनिधान.....  
इसके पहले संदर्भित क्षेत्र-संविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	13.100.1	1500.00	Painting with aluminium paint of approved brand and manufacture to give an even shade: One or more coats on old work	Sqm.	79.40	119100.00
Total=						119100.00
Gr. Total=						119100.00

इसमें उल्लिखित निर्माण कार्य (दिनांक)---30.06.2027---को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ सकती है।  
दिनांक-----

  
सी.से.इ.जी. (कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर(1) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वालिखित क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार

यहां उल्लिखित निर्माण कार्या के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।

गयाह हस्ताक्षर .....  
दिनांक .....

(ठेकेदार/ ठेकेदारों का हस्ताक्षर) .....  
दिनांक.....



पूर्वोत्तर रेलवे  
क्षेत्र -सविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Misc. repair work of RWP, Water hydrants, flooring, doors, RCC benches, roof parapets and water cooler stand of stations between Pilibhit-Tanakpur.

प्राधिकार-.....

विनिधान-.....

इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर रु०      पै०	रकम रु०      पै०
1	2	3	4	5	6	7
1	11.3.1	50.00	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) 40 mm thick with 20 mm nominal size stone aggregate.	Sqm.	545.00	27250.00
2	9.21.1	10.00	Providing and fixing ISI marked flush door shutters 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	2015.75	20157.50
3	9.63.1	5.00	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (copper oxidized as per IS: 1378) 250x10 mm.	Each	74.65	373.25
4	9.62.1	10.00	Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete : (copper oxidized as per IS: 1378) 300x16 mm	Each	180.55	1805.50
5	6.4.2	5.00	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum.	8288.35	41441.75
6	13.4.2	210.00	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35	61813.50
7	15.2.1	3.20	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	Cum.	2007.10	6422.72
8	15.7.4	1.00	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge. In cement mortar.	Cum.	1698.45	1698.45



9	15.3	1.00	Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in-charge.	Cum.	2928.10	2928.10
10	4.1.3	4.60	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources).	Cum.	7365.15	33879.69
11	8.31	120.00	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	Sqm.	1063.45	127614.00
12	9.128	5.50	Providing and fixing factory made Fiberglass Reinforced plastics (F.R.P.) chajja 4 mm thick of required colour.	Sqm.	4901.50	26958.25
13	10.25.2	340.00	Steel work welded in built up sections/ framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works	Kg.	142.30	48382.00
14	12.41.2	40.00	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming 110 mm diameter.	Mtr.	319.75	12790.00
15	12.42.5.2	20.00	Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes Bend 87.5° 110 mm bend.	Each	132.00	2640.00

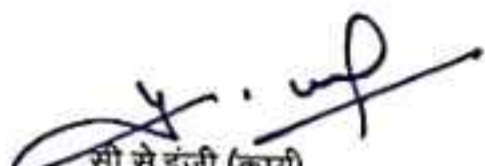


16	NS Item	10.00	Supplying, erecting and fixing precast concrete reinforced bench with back rest. Bench shall consist of 2 nos. L shaped base support in natural cement colour of thickness 100 mm, back height 1000 mm, front height 450 mm, base width 620 mm and 5 nos. reinforced concrete planks in red colour and size of 1500 x 100 x 50mm and 1 no. reinforced concrete plank of 150 x 200 x 50mm; manufactured by using M-30 grade concrete & reinforced suitably; all parts to be joined with galvanised nuts and bolts of suitable size. All bolts to be sealed after assembly. Complete job to be done as per directions of Engineer Incharge	Each	8289.28	82892.80	
						Total=	499047.51
						Gr. Total=	499047.51

इसमें उल्लिखित निर्माण कार्य (दिनांक) — 30.06.2027 — को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संश्लेष की सामान्य शर्तों की शर्तों के अधीन है।

इसमें उल्लिखित निर्माण कार्य (दिनांक) — 30.06.2027 — को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।

दिनांक

  
सी. से. ई. जी. (कार्य)  
पीलीभीत

सहायक मण्डल इंजीनियर  
पीलीभीत

वरिष्ठ मण्डल इंजीनियर (I) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नक्की रेखणों के अनुरूप पूर्वोक्तलिखित क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(ठेकेदार/ ठेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक \_\_\_\_\_



पूर्वोत्तर रेलवे  
क्षेत्र -संविदा के अन्तर्गत निर्माणदेश

निर्माणदेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र संविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Service buildings tile and granite repair works at NRY, MJZ, KHMA, BNSA and TPU.

प्राधिकार..... विनिर्धान.....  
इसके पहले संदर्भित क्षेत्र-संविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-संविदा करार के साथ नत्थी अनुसूची की दर रु० पैसे	रकम रु० पैसे
1	2	3	4	5	6	7
1	11.41.2	83.00	Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joints with white cement and matching pigments etc., complete. Size of Tile 600x600 mm.	Sqm.	1416.65	117581.95
2	11.37	42.00	Providing and laying Ceramic glazed floor tiles of size 300x300 mm.	Sqm.	935.60	39295.20
3	11.46.2	85.00	Providing and laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joint with white cement & matching pigments etc. complete. Size of Tile 600x600 mm	Sqm.	1466.50	124652.50



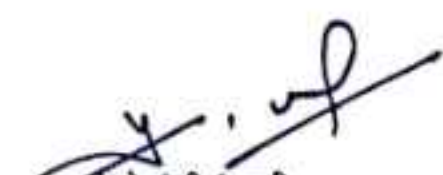
4	11.20.4	20.00	Chequerred precast cement concrete tiles 22 mm thick in footpath & courtyard, jointed with neat cement slurry mixed with pigment to match the shade of tiles, including rubbing and cleaning etc. complete, on 20 mm thick bed of cement mortar 1:4 (1 cement: 4 coarse sand). Ordinary cement without any pigment.	Sqm.	928.50	18570.00
5	11.56.1	10.00	Providing and laying Polished Granite stone flooring in required design and patterns, in linear as well as curvilinear portions of the building all complete as per the architectural drawings with 18 mm thick stone slab over 20 mm (average) thick base of cement mortar 1:4 (1 cement : 4 coarse sand) laid and jointed with cement slurry and pointing with white cement slurry admixed with pigment of matching shade including rubbing, curing and polishing etc. all complete as specified and as directed by the Engineer-in-Charge. Polished Granite stone slab colour of Black, Cherry/Ruby Red or equivalent	Sqm.	3908.80	39088.00
6	8.31	90.00	Providing and fixing Ist quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	Sqm.	1063.45	95710.50



7	8.2.2.2	10.00	Providing and fixing 18 mm thick gang saw cut, mirror polished, premoulded and prepolished, machine cut for kitchen platforms, vanity counters, window sills, facias and similar locations of required size, approved shade, colour and texture laid over 20 mm thick base cement mortar 1:4 (1 cement : 4 coarse sand), joints treated with white cement, mixed with matching pigment, epoxy touch ups, including rubbing, curing, moulding and polishing of edges to give high gloss finish etc. complete at all levels. Granite stone slab of colour black, Cherry/Ruby red. Area of slab over 0.50 sqm.	Sqm.	4425.35	44253.50
8	15.25	20.00	Dismantling stone slab flooring laid in cement mortar including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	Sqm.	219.75	4395.00
9	15.2.1	2.10	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	Cum.	2007.10	4214.91
10	15.23.1	193.20	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead. For thickness of tiles 10 mm to 25 mm	Sqm.	60.50	11688.60
Total=						499450.16
Gr. Total=						499450.16

इसमें उल्लिखित निर्माण कार्य (दिनांक)—30.06.2027—को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।

दिनांक—

  
सी.से.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोत्लिखित क्षेत्र—संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार

यहां उल्लिखित निर्माण कार्या के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(ठेकेदार/ ठेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक \_\_\_\_\_



पूर्वोत्तर रेलवे  
क्षेत्र-सविदा के अन्तर्गत निर्माणदेश

निर्माणदेश संख्या - 01/PT/26-27/

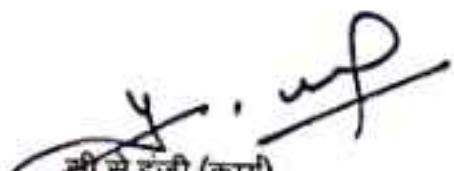
क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-..... के

अन्तर्गत निर्माण का काम- TPU booking office ceiling repair.

प्राधिकार..... विनिर्धान.....  
इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर	रकम
1	2	3	4	5	6	7
1	13.4.2	216.00	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35	63579.60
2	15.56	216.00	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	Sqm.	45.05	9730.80
3	13.80	216.00	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	Sqm.	123.85	26751.60
Total=						100062.00
Gr. Total=						100062.00

इसमें उल्लिखित निर्माण कार्य (दिनांक)---30.08.2027---को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और सविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक-----

  
सी.से.इ.जी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

यशो मण्डल इंजीनियर(1) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोत्तिखित क्षेत्र-सविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।

गवाह हस्ताक्षर .....  
दिनांक .....

(ठेकेदार/ठेकेदारों का हस्ताक्षर) .....  
दिनांक.....



पूर्वोत्तर रेलवे  
क्षेत्र -सविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-----

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-----के

अन्तर्गत निर्माण का काम- TPU booking office second entry, flooring and Doors/Windows repair.

प्राधिकार-----

विनिधान-----

इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नथी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नथी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	11.3.1	27.00	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) 40 mm thick with 20 mm nominal size stone aggregate.	Sqm.	545.00	14715.00
2	11.41.2	16.00	Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joints with white cement and matching pigments etc., complete. Size of Tile 600x600 mm.	Sqm.	1416.65	22666.40
3	11.37	2.70	Providing and laying Ceramic glazed floor tiles of size 300x300 mm.	Sqm.	935.60	2526.12
4	11.46.2	16.00	Providing and laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joint with white cement & matching pigments etc. complete. Size of Tile 600x600 mm	Sqm.	1466.50	23464.00



5	8.31	13.86	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	Sqm.	1063.45	14739.42
6	15.23.1	48.56	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead. For thickness of tiles 10 mm to 25 mm	Sqm.	60.50	2937.88
7	15.7.4	1.44	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge. In cement mortar.	Cum.	1698.45	2445.77
8	15.3	0.10	Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in-charge.	Cum.	2928.10	292.81
9	4.1.3	2.70	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources).	Cum.	7365.15	19885.91
10	21.13	2.00	Providing and fixing Brass 100mm mortice latch and lock with 6 levers without pair of handles (best make of approved quality) for aluminium doors including necessary cutting and making good etc. complete.	Each	449.55	899.10
11	21.12.1	4.00	Providing and fixing aluminium tubular handle bar 32 mm outer dia, 3.0 mm thick & 2100 mm long with SS screws etc .complete as per direction of Engineer-in-Charge. Anodized (AC 15 ) aluminium tubular handle bar.	Each	513.20	2052.80



12	21.17	40.00	Providing and fixing anodised aluminium grill	Kg.	560.85	22434.00
13	21.18	12.60	Providing and fixing 12mm thick frameless toughened glass door shutter of approved brand and manufacture, including providing and fixing top & bottom pivot & double acting hydraulic floor spring type fixing arrangement and making necessary holes etc. for fixing required door fittings, all complete as per direction of Engineer in charge (Door handle, lock and stopper etc. to be paid separately)	Sqm.	4540.70	57212.82
14	10.6.1	6.30	Supplying and fixing rolling shutters of approved make, made of required size M.S. laths, interlocked together through their entire length and jointed together at the end by end locks, mounted on specially designed pipe shaft with brackets, side guides and arrangements for inside and outside locking with push and pull operation complete, including the cost of providing and fixing necessary 27.5 cm long wire springs manufactured from high tensile steel wire of adequate strength conforming to IS: 4454 - part 1 and M.S. top cover of required thickness for rolling shutters. 80x1.25 mm M.S. laths with 1.25 mm thick top cover	Sqm.	3008.80	18955.44
15	10.7	2.00	Providing and fixing ball bearing for rolling shutters.	Each	424.20	848.40
16	9.147D.1	10.08	Providing and fixing UPVC window, Two track and two panel.	Sqm.	7634.10	76951.73
17	9.128	2.88	Providing and fixing factory made Fiberglass Reinforced plastics (F.R.P.) chajja 4 mm thick of required colour.	Sqm.	4901.50	14116.32
18	10.28	162.00	Providing and fixing stainless steel ( Grade 304) railing made of Hollow tubes, channels, plates etc.	Kg.	612.25	99184.50
19	12.41.2	16.00	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming 110 mm diameter.	Mtr.	319.75	5116.00
20	12.42.5.2	8.00	Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes	Each	132.00	1056.00



21	SCH J NS Item	54.00	Supplying, erecting and laying position 3 mm thick plain embraced polycarbonaate sheets of approved and transparency on the roof in the profile to much the profile of roofing sheets etc.	Sqm.	1752.49	94634.46
Total=						497134.87
Gr. Total=						497134.87

इसमें उल्लिखित निर्माण कार्य (दिनांक)---30.08.2027---को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक-----

  
सी.से.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ मल्टी रेखणों के अनुरूप पूर्वोल्लिखित क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्या के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(ठेकेदार/ठेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक.....



पूर्वोत्तर रेलवे

क्षेत्र -सविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Repair of doors, windows of Tanakpur railway colony block 5 to 8

प्राधिकार-.....

विनिधान-.....

इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR-	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर	रकम
1	2	3	4	5	रु० पैसे	रु० पैसे
1	9.120.1	7.00	Providing and fixing factory made panel PVC door shutter consisting of frame made of 30 mm thick plain PVC door shutters.	Sqm	2455.10	17185.70
2	9.55.3	15.00	Providing and fixing ISI marked IS : 1341 M.S. pressed butt hinges bright finished with necessary screws etc. complete 75x47x1.70mm.	Each	32.75	491.25
3	9.51.1	5.40	Providing and fixing fly proof galvanized M.S. wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm all complete. With second class teak wood beading 62X19 mm.	Sqm	1164.90	6290.46
4	10.25.2	400.00	Steel work welded in built up sections/ framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required In gratings, frames, guard bar, ladder, railings, brackets, gates and similar work.	Kg	142.30	56920.00
5	10.15.1	288.00	Providing and fixing M.S. Tubular frames for doors, windows, ventilators and cupboard with rectangular/ L-Type sections, made of 1.60 mm thick M.S. Sheet, joints mitred, welded and grinded finish, with profiles of required size, including fixing of necessary butt hinges and screws and applying a priming coat of approved steel primer. Fixing with 15x3 mm lugs 10 cm long embedded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Kg	146.55	42206.40
6	9.27.1.1.1	39.44	Providing and fixing wire gauge shutters using galvanized M.S. wire gauge of average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm, for doors, windows and clerestory windows with hinges and necessary screws : 35 mm thick shutters with ISI marked M.S. pressed butt hinges bright finished of required size Second class teak wood.	Sqm	4342.30	171260.31

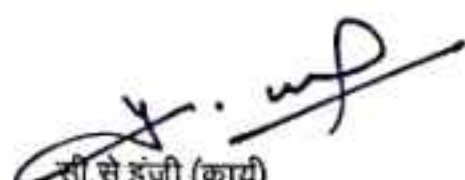


7	9.48.1	192.00	Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete. Fixed to steel windows by welding.	Kg	181.00	34752.00
8	14.85	10.00	Taking out existing wooden door shutter, repair by cutting, painting etc. and refixing of repaired door shutters to existing door frames, including replacement of hinges with screws, etc. as required, all complete as per the direction of the Engineer-in-charge.	Each	325.95	3259.50
9	15.13.1	33.00	Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead Of area 3 sq. metres and below.	Each	118.30	3903.90
10	21.3.1	5.40	Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with EPDM rubber / neoprene gasket etc. complete as per the architectural drawings and the directions of engineer-in-charge. (Cost of aluminium snap beading shall be paid in basic item): With float glass panes of 4.0 mm thickness (weight not less than 10kg/sqm).	Sqm	1019.80	5506.92
11	9.21.1	14.00	Providing and fixing ISI marked flush door shutters 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	2015.75	28220.50
12	9.12	11.76	Extra for providing frosted glass panes 4 mm thick (weight not less than 10 kg per sqm) instead of ordinary float glass panes 4 mm thick (weight not less than 10 kg per sqm) in doors, windows and clerestory window shutters. (Area of opening for glass panes excluding portion inside rebate shall be measured).	Sqm	148.50	1746.36
13	9.9.1.1	19.44	Providing and fixing glazed shutters for doors, windows and clerestory windows using 4 mm thick float glass panes, (weight not less than 10 kg per sqm) fixing with ISI marked M.S. pressed butt hinges bright finished of required size with necessary screws. Second class teak wood, 35 mm thick.	Sqm	4458.40	86671.30
14	9.66.1	130.00	Providing and fixing ISI marked oxidised M.S. handles conforming to IS:4992 with necessary screws etc. complete : (copper oxidized as per IS: 1378) 125 mm	Each	35.20	4576.00



15	9.100.1	10.00	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete : 125 mm	Each	60.05	600.50
16	9.97.2	10.00	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868 ) transparent or dyed to required colour or shade, with necessary screws etc. complete : 250x10 mm	Each	104.40	1044.00
17	9.68.1	32.00	Providing and fixing oxidised M.S. casement stays (straight peg type) with necessary screws etc. complete. (copper oxidized as per IS: 1378) 300 mm weighing not less than 330 grams	Each	59.25	1896.00
18	9.63.3	192.00	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (copper oxidized as per IS: 1378) 150x10 mm	Each	53.05	10185.60
19	9.63.1	23.00	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (copper oxidized as per IS: 1378) 250x10 mm.	Each	74.65	1716.95
20	9.62.1	23.00	Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete : (copper oxidized as per IS: 1378) 300x16 mm	Each	180.55	4152.65
Total=						482586.30
Gr. Total=						482586.30

इसमें उल्लिखित निर्माण कार्य (दिनांक)---30.06.2027---को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ सकती है।  
दिनांक-----

  
सी.से.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर(१) इज्जतनगर  
कूते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोल्लिखित क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्या के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(ठेकेदार/ ठेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक\_\_\_\_\_



पूर्वोत्तर रेलवे

क्षेत्र -सविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-----

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-----के

अन्तर्गत निर्माण का काम- Repair of doors, windows of Tanakpur railway colony block 1 to 4

प्राधिकार-----

विनिर्धान-----

इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR-	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर	रकम
1	2	3	4	5	6	7
					रु० प०	रु० प०
1	9.120.1	7.00	Providing and fixing factory made panel PVC door shutter consisting of frame made of 30 mm thick plain PVC door shutters.	Sqm	2455.10	17185.70
2	9.55.3	15.00	Providing and fixing ISI marked IS : 1341 M.S. pressed butt hinges bright finished with necessary screws etc. complete 75x47x1.70mm.	Each	32.75	491.25
3	9.51.1	5.40	Providing and fixing fly proof galvanized M.S. wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm all complete. With second class teak wood beading 62X19 mm.	Sqm	1164.90	6290.46
4	10.15.1	288.00	Providing and fixing M.S. Tubular frames for doors, windows, ventilators and cupboard with rectangular/ L-Type sections, made of 1.60 mm thick M.S. Sheet, joints mitred, welded and grinded finish, with profiles of required size, including fixing of necessary butt hinges and screws and applying a priming coat of approved steel primer. Fixing with 15x3 mm lugs 10 cm long embedded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Kg	146.55	42206.40
5	9.27.1.1.1	19.44	Providing and fixing wire gauge shutters using galvanized M.S. wire gauge of average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm, for doors, windows and clerestory windows with hinges and necessary screws : 35 mm thick shutters with ISI marked M.S. pressed butt hinges bright finished of required size Second class teak wood.	Sqm	4342.30	84414.31
6	9.48.1	192.00	Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete. Fixed to steel windows by welding.	Kg	181.00	34752.00

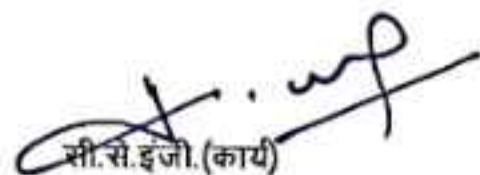


7	14.85	10.00	Taking out existing wooden door shutter, repair by cutting, painting etc. and refixing of repaired door shutters to existing door frames, including replacement of hinges with screws, etc. as required, all complete as per the direction of the Engineer-in-charge.	Each	325.95	3259.50
8	15.13.1	7.00	Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead Of area 3 sq. metres and below.	Each	118.30	828.10
9	21.3.1	5.40	Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with EPDM rubber / neoprene gasket etc. complete as per the architectural drawings and the directions of engineer-in-charge . (Cost of aluminium snap beading shall be paid in basic item); With float glass panes of 4.0 mm thickness (weight not less than 10kg/sqm).	Sqm	1019.80	5506.92
10	9.21.1	6.00	Providing and fixing ISI marked flush door shutters 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	2015.75	12094.50
11	9.12	11.76	Extra for providing frosted glass panes 4 mm thick (weight not less than 10 kg per sqm) instead of ordinary float glass panes 4 mm thick (weight not less than 10 kg per sqm) in doors, windows and clerestory window shutters. (Area of opening for glass panes excluding portion inside rebate shall be measured).	Sqm	148.50	1746.36
12	9.9.1.1	19.44	Providing and fixing glazed shutters for doors, windows and clerestory windows using 4 mm thick float glass panes, (weight not less than 10 kg per sqm) fixing with ISI marked M.S. pressed butt hinges bright finished of required size with necessary screws. Second class teak wood, 35 mm thick.	Sqm	4458.40	86671.30
13	9.66.1	102.00	Providing and fixing ISI marked oxidised M.S. handles conforming to IS:4992 with necessary screws etc. complete : (copper oxidized as per IS: 1378) 125 mm	Each	35.20	3590.40
14	9.100.1	10.00	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete : 125 mm	Each	60.05	600.50



15	9.97.2	10.00	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868 ) transparent or dyed to required colour or shade, with necessary screws etc. complete : 250x10 mm	Each	104.40	1044.00
16	9.68.1	32.00	Providing and fixing oxidised M.S. casement stays (straight peg type) with necessary screws etc. complete. (copper oxidized as per IS: 1378) 300 mm weighing not less than 330 grams	Each	59.25	1896.00
17	9.63.3	192.00	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (copper oxidized as per IS: 1378) 150x10 mm	Each	53.05	10185.60
18	9.63.1	6.00	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (copper oxidized as per IS: 1378) 250x10 mm.	Each	74.65	447.90
19	9.62.1	6.00	Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete : (copper oxidized as per IS: 1378) 300x16 mm	Each	180.55	1083.30
Total=						314294.50
Gr. Total=						314294.50

इसमें उल्लिखित निर्माण कार्य (दिनांक) — 30.06.2027 — को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक —————

  
सी.स.इजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजीनियर  
पीलीभीत

यसि० मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नलथी रेखणों के अनुरूप पूर्वोल्लिखित क्षेत्र—संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(टेकेदार/टेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक .....



**पूर्वोत्तर रेलवे**  
**क्षेत्र –सविदा के अन्तर्गत निर्माणादेश**

निर्माणादेश संख्या – 01/PT/26-27/

दिनांक—.....

क्षेत्र सविदा करार सं०—IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक—.....के

अन्तर्गत निर्माण का काम— Repair of doors, windows of KHEMA railway colony and TRD office.

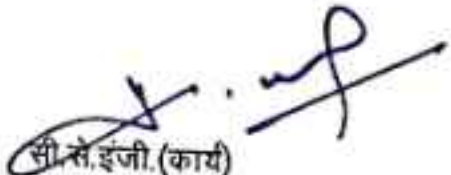
प्राधिकार—..... विनिर्धान—.....  
इसके पहले संदर्भित क्षेत्र—सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है—

क्रम संख्या	क्षेत्र—सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR-	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र—सविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	9.120.1	21.00	Providing and fixing factory made panel PVC door shutter consisting of frame made of 30 mm thick plain PVC door shutters.	Sqm	2455.10	51557.10
2	9.55.3	30.00	Providing and fixing ISI marked IS : 1341 M.S. pressed butt hinges bright finished with necessary screws etc. complete 75x47x1.70mm.	Each	32.75	982.50
3	9.51.1	21.60	Providing and fixing fly proof galvanized M.S. wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm all complete. With second class teak wood beading 62X19 mm.	Sqm	1164.90	25161.84
4	9.51.2	21.60	Providing and fixing fly proof galvanized M.S. wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm all complete. With 12 mm mild steel U beading.	Sqm	812.40	17547.84
5	9.27.1.1.1	20.00	Providing and fixing wire gauge shutters using galvanized M.S. wire gauge of average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm, for doors, windows and clerestory windows with hinges and necessary screws : 35 mm thick shutters with ISI marked M.S. pressed butt hinges bright finished of required size Second class teak wood.	Sqm	4342.30	86846.00
6	14.5.1	21.60	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty: Float glass panes of nominal thickness 4 mm (weight not less than 10kg/sqm)	Sqm	941.95	20346.12
7	14.85	10.00	Taking out existing wooden door shutter, repair by cutting, painting etc. and refixing of repaired door shutters to existing door frames, including replacement of hinges with screws, etc. as required, all complete as per the direction of the Engineer-in-charge.	Each	325.95	3259.50
8	15.13.1	40.00	Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead Of area 3 sq. metres and below.	Each	118.30	4732.00



9	9.21.1	30.00	Providing and fixing ISI marked flush door shutters 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	2015.75	60472.50
10	9.66.1	50.00	Providing and fixing ISI marked oxidised M.S. handles conforming to IS:4992 with necessary screws etc. complete : (copper oxidized as per IS: 1378) 125 mm	Each	35.20	1760.00
11	9.100.1	30.00	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete : 125 mm	Each	60.05	1801.50
12	9.97.2	30.00	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868 ) transparent or dyed to required colour or shade, with necessary screws etc. complete : 250x10 mm	Each	104.40	3132.00
13	9.63.1	40.00	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (copper oxidized as per IS: 1378) 250x10 mm.	Each	74.65	2986.00
14	9.62.1	40.00	Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete : (copper oxidized as per IS: 1378) 300x16 mm	Each	180.55	7222.00
Total=						287806.90
Gr. Total=						287806.90

इसमें उल्लिखित निर्माण कार्य (दिनांक) — 30.06.2027 — को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।  
दिनांक—

  
सी. सी. ई.जी. (कार्य)  
पीलीभीत

सहायक मण्डल इंजीनियर  
पीलीभीत

वरिष्ठ मण्डल इंजीनियर (I) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहां नत्थी रेखणों के अनुरूप पूर्वालिखित क्षेत्र—संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(टेकेंदार/टेकेंदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक \_\_\_\_\_



**पूर्योत्तर रेलवे**  
**क्षेत्र -सविदा के अन्तर्गत निर्माणादेश**

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Repair of doors, windows of gate lodges and gate quarters of PBE-TPU section.

प्राधिकार-.....

विनिधान-.....

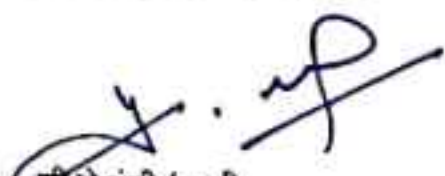
इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	9.120.1	21.00	Providing and fixing factory made panel PVC door shutter consisting of frame made of 30 mm thick plain PVC door shutters.	Sqm	2455.10	51557.10
2	9.119	23.50	Providing and fixing factory made P.V.C. door frame of size 50x47 mm with awall thickness of 5 mm, made out of extruded 5mm rigid PVC foam sheet.	Mtr.	408.25	9593.88
3	9.55.3	45.00	Providing and fixing ISI marked IS : 1341 M.S. pressed butt hinges bright finished with necessary screws etc. complete 75x47x1.70mm.	Each	32.75	1473.75
4	9.51.1	36.00	Providing and fixing fly proof galvanized M.S. wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm all complete. With second class teak wood beading 62X19 mm.	Sqm	1164.90	41936.40
5	10.25.2	300.00	Steel work welded in built up sections/ framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required In gratings, frames, guard bar, ladder, railings, brackets, gates and similar work.	Kg	142.30	42690.00
6	10.15.1	120.00	Providing and fixing M.S. Tubular frames for doors, windows, ventilators and cupboard with rectangular/ L-Type sections, made of 1.60 mm thick M.S. Sheet, joints mitred, welded and grinded finish, with profiles of required size, including fixing of necessary butt hinges and screws and applying a priming coat of approved steel primer. Fixing with 15x3 mm lugs 10 cm long embedded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Kg	146.55	17586.00
7	9.27.1.1.1	12.00	Providing and fixing wire gauge shutters using galvanized M.S. wire gauge of average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm, for doors, windows and clerestory windows with hinges and necessary screws : 35 mm thick shutters with ISI marked M.S. pressed butt hinges bright finished of required size Second class teak wood.	Sqm	4342.30	52107.60



8	9.51.2	18.00	Providing and fixing fly proof galvanized M.S. wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm all complete. With 12 mm mild steel U beading.	Sqm	812.40	14623.20
9	9.48.2	120.00	Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete. Fixed to openings /wooden frames with rawl plugs screws etc.	Kg	197.70	23724.00
10	9.50	20.00	Providing and fixing hard drawn steel wire fabric 75x25 mm mesh of weight not less than 7.75 Kg per sqm to window frames etc. including 62x19 mm beading of second class teak wood and priming coat with approved steel primer all complete.	Sqm	1484.70	29694.00
11	14.85	40.00	Taking out existing wooden door shutter, repair by cutting, painting etc. and refixing of repaired door shutters to existing door frames, including replacement of hinges with screws, etc. as required, all complete as per the direction of the Engineer-in-charge.	Each	325.95	13038.00
12	15.13.1	40.00	Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead Of area 3 sq. metres and below.	Each	118.30	4732.00
13	10.2	250.00	Structural steel work riveted, bolted or welded in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.	Kg	111.95	27987.50
14	9.21.1	40.00	Providing and fixing ISI marked flush door shutters 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	2015.75	80630.00
15	9.63.1	60.00	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (copper oxidized as per IS: 1378) 250x10 mm.	Each	74.65	4479.00
16	9.62.1	40.00	Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete : (copper oxidized as per IS: 1378) 300x16 mm	Each	180.55	7222.00
17	14.29	40.00	Providing and fixing M.S. round or square bars with M.S. flats at required spacing in wooden frames of windows and clerestory windows.	Kg	99.70	3988.00
18	14.5.1	20.00	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty Float glass panes of nominal thickness 4 mm (weight not less than 10kg/sqm).	Sqm	941.95	18839.00
Total=						445901.43
Gr. Total=						445901.43

इसमें उल्लिखित निर्माण कार्य (दिनांक)—30.06.2027—को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ सकती है।  
दिनांक—

  
सी.से.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरि० मण्डल इंजीनियर(१) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोत्लिखित क्षेत्र—संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्य के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गयाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(टेकेदार/टेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक \_\_\_\_\_



**पूर्वोत्तर रेलवे**  
**क्षेत्र -सविदा के अन्तर्गत निर्माणादेश**

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Repair of roof, floor, toilet, plaster etc of gate lodges and gate quarters between PBE-MJZ in PBE-TPU section.

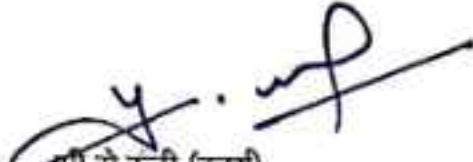
प्राधिकार..... विनिधान.....  
इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-

क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर रु०      पै०	रकम रु०      पै०
1	2	3	4	5	6	7
1	22.7.1	75.00	Providing and laying integral cement based water proofing treatment including preparation of surface as required for treatment of roofs, balconies, terraces etc consisting of following operations- With average thickness of 120 mm and minimum thickness at khurra as 65 mm.	Sqm.	1522.95	114221.25
2	11.3.1	150.00	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) 40 mm thick with 20 mm nominal size stone aggregate.	Sqm.	545.00	81750.00
3	6.1.2	6.00	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in: Cement mortar 1:6 (1 cement : 6 coarse sand).	Cum.	6658.25	39949.50
4	6.4.2	3.00	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:6 (1 cement : 6 coarse sand).	Cum.	8288.35	24865.05
5	13.4.2	200.00	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35	58870.00
6	15.56	200.00	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	Sqm.	45.05	9010.00
7	5.12	1.00	Providing, hoisting and fixing above plinth level up to floor five level precast reinforced cement concrete work in string courses, bands, copings, bed plates, anchor blocks, plain window sills.	Cum.	9673.50	9673.50
8	5.22.6	50.00	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	Kg.	89.65	4482.50
9	15.7.4	3.00	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge in cement mortar.	Cum.	1698.45	5095.35
10	15.3	1.00	Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in-charge.	Cum.	2928.10	2928.10



11	13.80	150.00	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	Sqm.	123.85	18577.50
12	15.2.1	6.00	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix).	Cum.	2007.10	12042.60
13	10.16.1	50.00	Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position Hot finished welded type tubes.	Kg.	154.90	7745.00
14	4.1.3	2.00	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources).	Cum.	7365.15	14730.30
15	12.41.2	12.00	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming 110 mm diameter.	Mtr.	319.75	3837.00
16	12.42.5.2	8.00	Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes Bend 87.5° 110 mm bend.	Each	132.00	1056.00
17	11.1.2	20.00	Brick on edge flooring with bricks of class designation 7.5 on a bed of 12 mm cement mortar, including filling the joints with same mortar, with common burnt clay non modular bricks: 1:6 (1cement : 6 coarse sand).	Sqm.	898.20	17964.00
Total=						426797.65
Gr. Total=						426797.65

इसमे उल्लिखित निर्माण कार्य (दिनांक)---30.06.2027---को अथवा उसके पहले पूरे होने चाहिए। इसमे अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ सकती है।  
दिनांक-----

  
सी. से. इ. जी. (कार्य)  
पी. ली. मी. टी.

सहायक मण्डल इंजीन  
पी. ली. मी. टी.

वरिष्ठ मण्डल इंजीनियर (I) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नक्की रेखणों के अनुरूप पूर्वोल्लिखित क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो ) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्या के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ ।  
गवाह हस्ताक्षर \_\_\_\_\_ (टेकदार/टेकदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक \_\_\_\_\_ दिनांक \_\_\_\_\_



**पूर्वोत्तर रेलवे**  
**क्षेत्र -सविदा के अन्तर्गत निर्माणादेश**

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Repair of roof, floor, toilet, plaster etc of gate lodges and gate quarters between KHMA-BNSA in PBE-TPU section.

प्राधिकार..... विनिधान.....  
इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-


क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर रु०      पै०	रकम रु०      पै०
1	2	3	4	5	6	7
1	22.7.1	72.00	Providing and laying integral cement based water proofing treatment including preparation of surface as required for treatment of roofs, balconies, terraces etc consisting of following operations- With average thickness of 120 mm and minimum thickness at khurra as 65 mm.	Sqm.	1522.95	109652.40
2	12.50	4.00	Providing and fixing precoated galvanised iron profile sheets (size, shape and pitch of corrugation as approved by Engineer-in-charge)	Sqm.	671.55	2686.20
3	11.3.1	250.00	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) 40 mm thick with 20 mm nominal size stone aggregate.	Sqm.	545.00	136250.00
4	6.1.2	3.00	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in: Cement mortar 1:6 (1 cement : 6 coarse sand).	Cum.	6658.25	19974.75
5	6.4.2	3.00	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:6 (1 cement : 6 coarse sand).	Cum.	8288.35	24865.05
6	13.4.2	200.00	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35	58870.00
7	15.56	200.00	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	Sqm.	45.05	9010.00
8	5.12	1.00	Providing, hoisting and fixing above plinth level up to floor five level precast reinforced cement concrete work in string courses, bands, copings, bed plates, anchor blocks, plain window sills.	Cum.	9673.50	9673.50
9	5.22.6	50.00	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	Kg.	89.65	4482.50
10	15.7.4	6.00	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge in cement mortar.	Cum.	1698.45	10190.70



11	15.3	1.00	Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in-charge.	Cum.	2928.10	2928.10
12	13.80	200.00	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	Sqm.	123.85	24770.00
13	15.2.1	10.00	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix).	Cum.	2007.10	20071.00
14	10.16.1	50.00	Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position Hot finished welded type tubes.	Kg.	154.90	7745.00
15	14.80.1	4.00	Providing & fixing White vitreous china water closet squatting pan (Indian type) Long pattern W.C Pan of size 580x440 mm.	Each	2962.80	11851.20
16	4.1.3	2.00	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources).	Cum.	7365.15	14730.30
17	12.41.2	12.00	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming 110 mm diameter.	Mtr.	319.75	3837.00
18	12.42.5.2	8.00	Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes Bend 87.5° 110 mm bend.	Each	132.00	1056.00
19	2.25 A	40.00	Excavating, supplying and filling of local earth (including royalty) by mechanical transport upto a lead of 5km also including ramming and watering of the earth in layers not exceeding 20 cm in trenches, plinth, sides of foundation etc. complete.	Cum.	368.65	14746.00
20	11.1.2	14.00	Brick on edge flooring with bricks of class designation 7.5 on a bed of 12 mm cement mortar, including filling the joints with same mortar, with common burnt clay non modular bricks: 1:6 (1 cement : 6 coarse sand).	Sqm.	898.20	12574.80
Total=						499964.50
Gr. Total=						499964.50

इसमें उल्लिखित निर्माण कार्य (दिनांक) — 30.08.2027 — को अथवा उसके पहले पूरे होने चाहिए। इसमें अनुमानित है और संविदा की सामान्य शर्तों की धारा 42 के अन्तर्गत इसमें घट और बढ़ सकती है।

दिनांक \_\_\_\_\_

  
सी.से.इंजी.(कार्य)  
पीलीभीत

सहायक मण्डल इंजी०  
पीलीभीत

वरिष्ठ मण्डल इंजीनियर (I) इज्जतनगर  
कृते भारत के राष्ट्रपति

यहाँ नत्थी रेखणों के अनुरूप पूर्वोल्लिखित क्षेत्र-संविदा सम्बन्धी सामान्य व विशेष शर्तों (यदि कोई हो) यथा विनिर्देशों के अनुसार यहाँ उल्लिखित निर्माण कार्यों के उपर्युक्त तिथि को अथवा उसके पूर्व करने का करार करता हूँ।

गवाह हस्ताक्षर \_\_\_\_\_  
दिनांक \_\_\_\_\_

(टेकेदार/टेकेदारों का हस्ताक्षर) \_\_\_\_\_  
दिनांक \_\_\_\_\_



पूर्वोत्तर रेलवे  
क्षेत्र -सविदा के अन्तर्गत निर्माणादेश

निर्माणादेश संख्या - 01/PT/26-27/

दिनांक-.....

क्षेत्र सविदा करार सं०--IZN/DIV/ENG/NER-IZN-2026-ZONE 23/..... दिनांक-.....के

अन्तर्गत निर्माण का काम- Repair of roof, floor, toilet, plaster etc of gate lodges and gate quarters between MJZ-KHMA in PBE-TPU section.

प्राधिकार-----

विनिधान-----

इसके पहले संदर्भित क्षेत्र-सविदा करार के अन्तर्गत ठेकेदार ..... को एतद्वारा निम्नलिखित निर्माण कार्य करने का आदेश दिया जाता है-


क्रम संख्या	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की मद सं० DSR- 2021	अनुमानित परिमाण	निर्माण मद विवरण	इकाई	क्षेत्र-सविदा करार के साथ नत्थी अनुसूची की दर रु० पै०	रकम रु० पै०
1	2	3	4	5	6	7
1	22.7.1	75.00	Providing and laying integral cement based water proofing treatment including preparation of surface as required for treatment of roofs, balconies, terraces etc consisting of following operations- With average thickness of 120 mm and minimum thickness at khurra as 65 mm.	Sqm.	1522.95	114221.25
2	11.3.1	250.00	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) 40 mm thick with 20 mm nominal size stone aggregate.	Sqm.	545.00	136250.00
3	6.1.2	3.00	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in: Cement mortar 1:6 (1 cement : 6 coarse sand).	Cum.	6658.25	19974.75
4	6.4.2	3.00	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:6 (1 cement : 6 coarse sand).	Cum.	8288.35	24865.05
5	13.4.2	200.00	12 mm cement plaster of mix 1:6 (1 cement: 6 coarse sand).	Sqm.	294.35	58870.00
6	15.56	200.00	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	Sqm.	45.05	9010.00
7	5.12	1.00	Providing, hoisting and fixing above plinth level up to floor five level precast reinforced cement concrete work in string courses, bands, copings, bed plates, anchor blocks, plain window sills.	Cum.	9673.50	9673.50
8	5.22.6	50.00	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	Kg.	89.65	4482.50
9	15.7.4	6.00	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge in cement mortar.	Cum.	1698.45	10190.70



10	15.2	3.00	Remedial R.C.C. work manually by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in-charge	Cum	2928.10	2928.10
11	15.80	200.00	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete	Sqm	123.85	24770.00
12	15.2.1	10.00	Remedial cement concrete manually by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix).	Cum	2007.10	20071.00
13	15.80.1	8.00	Providing & fixing White vitreous china water closet squatting pan (Indian type) Long pattern W.C. Pan of size 500x440 mm.	Each	2962.80	11851.20
14	16.1	2.00	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources)	Cum	7365.15	14730.30
15	13.40.2	12.00	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming 110 mm diameter	Mtr.	319.75	3837.00
16	13.42.5.2	8.00	Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes Bend 45° 110 mm Bend	Each	132.00	1056.00
17	1.25.8	40.00	Excavating, supplying and filling of local earth (including royalty) by mechanical transport upto a lead of 5km also including ramming and winching of the earth in layers not exceeding 20 cm in trenches, plinth, sides of foundation etc. complete	Cum	368.65	14746.00
18	11.1.2	15.00	Brick on edge flooring with bricks of class designation 7.5 on a bed of 12 mm cement mortar, including filling the joints with same mortar, with common burnt clay non modular bricks: 1:6 (1 cement : 6 coarse sand).	Sqm.	898.20	13473.00
Total=						495000.35
Gr. Total=						495000.35

नवीन उचितिकृत निर्माण कार्य (विभाग) - 20.08.2022 - को अथवा उसके बाद के पूरे होने चाहिए। इसकी अनुमानित है और सदिका की सामान्य शर्तों की ताल 25 के अनुसार इसमें धरा नीचे कर सकते हैं।

दिनांक \_\_\_\_\_

  
 (Engineer) (Signature)  
 सी.सी.पी.ए.

आचार्यक सहायक इंजीनियर  
 सी.सी.पी.ए.

दक्षिण भारतीय इंजीनियरिंग (ए) इंजीनियरिंग  
 को भारत के राष्ट्रपति

नवीन उचितिकृत निर्माण कार्य के अनुमानित पूरा होने के बाद-सदिका सम्बन्धी सामान्य व विशेष शर्तों (जो कोई हो) को निर्दिष्ट की अनुसार नवीन उचितिकृत निर्माण कार्य के उपरान्त निर्माण को अथवा उसके पूरे करने को कराने कराना है।

नवीन उचितिकृत निर्माण कार्य के उपरान्त निर्माण को अथवा उसके पूरे करने को कराने कराना है।

(हस्ताक्षर/हस्ताक्षर को हस्ताक्षर)  
 दिनांक \_\_\_\_\_