


Rough Sketch showing proposed locations of the protection works near BR no 34,86,87,88,90 and 91.

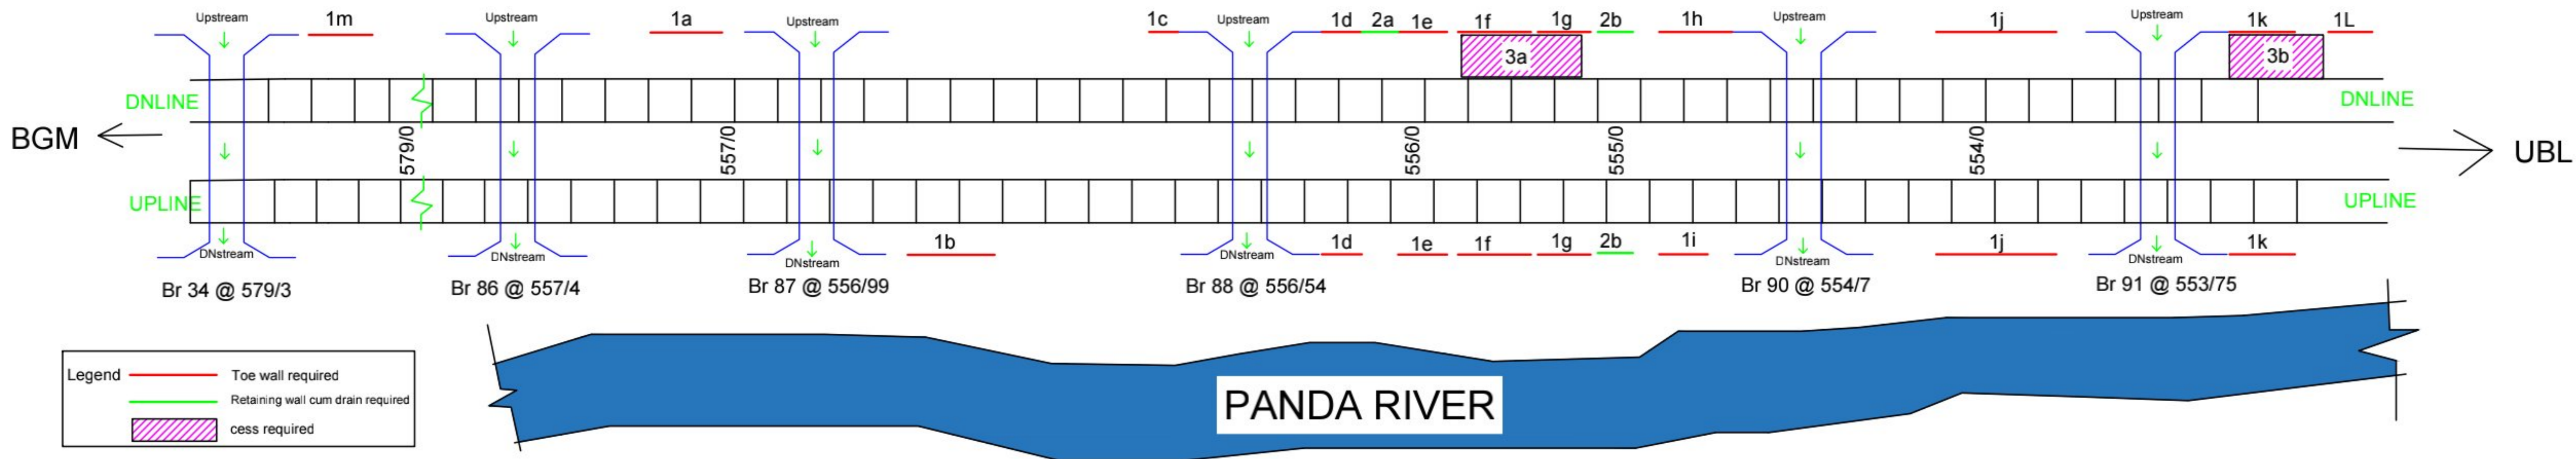

DETAILS OF THE PROPOSED LOCATION

S L No	Description	From	To	Total Length (m)	RH/LH/Both
1a	Toe wall	557/2	557/0	200	RH
b	Toe wall	556/820	556/350	270	LH
c	Toe wall	556/600	556/550	50	RH
d	Toe wall	556/550	556/400	300	Both
e	Toe wall	556/050	555/950	200	Both
f	Toe wall	555/800	555/520	760	Both
g	Toe wall	555/510	555/200	620	Both
h	Toe wall	554/900	554/700	200	RH
i	Toe wall	554/900	554/800	100	LH
j	Toe wall	554/200	553/800	800	Both
k	Toe wall	553/750	553/400	700	Both
l	Toe wall	553/200	553/100	100	RH
m	Toe wall	579/400	579/200	200	RH
2a	Retaining wall cum drain	556/400	556/050	350	RH
b	Retaining wall cum drain	555/100	554/900	400	Both
3a	Cess	555/300	555/700	400	RH
b	Cess	553/750	553/400	350	RH

S N	Description	Length
1	Total Toe Wall	4500 m
2	Total Retaining wall cum drain	750 m
3	Total Cess	750 m

RAKESH
KUMAR
OJHA

JE/WORKS/BGM

Digitally signed by RAKESH KUMAR OJHA
DN: c=IN, o=SOUTH WESTERN RAILWAY,
ou=4th ENGINEERING,
2.5.4.20=9160b0c7813aa2d77467e629f2
e38c8b25ccbcc3eaa268f47a674b921f66d
91, postalCode=580022, sn=RAKESH KUMAR OJHA,
serialNumber=2cc256c48c4a81ccc3683e
10559e933586285db015baadfd36019219a
e6258062c, cn=RAKESH KUMAR OJHA
Date: 2024.11.26 11:35:07 +05'30'

MAHESH
BARALE

ADEN/BGM

Digitally signed
by MAHESH
BARALE
Date: 2024.11.26
13:16:12 +05'30'

DETAILS OF THE PROPOSED LOCATION

SL No	Description	From	To	Total Length (m)	RH/LH/Both
1 a	Toe wall				
b	Toe wall	557/2	557/0	200	RH
c	Toe wall	556/820	556/350	270	LH
d	Toe wall	556/550	556/400	300	Both
e	Toe wall	556/600	556/550	50	RH
f	Toe wall	556/050	555/950	200	Both
g	Toe wall	555/800	555/520	760	Both
h	Toe wall	555/510	555/200	620	Both
i	Toe wall	554/900	554/700	200	RH
j	Toe wall	554/900	554/800	100	LH
k	Toe wall	554/200	553/800	800	Both
l	Toe wall	553/750	553/400	700	Both
m	Toe wall	553/200	553/100	100	RH
2 a	Retaining wall cum drain	579/400	579/200	200	RH
b	Retaining wall cum drain	556/400	556/050	350	RH
3 a	Cess	555/100	554/900	400	Both
b	Cess	555/300	555/700	400	RH
		555/750	553/400	350	RH

SN	Description	Length
1	Total Toe Wall	4500 m
2	Total Retaining wall cum drain	750 m
3	Total Cess	750 m

R. Jha
JE/W/BGM

[Signature]
सहायक मंडल इंजीनियर
Assistant Divisional Engineer
द. प. रेलवे, बेलगावि
South Western Railway, Belagavi