

4748367/2025/O/O SR DEE/M/NED/SCR

MAHAVITARAN

Maharashtra State Electricity Distribution Co. Ltd.

(A Govt. of Maharashtra Undertaking)

CIN - U40109MH2005SGC153645

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO. LTD.Website-www.mahadiscom.in OFFICE OF Ex. ENGINEER,E-mail-eeWSM@gmail.com O & M DIVISION, CIVIL LINE,

WASHIM - 444505

INo: - EE./WSM/Tech/

6298

Date:- 25/11/25

To,
The Dy Exe.Engineer,
M.S.E.D.C.Ltd.,
Malegaon S/dn,
Ta-Malegaon, Dist-Washim.

Sub: - Technical Sanction of Estimate for additional T/F of 200 KVA for load extension in r/o Amanwadi Railway Station load of 1.3 kw to 120 kw at Village Amanwadi, under Kinhiraja section, Malegaon sub dn, tq, Malegaon dist washim

Ref: - 1) Circular No. 22197 Dt.20-05-2013 (For releasing connections)
2) CE(DIST)/D-III/16037 Dt 08.06.2012.
3) CE(Dist)/D-III/Non DDF Stoppage/14747...Dt.15.06.2018
4) CE(Dist)/D-III/SG/DDF/30175...Dt.21.12.2018
5) CE(Dist)/RE/Ag Pump/14025...Dt.07.06.2017
6) Dy Exe.Engineer/Malegaon/T/2076Dt. 29.10.2025
7) EE/WSM/T/Inward/6276Dt.06.11.2025

With reference to ~~Key Infra Pvt Ltd~~ Estimate for additional T/F of 200 KVA for load extension in r/o Amanwadi Railway Station load of 1.3 kw to 120 kw at Village Amanwadi, under Kinhiraja section, Malegaon sub dn, tq, Malegaon dist washim is hereby technically sanctioned vide

No. EE/WSM/TS/1.3%/2025-26/73 Dt.25.11.2025

Estimated Amount Rs.770717/- Therefore, **1.3% Supervision Charges-Rs.10019/- + GST @ 18%Rs.1803/- (Total Charges to be Recovered Rs11822/- In Words - Eleven Thousand Eight Hundred Twenty Two/-)**

As per powers re-delegated to the undersigned vide Circular No. CE/Dist/D-III/16037 Dt.08-06-2012 to GO-2, Section II (Works), clause No. 1 (E) (V), the EE is empowered to sanction technical estimate for works under administratively approved scheme up to Rs. 25.00 Lakhs & loads up to 150KW.

You are therefore requested to take up the work after observing all necessary formalities & following condition should be strictly followed.

- 1) The work should be allowed to carry out with their men & material only after payment of supervision charges & GST. The differential amount if any due to change in cost-data or change in estimate during pendency of work, will be recovered from party.
- 2) Before starting the work, it should be confirmed that the material being used by the party is as per MSEDCL specifications.
- 3) The execution of the work should be strictly as per the MSEDCL supervision.
- 4) Xerox copies of the purchase receipts of the line material of work, should be obtained and preserved for record.
- 5) The Transformer should be purchased for 5 Year guarantee period as per approved vender list and tested by Executive Engineer (Testing) Division, Washim. The guarantee card should be handed over to local Division office. As per CE/Dist/D-IV/3-Star rating/T-F/25852 Dt.16.08.2010 T/F should be three star labeled.

MAHAVITARAN
 Maharashtra State Electricity Distribution Co. Ltd.
 (A Govt. of Maharashtra Undertaking)
 CIN - U40109MH2005SGC153645

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO. LTD.
 Website-www.mahadiscom.in OFFICE OF Ex. ENGINEER,
 E-mail -eeWSM@gmail.com O & M DIVISION, CIVIL LINE,
 WASHIM - 444505

- 6) NOC of local body & owner of premises to be obtained & verify all documents before issuing Demand Note.
- 7) Work Should be carried out by Licensed Electrical Contractor approved by Govt. of Maharashtra after execution of agreement between consumer & contractor and permission from Executive Engineer Washim Division.
- 8) After completion of work, you have to complete WCR as per sanction estimate & obtain third party agreement between contractor and Ex. Engineer washim for guarantee of applied material & erected work, also electrical inspector permission as per rule.
- 9) Only after release order of this office, the above work is to be charged / commissioned by following guidelines.
- 10) The dismantled material should be credited to sub division store as per directive issued vide circular CE/MMC/SM/CIRCULAR/T/3574...Dt.25.10.2016 regarding proper accounting of the old removed material must be followed.
- 11) The difference amount if any in supervision charges due to cost data or change in estimate value during pendency of work shall be record from party and undertaking to effect shall be obtained from the party before commencement of work.
- 12) Submit Contractor Agreement, Material Inspection report before execution of work and Electrical Inspection report and WCR report after Work execution to this office. Necessary Conditions may also please be included as per MSEDCL's rule while execution and completion of work. This sanction is valid upto 6 Months from date of Issue.

Sanction No-EE/WSM/TS/1.3%/2025-26/73 Dt. 25.11.2025

Provision:- 1)DTC -200 KVA , HT-0.1KM , SPCP-1 NO, LT-0.15KM

**Executive Engineer,
 MSEDCL, Washim Dn.**

Copy to:- 1) Superintending Engineer, Washim Circle, Washim

2) Divisional Account MSEDCL Washim Dn

Note :- 1) Please verify all relevant documents of consumer to your end before issuing demand note.

2) Also follow the procedure of WCR, Agreement & Strictly obtain release order from this before commissioning of work.

To

The E.E. Washim

Sub: Submission of estimate for Sanction.

Plz find enclosed estimate Additional TF 200
KVA for load Extension Amanwadi Railway


Station 1.3 KV To 120 KW connection ~~At~~

Amanwadi Gat No at village Amanwadi
in r/o under kinhiaga S/Pn

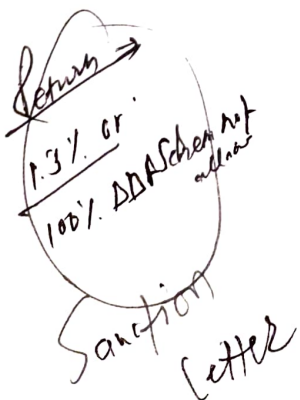
Submitted for NA plz

Enclosure

A.A.


उपकार्यक्रम अभियंता
म.रा.वि.वि.क.पनी मर्या.,
मालेगांव जि.वाशिम

M.S.E.D.C.L. O&M Dn. Washim
I/W. No. 5276
06 NOV 2025
A.E.E.(M) Dy. E.E.(O) AE-I/AE-II/AE (Infra)
AE (Fly. Sqd.) Tech./Rev./Fin/GAD


1.3% cr.
100% DDASchen not
Sanction letter

4748367/2025/MA/SP DEE/M/NED/SCR

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO LTD.
WASHIM DIVISION

JE/KINHIRAJA/T/
 TO

JUSTIFICATION NOTE
 181

DT 27.10.25

THE DYEXECUTIVE ENGINEER
 MSEDCL
 MALEGAON

SUBJEC = SUBMISSION OF ESTIMATE FOR SANCTION
 RESP SIR

Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI
 AMANWADI RAILWAY STATION 1.3KW TO 120KW connection AT, village
 AMANWADI GAT NO under kinhiraja section, Malegaon S/Dn, Tq.
 Malegaon & Dist Washim

YOUR FAITHFUL

JE KINHIRAJA

M.SED.C.Ltd, Malegaon

Receipt No. 1636

Date 29/10/2025

J.E.Q.

O.I.C (S)

Asstt. Ad.

U.D.

U.D.

G.C.

Executive Engineer

4748367/2025/O/o SR DEE/M/NED/SCR

**MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO LTD.
WASHIM DIVISION**

JUSTIFICATION NOTE

JE/KINHIRAJA/T/

180

DT

27.10.25

TO

THE DYEXECUTIVE ENGINEER

MSEDCL

MALEGAON

SUBJEC = JUSTIFICATION NOTE

RESP SIR

IT IS KIND REQUEST PLEASE FIND ENCLOSED ESTIMATE, WHERE 200 KVA ADDITIONAL TRANSFORMER PROPOSED FOR RAILWAY STATION AMANWADI VILLAGE. BECAUSE CONSUMER APPLIED FOR LOAD EXTENSION. THERE WILL BE DAILY FUSE BLOWN OFF IN PEAK LOAD TIMING. TO GIVE UN INTERRUPTED SUPPLY PLEASE SANCTION ESTIMATE FOR ADDITIONAL TRANSFORMER.

YOUR FAITHFUL



JE KINHIRAJA

24.11.2025

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO LTD.
WASHIM DIVISION

ESTIMATE REPORT

- 1 Title of Estimate Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI AMANWADI RAILWAY STATION 1.3KW TO 120KW connection AT, village AMANWADI GAT NO under kinhiraja section, Malegaon S/Dn, Tq. Malegaon & Dist Washim
- 2 Particulars :- As per Abstract Sheet
- 3 Total Amount of Estimate :- ₹ 770,717.00
- 4 Authority :- The Executive Engineer, O & M Division, Washim.
- 5 Supply system :- Three Phase 440 Volts, 50 Hz AC Supply
- 6 Route length :-
- 7 Types of Support :- PSC/ RSJ Pole 9/8 Mtr
- 8 Size of Conductor :- AAAC 55 Sqmm
- 9 Span :- 50-60 Mtr
- 10 Capacity of Existing Transformer :- N.A. KVA
- 11 Capacity of Proposed Transformer :- 200 KVA
- 12 Percentage of Revenue Return :- -
- 13 Budget Head :- ~~100000~~ 1.5% Surcharge DAF
- 14 Remarks :- Recommended for sanction or otherwise.

Prepared by,

JE
KINHIRAJA

Audited by

Dy. Manager (F&A)
M.S.E.D.C.Ltd,
Washim Division

Recommended / Checked by,

Dy. Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

Approved by,

Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

Technically Scrutinized
AE (E) / Dy. EE (O)

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO LTD. **WASHIM DIVISION**

Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI AMANWADI RAILWAY STATION
1.3KW TO 120KW connection AT, village AMANWADI GAT NO under kinhiraja section, Malegaon S/Dn,
Tq. Malegaon & Dist Washim

ABSTRACT

Sr.No.	Perticulars	Unit	Qty	Amount (Rs.)
1	H.T.Line (11kv) RSJ 116x100, 9 m long	KM		-
2	H.T.Line (11kv) PSC Pole 9 Mtr (200 KG)	KM	0.1	38,684.00
3	Augumentation of Pole mounted Distribution Transformer Sub-station 11/0.433 KV 63 KVA to 11/0.433 kv 100 KVA	Nos		-
4	Augumentation of Pole mounted Distribution Transformer Sub-station 11/0.433 KV 100 KVA to 11/0.433 kv 200 KVA	Nos		-
5	Cost of Transformer Capacity 200 KVA	Nos	1	411,320.00
6	Cost of Transformer Capacity 100 KVA	Nos		-
7	Cost of Transformer Capacity 63 KVA	Nos		-
8	Cost of Transformer Capacity 25 KVA	Nos		-
9	Cost of Transformer Capacity 16 KVA	Nos		-
10	Single Pole cut point structure for 11KV line 9/11 M	Nos	1	32,566.00
11	11 kV A.B. Switch 400 Amp with DP structure	Nos		-
12	11 kV A.B. Switch 400 Amp without DP structure	Nos		-
13	L.T.Line wth AB Cable	KM	0.15	62,006.00
14	LT AB Cable with one pole Extension of Service Connection	No		-
15	Three Phase/Single Phase Service Connection charges for New overhead Connections.	No	1	23,380.00

A	Cost of Material		₹	567,956.00
B	Labour charges (15%) A	15.00%	₹	85,194.00
C	Dismantling Charges (If any)			
E	Total (A+B+C)		₹	653,150.00
F	GST (18%) on D	18.00%	₹	117,567.00
G	Grand Total(D+E)		₹	770,717.00
I	1.3% Supervision Charges on F	1.30%	₹	10,019.32
	GST (18%) on G	18.00%		1,803.48
	Total 1.3% Supervision Charges with GST			11,822.80

JE
KINHIRAJA
Washim Division

Audited by

Dy. Manager (F&A)
M.S.E.D.C.Ltd,
Washim Division

Dy. Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

Approved by,

Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

Technically Sanctioned
AE.(E) / DyEE (O)

4748367/2025/O/o SR DEE/M/NED/SCR

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION COMPANY LIMITED
WASHIM DIVISION

Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI AMANWADI RAILWAY
 STATION 1.3KW TO 120KW connection AT, village AMANWADI GAT NO under kinhiraja section,
 Malegaon S/Dn, Tq. Malegaon & Dist Washim

Item Code No. 0908
 Cost data for 11 KV Single circuit Pin type with 55sq.mm AAAC lines on 100x116 mm 9 mtr PSC
 poles

(A) HT Line : 0.10 KM					
Sr.No.	Description of Material	Unit	Qty.	RT/U Rs.	Amount
1	PSC Pole 9 Mtr (200 KG)	No.	2	2983.00	5,966.00
2	11 kv guarding channel MS 75x40	Kg.	10	70.00	700.00
3	M.S.Channel 75x40x6 mm	Kg.	12	70.00	840.00
4	MS angle 50x50x6 mm	Kg.	7	70.00	490.00
5	11 KV V cross arm with clamp	No.	1	863.00	863.00
6	11 KV Top fitting with clamp	No.	1	123.00	123.00
7	M.S. Flats(50 X 10mm)	Kg.	4	65.00	260.00
8	11 kv Pin Insulators with G.I. Pins	No.	6	120.00	720.00
9	Disc Insulator 11 KV 70 KN	No.	3	326.00	978.00
10	Strain Hardware for 55 Sq.mm AAAC	Set	3	175.00	525.00
11	AAAC 55 mm ²	Rmt	315	36.00	11,340.00
12	Sleve Joints	No.	0	145.00	-
13	H.T.Stay Set	Set	1	807.00	807.00
14	G.I.Stay Wire 7/4mm(8 SWG)	Kg.	14	72.00	1,008.00
15	Earthing Sets H.T	Set	2	462.00	924.00
16	G.I.Barbed Wire 'A' type.	Kg.	7	80.00	560.00
17	Danger Board in yard.	No.	2	87.00	174.00
18	Concreting ration 1:3:6	Cmt.	2	4328.00	8,656.00
19	G.I.Wire 8 SWG/ 6 SWG	Kg.	13	72.00	936.00
20	Black Bituminus Paint	Ltr.	1	150.00	150.00
21	Red Oxide Paint for 2 coats	Ltr.	2	124.00	248.00
22	Aluminium Paint for 1 coat	Ltr.	1	260.00	260.00
23	G.I.Nut Bolts	Kg.	9	112.00	1,008.00
24	Sundries	LS	1	886.00	886.00
25	Wedge connectors				
a)	RABIT To RABIT or equivalent AAAC	No	2	131.00	262.00

Cost of material

₹ 38,684.00

Say Rs.

₹ 38,684.00

Prepared by,

JE
 KINHIRAJA
 Washim Division

Audited by

Dy. Manager (F&A)
 M.S.E.D.C.Ltd,
 Washim Division

Recommended / Checked by,

Dy.Executive Engineer,
 M.S.E.D.C.Ltd,
 Washim Division

Approved by,

Executive Engineer,
 M.S.E.D.C.Ltd,
 Washim Division

Technically Scrutinized
 AL (E) / Dy EE (O)

4748367/2025/O/o SR DEE/M/NED/SCR

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION COMPANY LIMITED
WASHIM DIVISION

Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI AMANWADI RAILWAY STATION 1.3KW TO 120KW connection AT, village AMANWADI GAT NO under kinhiraja section, Malegaon S/Dn, Tq. Malegaon & Dist Washim


Cost Data for LT Aerial Bunch Cable Line on PSC Pole

LT Line 0.15 KM					
SR.NO.	DESCRIPTION OF MATERIALS.	UNIT	QTY	RT/UNIT (RS)	AMT.(RS)
1	PSC Pole 8 Mtr (140 KG)	No.	3	2178	6534
2	RSJ 116x100, 8 m long	No.	0	6322	0
3	M.S.Flat 50 x 6 mm	Kg	5	65	325
4	Earthing Sets L.T.	No	2	224	448
5	L.T. Stay sets	No	2	637	1274
6	G.I.Stay Wire 7/3.15mm(10SWG)	Kg	12	72	864
7	Stay Insulators	No	2	15	30
8	G.I.Wire 8 SWG/ 6 SWG	Kg.	3	72	216
9	Concreting ration 1:3:6	Cmt	1	4328	4328
10	Sundries such as N/B, Washers, Welding etc.	LS	0	886	0
11	L.T.Aerial bunched cable(3x70+1x16+1x50)	Rmt	150	231	34650
12	AB suspension clamp assembly for AB cable	Pair	2	266.2	532.4
13	AB Dead End clamp assembly for AB cable	Pair	2	399.3	798.6
14	Piercing Connector for network	No	9	133.1	1197.9
15	Piercing Connector for service box	No	15	133.1	1996.5
16	Neutral Bare Conductor Connector	No	3	60	180
17	WPTC 10 sq mm	Rmt	21	36	756
18	SMC Spring Loaded Service Connection Box (9 way) for 3 Phase Incoming (R,Y,B) and 9 Nos. Single Phase Outgoing Connections	No	3	2625	7875

A Total Cost of material

Say Rs. ₹ 62,005.40
 ₹ 62,006.00

Prepared by,


 JE
 KINHIRAJA
 Washim Division

Audited by


Dy. Manager (F&A)
 M.S.E.D.C.Ltd,
 Washim Division

Recommended / Checked by,


 Dy.Executive Engineer,
 M.S.E.D.C.Ltd,
 Washim Division

Approved by,


 Executive Engineer,
 M.S.E.D.C.Ltd,
 Washim Division


 Technically Scrutinized
 AE (E) / Dy. EE (O)

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION COMPANY LIMITED
WASHIM DIVISION

Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI AMANWADI RAILWAY STATION 1.3KW TO 120KW connection AT, village AMANWADI GAT NO under kinhiraja section, Malegaon S/Dn, Tq. Malegaon & Dist Washim

Item code No. 0923/924

SINGLE POLE CUT POINT STRUCTURE FOR 11KV LINE ON RSJ 9/11 M POLE

S.N.	Description of material	SPCP	1	Nos.	RT/U.Rs.	Amt Rs.
1	RSJ 116x100, 11 m long		Unit	Qty.		
2	RSJ 116x100, 9 m long		No.	0	24630.75	-
3	M.S.Channel 75x40x6 mm		No.	1.0	12493.00	12,493.00
4	MS angle 50x50x6 mm		Kg.	40.0	70.00	2,800.00
5	Strain Hardware for Dog0.1 or Equ.AAAC.		Kg.	25.0	70.00	1,750.00
6	Disc Insulator 11 KV 70 KN		No.	6.0	370.00	2,220.00
7	H.T.Stay Set		No.	6.0	326.00	1,956.00
8	G.I.Stay Wire 7/4mm(8 SWG)		No.	2.0	807.00	1,614.00
9	Earthing Sets H.T		Kg.	13.0	72.00	936.00
10	G.I.Wire 8 SWG/ 6 SWG		No.	1.0	462.00	462.00
11	G.I.Barbed Wire 'A' type.		Kg.	2.0	72.00	144.00
12	Black Bituminus Paint		Kg.	2.0	80.00	160.00
13	Red Oxide Paint for 2 coats		Ltr.	0.5	87.00	43.50
14	Aluminium Paint for 1 coat		Ltr.	1.5	150.00	225.00
15	Danger Board in yard.		Ltr.	1.0	124.00	124.00
16	Concreting ration 1:3:6		No.	1.0	260.00	260.00
17	Sundries		Cmt.	1.5	4328.00	6,492.00
			LS	1.0	886.00	886.00

Cost of material

₹ 32,565.50

Say Rs.

₹ 32,566.00

Prepared by,

JE
KINHIRAJA
Washim Division

Recommended / Checked by,

Dy.Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

Audited by

Dy. Manager (F&A)
M.S.E.D.C.Ltd,
Washim Division

Approved by,

Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

Technically Scrutinized
AE (E) / Dy EE (O)

4748367/2025/O/o SR DEE/M/NED/SCR

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO LTD. **WASHIM CIRCLE**

Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI AMANWADI RAILWAY STATION 1.3KW TO 120KW connection AT, village AMANWADI GAT NO under kinhiraja section, Malegaon S/Dn, Tq. Malegaon & Dist Washim

Item Code No. 1204					
POLE MOUNTED DISTRIBUTION TRANSFORMER SUB-STATION 200KVA, 11/0.433 KV ON 9 mtr RSJ POLE					
S.N.	Description of Material	Unit	QTY	RT/U.Rs.	Amt Rs.
1	Dist. Transformer 200 KVA, 11/0.43 kv	No.	1	258752.00	258752.00
2	RSJ 116x100, 9 m long	No.	2	12493.00	24986.00
3	MS Channel 100x50x6 mm	Kg.	124	70.00	8680.00
4	M.S.Channel 75x40x6 mm	Kg.	100	70.00	7000.00
5	MS angle 50x50x6 mm	Kg.	86	70.00	6020.00
6	M.S. Flats(50 X 10mm)	Kg.	56	65.00	3640.00
7	11 kV Pin Insulators with G.I. Pins	No.	3	120.00	360.00
8	Disc Insulator 11 KV 45 KN	No.	3	295.00	885.00
9	Strain Hardware for 34 Sq.mm AAAC	No.	3	161.00	483.00
10	L.T.Dist.Boxes 200 KVA with MCCB	No.	1	31332.00	31332.00
11	L.As. 11 KV (Gapless type) with disconnector	Set	1	1531.00	1531.00
12	H.T.Stay Set	No.	2	807.00	1614.00
13	G.I.Stay Wire 7/4mm(8 SWG)	Kg.	16	72.00	1152.00
14	Earthing Sets H.T	No.	5	462.00	2310.00
15	11KV H.G.Fuses	Set	1	2475.00	2475.00
16	11KV A.B. Switch, 400 A	No.	1	11642.00	11642.00
17	Danger Board in yard.	No.	2	87.00	174.00
18	G.I.Strip (25 X 3 mm)	Kg.	40	90.00	3600.00
19	G.I.Barbed Wire 'A' type.	Kg.	10	80.00	800.00
20	Concreting ration 1:3:6	Cmt.	2.3	4328.00	9954.40
21	Painting of Supports & fabricated materials	LS	2	178.00	356.00
22	Sundries	LS	1	886.00	886.00
23	DTC Metring with Box, single core L.T. XLPE cable (185 sq.mm., 200 mtr length) and other allied material.	No.	1	32687.00	32687.00

Cost of material

411319.40

Say Rs.

₹ 411,320.00

Prepared by,

Assistant Engineer,
M.S.E.D.C.Ltd,
Washim Division

Audited by

Dy. Manager (F&A)
M.S.E.D.C.Ltd,
Washim Division

Recommended / Checked by,

Dy.Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

Approved by,

Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

Technically Scrutinized
by (E) / Dy EE ()

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION COMPANY LIMITED

WASHIM CIRCLE

Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI AMANWADI RAILWAY STATION 1.3KW TO 120KW connection AT, village AMANWADI GAT NO under kinhiraja section, Malegaon S/Dn, Tq. Malegaon & Dist Washim

Item Code No. 6701

11 kV A.B. Switch 400 Amp without DP structure.

Sr.No	Description of Material	Unit	Qty.	Rate	Amount
1	11KV A.B. Switch, 400 A	Set	1	11642.00	✓ 11,642.00
2	M.S. Flats(50 X 10mm)	Kg	25	65.00	✓ 1,625.00
3	M.S.Channel 75x40x6 mm	Kg	42.6	70.00	✓ 2,982.00
4	Sundries	Set	1	886.00	✓ 886.00

Cost of material

₹ 17,135.00

Say Rs.

₹ 17,135.00

Prepared by,

JE
KINHIRAJA
Washim Division

Recommended / Checked by,

Dy.Executive Engineer ,
M.S.E.D.C.Ltd,
Washim Division

Audited by

Dy. Manager (F&A)
M.S.E.D.C.Ltd,
Washim Division

Approved by,

Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

[Signatures]
11/12
Dy. Manager (F&A)
M.S.E.D.C.Ltd,
Washim Division

MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO LTD. WASHIM DIVISION

Estimate for ADDITIONAL TF 200 KVA FOR LOAD EXTENSION IN RO SHRI AMANWADI RAILWAY STATION 1.3KW TO 120KW connection AT, village AMANWADI GAT NO under kinhiraja section, Malegaon S/Dn, Tq. Malegaon & Dist Washim

Three Phase/Single Phase Service Connection charges for New overhead Connections.

Service Connections		1 No.		RATE/UNIT	AMOUNT
S.NO.	PARTICULARS	UNIT	QTY		
1	Motive power up to 27 HP or other loads up to 20 kW.(Three Phase)	No	0	7790.00	-
2	Motive power above 27 HP but up to 107 HP or other loads above 20 kW but up to 80 kW.(Three Phase)	No	0	13640.00	-
3	Motive power above 107 HP but up to 201 HP or other loads above 80 kW but up to 160 kW.(Three Phase)	No	1	23380.00	23,380.00
4	For loads up to 0.5 KW.(Single Phase)	No	0	1410.00	-
5	For loads Above 0.5 KW and Up to 7.5 KW.(Single Phase)	No	0	1840.00	-
					₹ 23,380.00

Cost of material

Say Rs. ₹ 23,380.00

Prepared by,

JE
KINHIRAJA
Washim Division

Audited by

Dy. Manager (F&A)
M.S.E.D.C.Ltd,
Washim Division

Recommended / Checked by,

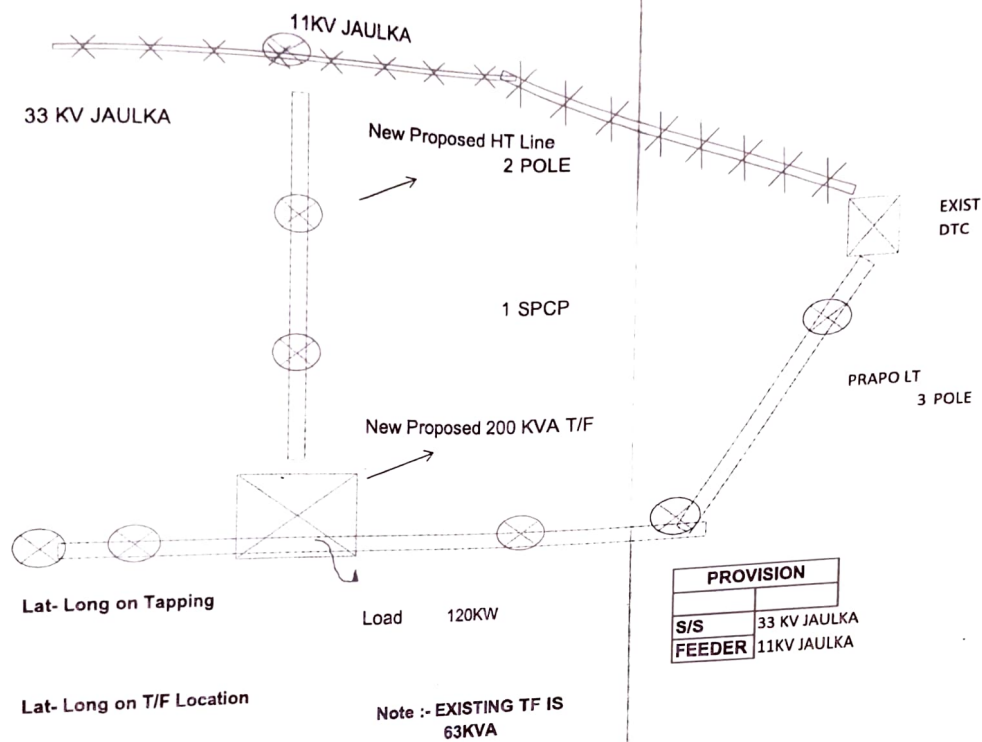
Dy.Executive Engineer ,
M.S.E.D.C.Ltd,
Washim Division

Approved by,

Executive Engineer,
M.S.E.D.C.Ltd,
Washim Division

[Signature]
AS (E) / Dy. EE (1)

4748367/2025/O/o SR DEE/M/NED/SCR



PROVISION		SPCP	TOTAL
HT	2	1	3
LT	3		
T/F	200		

INDEX	
Ext. 11 KV Line	X
Ext. LT Line	
Ext. T/F	
New proposed 11-KV Line	
New proposed LT Line	
New proposed T/F	

Apl No.

Capacity of Transformer :-
 Proposed load :-
 Existing of load :-
 Total load :-

[Signature]
 JUNIOR ENGINEER
 M.S.E.D.C.L.KINHIRAJA

120KW
 0
 120KW
[Signature]
 DY. EXECUTIVE ENGINEER
 M.S.E.D.C.L.MALEGAON

[Signature]
 EXECUTIVE ENGINEER
 M.S.E.D.C.L.WASHIM

Maharashtra State Electricity Distribution Co. Ltd.

Load Change/Demand Change

Acknowledgement

Application No. : 71479927

Consumer Category : LT-SUPPLY

Application Type : Change in Contract Demand with Load Change

Application Date : 04-Nov-2025

Consumer Number: 328730428907

Billing Unit : 1562

PC : 0

Name of Consumer : SHRI DIV.RAILWAY MANAGER RLY STN.

Address : KINHI RAJA DL 74 MALEGAON AMANA

Pin Code : 444105

Mobile Number : 9063303432

Existing Contract Demand: 10 KVA

Revised Contract Demand: 200 KVA

Existing Load: 1.3 KW →

Revised Load: 120 KW

(Signature with Office seal)

CHECK LOAD / CONTRACT DEMAND APPLICATION STATUS , PAY FIRM
QUOTATION / DEMAND NOTE AND UPLOAD DOCUMENTS.

Search by

Value

OP8J4V

Enter the above characters in the box

Generate OTP on Your Registered Mobile number (Click here)

Enter the OTP

Consumer Information	
Application ID	77479927
Application Date	04-Nov-25
Effective Date	07-Nov-25
Consumer No	129730420907
Consumer Name	SHRI DNYANANAY MANAGER RLY STN
Address	WASHIM NALVA OL. 74 MALEGAON ANKANN
Mobile No	9063034432
Category	Public Services
Service Type	Change in Contract Demand with Load Change
Supply Type	TR-SUPPLY
Revised Load	120 KW
Existing Contract Demand (KVA)	10
Revised Contract Demand (KVA)	200
Region Name/Zone Name	WASHIM REGION / AKOLA ZONE
Circle Name/Division Name	WASHIM CIRCLE / WASHIM DIVISION
Sub Division Name/ST	MALEGAON S.O.N. / 1582
No of Documents Online uploaded.	5
Application Status	Application in Process

UPLOAD DOCUMENTS FOR LOAD CHANGE/DEMAND CHANGE

First Document No file chosen

Instructions to upload document.	
1	Only files less than 300KB size are allowed
2	Only files in jpeg or pdf file are allowed
3	Use appropriate maximum number of settings while selecting to reduce the file size
4	File name should not contain any special character

Follow us on:   

DESIGN BY:  | Design by: www.mahatma.com
This work is licensed under a Creative Commons License