

**GENERAL TECHNICAL
SPECIFICATIONS**

FOR BUILDING WORKS

Name of Work- Construction of Community Hall at Village Lalavadar
Ta. Liliya Dist. Amreli

SEDG/GD

Name of Work :- Construction of Community Hall at Village Lalavadar Ta. Liliya Dist. Amreli

SPECIFICATIONS

Item No.	Item of work	Item No.	Page No.
	General Technical Specifications	Attached	
1	Excavation for foundation up to 1.5m depth including sorting out and staking of useful materials and disposing of the excavated stuff up to all lead hard Murrum.	Attached	
2	Providing and laying cement concrete 1:4:8 (1 cement, 4sand, 8 machine crushed stone aggregates 40 Mm.Nominal size)and curing complete, excluding cost of formwork in(a) Foundation and Plinth	Attached	
3	Providing and laying ordinary cement concrete1:1.5:3 (1cement,1.5sand, 3 gradedstone aggregates 20 mm.Nominal size) and finishing smooth with curing etc. complete excluding cost of form work and reinforcement for reinforced cement concrete work in in A) Foundations, footings, base of columns and mass concrete	Attached	
4	Providing and laying ordinary cement concrete1:1.5:3 (1cement,1.5sand 3 gradedstone aggregates 20 mm.Nominal size) and finishing smooth with curing etc. complete including the cost of formwork but excluding the cost of reinforcement of R.C.C. work in Column (iii) Having cross-sectional area ore than 0.085 Sq.M. and up to 0.12Sq.M.	Attached	
5	Brickwork using common burnt clay building brick shaving crushing strength not less than 35 KG/Sqcm. in foundation and plinth in cement mortar 1:5(1 cement , 5 fine sand) Conventional bricks	Attached	
6	Providing & laying C.C. 1:1 1/2:3 (1 cement , 1 1/2 course sand, 3 graded stone agg. of 20mm nominal size) and finishing smooth with curring etc. comp. incl. the cost of formwork but excl. the cost of reinforcement for R.C.C. work in. (A) Beam :- Having cross sectional Area 0.085 to 0.12 Sam upto floor all level	Attached	
7	Providing & laying ordinary Cement Concrete 1:1 1/2:3 (1 cement , 1 1/2 course sand, 3 graded stone agg. of 20mm nominal size) exposed work with curring etc. comp. incl. the cost of formwork but excluding the cost of reinforcement for R.C.C. work in. SLAB :- Having more then 10cm. and end upto 13cm thickness.upto floor all level	Attached	
8	Providing & laying ordinary C.C. 1:1 1/2:3 (1 cement , 1 1/2 course sand, 3 graded stone agg. of 20mm Nominal size) and for R.C.C. LINTELS incl. Finishing smooth with curring of formwork but excl. the cost of reinforcement. for above floor upto Floor all level	Attached	
9	Providing and laying cement concrete 1:1 1/2:3 (1 cement , 1 1/2 course sand, 3 graded stone add. of 20mm nominal size) for rein-forcement concrete CHHAJJAS not exceeding 10cm. thickness upto floor two level incl. finishing the exposed surface with C.M. 1:3 (1 cement , 3 fine sand) to give a smooth and ever surface, centering, formwork and curring comp.Excl. the cost of reinforcement.above plinth Upto floor all level.	Attached	
10	Thermo Mechanically treated bar F.E. 500 Steel reinforcement for R.C.C. work including bending, binding and placing in position complete upto floor all level	Attached	

Item No.	Item of work	Item No.	Page No.
11	Filling available excavated earth (excluding rock) in trenches. plinth, sides of foundations etc. in layers not exceeding 20 cm.in depth consolidating each disposed layer by ramming and watering	Attached	
12	Providing 15mm thick cement plaster in single coat on fair side of Brick/concrete walls for interior plastering upto floor two level and finished even and smooth in (i) Cement mortar 1:3 (1-cement:3-sand) .Upto floor all level	Attached	
13	Providing 10mm thick cement plaster in single coat on fair side of Brick/concrete walls for interior plastering upto floor all level and finished even and smooth in (i)Cement mortar 1:3 (1-cement:3-sand) .Upto floor all level finished even & Smooth with floating coat of neat cement slurry	Attached	
14	Providing and laying polished kota stone slab 25mm thick in risers of steps,skirting Dedo and pillars laid on 10mm thick cement mortar 1:3 (1-Cement : 3 coarse sand) and jointed with gray cement slury mixed with pigment to match the shade of slab including rubbing and polishing etc. complete	Attached	
15	Pro. /Fix. Steel door having of 40x40x5mm. Iron angle, & Double Shutter arrangement, shutter frame of 30x30x4mm. Iron Angle and B.G. 22 Gauge Plate with Hold fasts,Iron hinges, handles, stopper , locking arrangement etc. comp. Steel welded is built up section of oil painting over coat of primer coat etc. comp	Attached	
16	Providing and fixing window having extructed aluminum Colour anodized section frame main outer size 63.50 × 38.10 ×1.95 mm(of jindal Section no:4605,@ Wt 1.094 Kg/Rmt), horizontal two track member size 61.85 mm× 31.75 mm×1.20 mm (of jindal Section no:8687,@ Wt 0.695 Kg/Rmt), verticle member of size 61.85 mm× 31.75 mm×1.30 mm (of jindal Section no:8758 @ Wt 0.659 Kg/Rmt) with sliding shutter of horizontal member size 40 mm × 18 mm × 1.29 mm (of jindal Section no:8949 @ wt. of 0.456Kg/mt,verticle member of size 40 mm × 18 mm × 1.29 mm (of jindal Section no:8947 @ wt. of 0.456Kg/mt/ Section 8948,@ Wt 0.457 Kg/mt) with 5 mm thick transparent bronze colour tinted float glass with powder coated aluminum fitting and fixtures and transparent silicon sealent glass fixing to frame as per details etc complete for window.	Attached	
17	Distempeing(Twocoats) with oil bound distemper of approved brand and manufacture and of required shade on wall surfaces to give an even shade, over and including a priming coat with distemper primer of approved brand and manufacture after thoroughly brushing the surface free from mortar dropping and other foreign matter and also including preparing the surface even and sand papered smooth.	Attached	
18	Finishing wall with weather proof exterior emulsion paint on wall surface (two coats) to give an required shape even shade after thoroughly brushing the surface to remove all dirt, and remains of loose powdered materials.etc complete.	Attached	
19	Providing and fixing PVC rain water spout of 50mm dia. and 30cm length.	Attached	
20	Providing and laying broken chine mosaic flooring for terrace using 12 mm to 20 mm broken pieces of glazed tiles to be laid over cement mortar 1:3 to plain or slope and to be tempered to bring mortar creme out upto surface using white cement including rounding off junctions and extending them upto 15 cm along the wall,clearing with water and oxalic acid etc. as directed.	Attached	

Item No.	Item of work	Item No.	Page No.
21	Box cutting the road surface to proper slope and camber for making a base for road work including removing the excavated stuff and depositing on the excavated stuff and depositing on the road side slope as directed upto all lead.	Attached	
22	Providing and interlocking CC Paving block in every square meters as per selected size and shape and 80 M-200 without pigmentation the blocks will be rubber moulded of uniform straight edges. even colour and without any damages the paving blocks will be laid in pattern specification packed, in different colour in half thickness will filled in a clean manner finished with edge detailing as specified paver blocks will be laid dry on a layer of sand of finished 50MM thick with wooden mallet or rubber hammer the rates are excl. edge dataling rubble soling bed as required.	Attached	
23	Providing and laying C.C. 1:2:4 (1 cement, 2 coarse sand , 4 graded stone agg. 20mm Nominal size) and curring comp. excluding cost of forwork in. (A) foundation and plinth.	Attached	
24	Point wiring for FAN with 2-1.5 sq.mm & earthwire of 1.5 sq.mm (Green) both are of ISI marked 1.1 KV Grade FRLS PVC insulated multistrand copper wires, in following type of pipe to be erected concealed in flush on wall/ceiling complete with 6A Modular type switch and hum free EME four or more step type electronic fan regulator with separately mounted and accessories with earth continuity of following type, erected on PVC / Metallic box, single mounting base frame covered with textured/metalic front plate modules erected on / in wall / ceiling as per pipe erected, with necessary ceiling rose /H.D.Connector as directed.(a) with medium class Rigid PVC pipe and accessories Cat-III	Attached	
25	Point wiring for Light /Bell with 2-1.5 sq.mm (Green) both are of ISI marked 1.1 KV Grade FRLS PVC insulated multistrand copper wires, in following type of pipe to be erected conceal in/on surface on wall/ceiling complete with 6A Modular type switch / bell push & accessories and earth continuity of following type, erected on PVC / Metallic box, single mounting base frame covered with textured/metalic front plate modules erected on / in wall / ceiling as per pipe erected, with necessary Lamp holder/ceiling rose / H.D.Connector as directed.(a) with medium class Rigid PVC pipe and accessories Cat-III	Attached	
26	Providing & Erecting approved make ceiling Fan with double ball bearing ISI mark with codencer 230 Volt A.C. 50 c/s ,1200MM sweep complete having 3 blades with alluminium blades with canopy & 30 Cms down rod erected on existing hook or clamp with 24/0.2, 3 core flexible wire with earthing (Make shall be app. by enginner in charge)	Attached	

Item No.	Item of work	Item No.	Page No.
27	Supplying and erecting LED indoor fittings with LEDs of wattage 0.2 watt to 0.5 Watt assembled on single MCPCB, with housing used as a heat sink shall be made of thick sheet conforming to IS:513/CRCA polyester powder coated and high U.V. & corrosion resistance with diffuser and/or polycarbonate optics with company mark/name 120 to 300 V, Power Factor more than 0.9, THD < 10 %, CCT 4000 K to 6500K, Uniformity ratio >0.7, Luminaire efficiency > 85 lumens/watt, LED driver efficiency > 85 % CREE / OSRAM / PHILIPS Lumileds / NICHIA / SEOUL/ Bridgelux (U.S.A.) make LED used for luminaire. (Each fitting required LM-79 & LM-80 Certificates)(B) LED Lamps intgra Type, cool white with PC diffuser suitable for B22 LAMP holder(b) 5 to 10 watts	Attached	
28	Point wiring for individual Plug with & Earth wire of FRLS PVC insulated multistrand copper wires, in following type of pipe to be erected concealed in / surface of wall/ ceiling complete with Modular type switch and 5 Pin plug erected on PVC/ Metallic box covered with appropriate front plate modules erected on / in wall/ ceiling as per pipe erected with following type of (I) For 6A Plug with 2-1.5 Sq.mm Cu.wire (a) With medium class rigid PVC Pipe and accessories Cat-III	Attached	
29	Providing & Fixing marble Takti as directed	Attached	

()
Deputy Executive Engineer
Panchayat R.& B. Sub Division
Amreli

()
Executive Engineer
Panchayat R.& B. Division
Amreli

SPECIFICATIONS OF MATERIALS

- 1.1 Water shall not be salty brackish and shall be clean, reasonably clear and free objectionable quantities of silt and traces of oil injurious alkalies, salts, organic matter and other deleterious material which will either weaken the mortar of concrete or cause efflorescence or attack the steel in R.C.C. Container For transport, storage and handling of water shall be clean Water shall conform to the standard specified in I.S. :456-1978.
- 1.2 If required by the Engineer in charge it shall be tested by comparison with distilled water Comparison shall be made by means of standard cement tests for soundness time of setting ad mortar strength as specified in I.S. 269-1976. Any indication of unsoundness, charge in time of setting by 30 minutes or more or decrease of more than 10 per cent in strength of mortar pre appeared with water sample when compared with results obtained with mortar prepared with distilled water shall be sufficient cause for rejection of water under test.
- 1.3 Water for curing mortar, concrete or masonry should not be too acidic or too alkaline. It shall be free of elements which significantly affect the hydration reaction or otherwise interfere with the hardening of mortar or concrete during curing of those which produce objectionable stains of their unsightly deposits o concrete or mortar surfaces
- 1.4 Hard and bitter water shall not be used for curing
- 1.5 Potable water will generally found suitable curing mortar or concrete.

M-2 Lime.

- 2.1 Lime shall be hydraulic lime as per (I.S. 712-1973) Necessary tests shall be carried out as per I.S. 6932(parts I to X)1973.
- 2.2 The following field tests are to be carried out :
 - (1) A very rough idea can be formed about the type of lime by its visual examination i.e. fat lime bears pure white color, lime in for of porous lumps of dirty white color indicates quick lime and solid lumps are the un-burnt lime stone.
 - (2) Acid tests for determining the carbonate content in lime Excessive amount of impurities and rough determination of class of lime.
- 2.3 Storage shall comply with I.S. 712-1973. The slaked lime, if stored shall be kept in a weather proof and damp-proof shed with impervious floor and sides to protect it against rain, moisture, weather and extraneous materials mixing with it. All lime that has been damaged in any way shall be rejected and all rejected materials shall be removed from site of work.
- 2.4 Field testing shall be done according to I.S.1624-1974 to show the acceptability of materials.

M-3 Cement.

3.1 Cement shall be ordinary Portland slag cement as per I.S. 269-1976 OR Portland slag cement as per I.S. 455-1976.

M-4 White Cement.

4.1 The white cement shall conform to I.S. 8042-E-1978.

M-5. Colored Cement

5.1 Colored cement shall be with white of grey Portland cement as specified in the item of the work.

5.2 The pigments used for colored cement shall be of approved quality and shall not exceed 10% of cement used in the mix. The mixture of pigment and cement shall be properly ground to have a uniform color and shade.

5.3 The pigments shall have such properties as to provide for durability under exposure to sunlight and weather. The pigment shall have the property such that it is neither affected by the cement nor detrimental to it.

M-6 Sand.

6.1 Sand shall be natural sand, clean, well graded, hard strong, durable and gritty particles free injurious amounts of dust, clay kankar nodules, soft or flaky particles shall, alkali salts organic matter, loam, mica or other deleterious substances and shall be got approved from the Engineer-in-Charge. The sand shall not contain more than 8 percent of silt as determined by field test. If necessary the sand shall be washed to make it clean.

6.2 Coarse Sand : The fineness modulus of coarse sand shall not be less than 2.5 and shall not exceed 3.0. The sieve analysis of coarse shall be as under :

I.S. Designation	Sieve passing sieve	Percentage weight Designation	by	I.S. Sieve percentage by weight passing sieve.
4.75 mm.	100	600 Micron		30-100
2.36 mm.	90 to 100	300 Micron		5-70
1.18 mm.	70 to 100	150 Micron		0-50

6.3 Fine Sand :

The fineness modulus shall not exceed 1.0. The sieve analysis of fine sand shall be as under :

I.S. Designation	Sieve passing sieve	Percentage weight	by Designation	I.S. Designation	Sieve by weight	percentage passing
4.75 mm.	100	600 Micron		40-85		
2.36 mm.	100	300 Micron		5-50		
1.18 mm.	75 - 100	150 Micron		0-10		

M-7 Stone Dust

- 7.1** This shall be obtained from crushing hard black trap of equivalent. It shall not contain more than 8 % of silt as determined by field test will measuring cylinder. The method of determining silt contents by fields test is given as under.
- 7.2** A sample of stone dust to be tested shall be placed without drying in 200 mm. measuring cylinder. The quality of the sample shall be such that it fills the cylinder up to 100 mm. mark. The clean water shall be added up to 150 mm. mark. The mixture shall be stirred vigorously and the content allowed to settle for 3 hours.
- 7.3** The height of silt visible as settled layer above the stone dust shall e expressed as percentage of the height of the stone dust below. The stone dust containing more than 8 % silt shall be washed so as to bring the content within the allowable limit.
- 7.4** The fineness modules of stone shall not be less than 1.80.

M-8 Stone Grit.

- 8.1** Grit shall consist of crushed or broken stone and be hard, strong, dense, durable, clean of proper gradation and free from skin or coating likely to prevent proper adhesion of mortar. Grit shall generally be cubical in shape and as far as possible flakey elongated pieces shall be avoided. It shall generally comply with the provisions of I.S. 383-1970. unless special stone of particular quarries is mentioned grit shall be obtained from the bet black trap or equivalent hard stone as approved by the Engineer in charge. The grit shall have not deleterious with cement.

The grit shall conform to the following gradation as per sieve analysis :

8.2

I.S. Designation	Percentage by weight passing sieve.	I.S. Designation	Sieve	Percentage by weight passing sieve.
12.50 mm.	100	600 Micron		0-20 %
10.00 mm.	85 - 100	300 Micron		0-25

- 8.3** The crushing strength of grit will be such as to allow the concrete in which it used to build up the specified strength of concrete.
- 8.4** The necessary tests for rit shall be carried out as per the requirements of I.S.2386- (PARTS-I TO VIII)1963, as per instructions of the Engineer in charge. The necessity of test will be decided by the Engineer in charge.

M-9 Cinder

- 9.1** Cinder is well burnt furnace residue which has been fused or sintered into lumps of varying sizes.

9.2 Cinder aggregates shall be well burnt furnace residue obtained from furnace using coal fuel only it shall be sound clean and free from clay, dirt, ash or other deleterious matter.

9.3 The average grading for cinder aggregates shall be as mentioned below :

I.S. Sieve Designation	Percentage passing sieve.	I.S. Sieve Designation	Percentage passing
20.00 mm.	100	4.75 mm.	70%
10.00 mm.	86	2.36 mm.	52%

M-10 Lime Mortar

10.1 Lime : Lime shall conform to specification M-2 Water shall conform to specification M-1 Sand. Sand shall conform to specification M-6.

10.2 Proportion of Mix :

10.2.1. Mortar shall consist of such proportions of slaked lime and sand as may be specified in item. The slaked lime & sand shall be measured by volume.

10.3 Preparation of mortar

10.3.1 Lime mortar shall be prepared by wet process as per I.S. 1625-1971. Power driven mill shall be used for preparation of lime mortar. The slaked lime shall be placed in the mill in an even layer and ground for 180 revolutions with a sufficient water. Water shall be added as required during grinding (care being taken not to add more water) that will bring the mixed material to a consistency of stiff past. Thoroughly wetted sand shall then be added evenly and the mixture ground for another 180 revolutions.

10.4 Storage :

10.4.1 Mortar shall always be kept damp, protected from sun and rain till used up, covering it by tarpaulin or open sheds.

10.5 Use :

10.5.1. All mortar shall be used as soon as possible after grinding. It should be used on the day on which it prepared. But in no case mortar made earlier than 36 hours shall be permitted for use.

M-11 Cement Mortar

11.1 Water shall conform to specification M-1 Cement. Cement shall conform to specifications M-3 sand. Sand shall conform M-6.

11.3 Proportion of Mortar :

11.3.1. In hand mixed mortar, cement and sand in the specified proportions shall be thoroughly mixed dry on a clean impervious platform by turning over at least 3 times or more till a homogeneous, mixture of uniform color is obtained. Mixing platform shall be so arranged that no deleterious extraneous material shall get mixed with mortar or mortar shall flow out. While mixing the water shall be gradually added and thoroughly mixed to form a stiff plastic mass of uniform color so that each particle of sand shall be completely covered with a film of wet cement. The water cement ratio shall be adopted as directed.

11.3.2 The mortar so prepared shall be used within 30 minutes of adding water. Only such quantity of mortar shall be prepared as can be used within 30 min.

M-12 Stone Coarse Aggregate For Nominal mix Concrete.

12.1 Coarse aggregate shall be of machine crushed stone of black trap or equivalent and be hard strong dense, durable clean and free from skin and coating likely to prevent proper adhesion of mortar.

12.2 The aggregate shall generally be cubical in shape. Unless special stones of particular quarries are mentioned aggregates shall be machine crushed from the best black trap or equivalent hard stone as approved. Aggregate shall have no deleterious reaction with cement. The size of the coarse aggregate for plain cement and ordinary reinforced cement concrete shall generally be as per the table given below. However, in case of reinforced cement concrete the maximum limit may be restricted to 6mm. less than the minimum lateral clear distance between bars or 6mm. less than cover whichever is smaller.

TABLE

I.S. Sieve Designations	Percentage passing for single Sized aggregates of Nominal size			I.S. Sieve Designation	Percentage passing for single Sized aggregates of Nominal size		
	40 mm.	20 mm.	16		40 mm.	20 mm.	16
	-	-	-	12.5 mm.	-	-	-
80 mm.	100	-	-	10 mm.	0.5	0.2	0.3
63 mm.	85-100	100	-	4.75 mm.	-	0.5	0.5
40 mm.	20	85-100	100	2.35 mm.	-	-	-
20 mm.		85-100			mm.		
16 mm.	mm.						

Note : This percentage may be varied some what by the Engineer in charge when considered necessary for obtaining better density and strength of concrete.

12.3 The grading test shall be taken in the beginning and at the change of source of materials. The necessary tests. Indicating I.S.:383-1970 and 456-1978 shall have to be carried out to ensure the acceptability. The aggregates shall be stored separately and handled in such a manner as to prevent the intermixing of different aggregates. if the aggregates are covered with dust, they shall be washed with water to make them clean.

M-13 Black Trap or Equivalent Hard Stone Coarse

13.1 Aggregates For Design Mix Concrete : Coarse aggregate shall be of machine crushed stone of black trap of equivalent hard stone and be hard, strong, dense, durable, clean and free from kin and coating likely to prevent proper adhesion of mortar.

13.2 The aggregates shall generally be cubical in shape. Unless special stones of particular quarries are mentioned, aggregates shall be machine crushed from the best, black trap or equivalent hard stones as approved. Aggregate shall have no deleterious with cement.

13.3 The necessary tests indicated in I.S. 383-1970 and I.S. 456-1978 shall have to be carried out to ensure the acceptability of the material.

13.4 If aggregate is covered with dust it shall be washed with water to make clean.

M-14 Brick Bats Aggregates :

14.1 Brick bat aggregate shall be broken from well burnt or slightly over burnt and dense bricks. It shall be homogeneous in texture, roughly cubical in shape, clean and free from dirt of any other foreign material. The brick bats shall be of 40mm. 50 mm. size unless otherwise specified in the item. The under burnt or over burnt brick bats shall not be allowed.

14.2 The brick bats shall be measured by suitable boxes or as directed.

M-15 Bricks

15.1 The bricks shall be hand or machine moulded and made from suitable soils and kiln burnt. They shall be free from cracks and flaws and modules of free lime. They shall have smooth rectangular faces with sharp corners and shall be of uniform color.

The bricks shall be moulded with a frog of 100 mm. x 40 mm. and 10 mm. to 20mm. deep on one of its flat sides. The bricks shall not break when thrown on the ground from a height of 600 mm.

15.2 The size of modular bricks shall be 190 mm. x 90 mm. x 90 mm.

15.3 The size of conventional bricks shall be as under :

(9" x 4 3/8" x 2 3/4") 225 x 110 x 75 mm.

15.4 Only bricks of one standard size shall be used on one work. The following tolerance shall be permitted in the conventional size adopted in a particular work. Length + 1/8" (3.0 mm) Width + 1/16" (1.50 mm.) Height + 1/16" (1.50 mm.)

15.5 The crushing strength of the bricks shall not be less than 35 kg/sq. cm. The average water absorption shall not be more than 20 percent by weight Necessary tests for crushing strength and water absorption etc. shall be carried out as per I.S. 3495 (Part-I to IV)-1976.

M-16 Stone.

16.1 The stone shall be of the specified variety such as Granite/Trap Stone/Quartzite or any other type of good hard stones. The stones shall be only from defects like cavities, cracks, sand holes, flaws injurious veins, patches of loose or soft materials and strength. The stone with round surface shall not be used. The percentage of water absorption shall not be more than 5% of dry weight. When tested in accordance with I.S. 1124-1974. The minimum crushing strength of stone shall be 200 Kg./Sq. Cm. unless otherwise, specified.

16.2 The sample of the stone to be used shall be got approved before the work is started. **16.3** The khanki facing stone shall be dressed by chisel as specified in the item for khanki facing required shape and size. The face of the stone shall be so dressed that the bushing on the exposed face shall not project by more than 40 mm. from the general wall surface and on face to be plastered it shall not project by more than 19 mm. nor shall it have depressions more than 10 mm. from the average wall surface.

M-17 Laterite Stone.

17.1 Laterite stone shall be obtained from the approved quarry. It shall be compacted in texture sound, durable and free from soft patch. It shall have minimum crushing strength of 100 Kg./Sq. Cm. in its dry condition. It shall not absorb water more than 20% of its own weight, when immersed for 24 hours in water after quarrying, the stone shall be allowed to weather for some time before using in work.

17.2 The stone shall be dressed into regular rectangular blocks so that all faces are free from waviness and unevenness, and the edges true and square.

17.3 Those types of stone in which white clay occurs should not be used.

17.4 Special corner stones shall be provided where so directed.

M-18 Mild Steel Bars

18.1 Mild steel bars reinforcement for R.C.C. work shall conform I.S. 432(Part-II)1966 and shall be of tested quality. It shall also comply with relevant part of I.S. 456-1978.

18.2 All the reinforcement shall be clean and free from dirt, paint, grease, mill scale or loose or thick rust at the time of placing.

18.3 For the purpose of payment, the bar shall be measured correct up to 10 mm. length and weight payable worked out at the rate specified below.

1.	6 mm.	0.22 Kg./Rmt.	8.	20 mm.	2.47 Kg./Rmt.
2.	8 mm.	0.39 Kg./Rmt.	9.	22 mm.	2.98 Kg./Rmt.
3.	10 mm.	0.62 Kg./Rmt.	10.	25 mm.	3.85 Kg./Rmt.
4.	12 mm.	0.89 Kg./Rmt.	11.	28 mm.	4.83 Kg./Rmt.
5.	14 mm.	1.21 Kg./Rmt.	12.	32 mm.	6.31 Kg./Rmt.
6.	16 mm.	1.58 Kg./Rmt.	13.	36 mm.	7.99 Kg./Rmt.
7.	18 mm.	2.00 Kg./Rmt.	14.	40 mm.	9.86 Kg./Rmt.

M-19 High Yield Strength Deformed Bars

19.1 High yield strength steel deformed bars shall be either cold twisted other rolled and shall conform to I.S. 1786-1966 and I.S. 1139-1966 respectively.

19.2 Other provisions and requirements shall conform to specification No. M-18 for Mild Steel Bars.

M-20 High Tensile Steel Wires.

20.1 The high tensile wires for use in prestressed concrete work shall conform to I.S. 2090- 1962.

20.2 The tensile strength of the high tensile steel bars shall be as specified in the item. In absence of the given strength the minimum strength shall be taken as per para 6-1 of the I.S. 1785-1962. Testing shall be done as per I.S. requirements.

20.3 The high tensile steel shall be free from loose mill scale, rust, oil, grease, or any other harmful matter. Cleaning of steel bars may be carried out by immersion in solvent solution, wire brushing or passing through a pressure box containing Carborundum.

20.4 The high tensile wire shall be obtained from manufactures in coils having diameter not less then 350 times the diameter of wire itself so that wire springs back straight on being uncoiled.

M-21 Mild Steel Binding Wire

21.1 The mild steel wire shall e of 1.63 mm. or 1.22 mm. (16 to 18 gauge) diameter and shall conform t I.S. 280-1972,

21.2 The use of black wire will be permitted for binding reinforcement bars. It shall be free from rust, oil paint, grease, loose mill scale or any other undesirable coating which may prevent adhesion of cement mortar.

M-22 Structural Steel

22.1 All structural steel shall conform to I.S. 226-1985. The steel shall be free from the defects mentioned in I.S. 226-1975 and shall have a smooth finish. The material shall be free from loose mill scale, rust pits or other defect affecting the strength and durability. River bars shall conform to I.S. :1148-1973.

22.2 When the steel is supplied by the Contractor test certificate of the manufacturer shall be obtained according to I.S. 226-1975 and other relevant Indian Standards.

M-23. Galvanized Iron Sheets

23.1. The galvanized iron sheets shall be plain or corrugated sheets of gauges as specified in item. The G. I. Sheets shall conform to I.S. 277-1977. The sheets shall be undamaged in carriage and handling either by rubbing off of zinc coating or otherwise. The shall have clean and bright surface and shall be free from dents, bends, holes, rust white powdery deposit.

23.2. The length and width of G.I. sheets shall be as directed as per site condition.

M-23.A : G.I. Valleys gutter, ridges

23.A.2. Valleys gutters and flashings shall also be of galvanized sheet of thickness as specified in item. Valleys shall be 900 mm. wide overall and flashing shall be 380 mm. wide overall. They shall be bent to the required shape without damage to the sheet in the process of bending.

M-24. Asbestos Cement Sheets

24.1. Asbestos cement sheets plain, corrugated or semi corrugated shall conform to I.S. 459-1970. The thickness of the sheets shall be as specified in the item. The sheets shall be free from all defects such as cracks, holes, deformities, chipped edges or otherwise damaged.

24.2. Ridges & Hips :

24.2.1. Ridges and hips shall be of same thickness as that of A.C. sheets. The types, of ridges shall be suitable for the type of sheets and location.

24.2.2. Other accessories to be used in roof such as flashing pieces, eaves filler pieces, valley gutters, northern light and ventilator curves, barge boards etc. shall be of standard manufacture and shall be suitable for the type of sheets and location.

M-25. Mangalore Pattern Roof Tiles

25.1. The Mangalore pattern tiles shall conform to I.S. 654-1972 for Class AA or Class A type as specified in item. Samples of the tiles to be provided shall be got approved from the Engineer-in-Charge. Necessary tests shall be carried out as directed.

M-26. Shuttering.

26.1. The shuttering shall be either of wooden planking of 30 mm. minimum thickness with or without steel lining or of steel plates stiffened by steel angles. The shuttering shall be supported on battens and beams and props of vertical ballies properly cross braced together so as to make the centering rigid. In places of bulbie props, brick pillar of adequate section built in mud mortar may be used.

26.2. The form work shall be sufficient strong and shall have camber, so that it assumes correct shape after deposition of the concrete and shall be able to resist forces caused by vibration of live load of men working over it and other incidental loads associated with it. The shuttering shall have smooth and even surface and its joints shall permit leakage of cement grout.

CUMMUNITY HALL

26.3. If at any stage of work during or after placing concrete in the structure the form work sags or bulges out beyond the required shape of the structure. The concrete shall be removed and work redone with fresh concrete and adequately rigid form work. The complete form work shall be got inspected by and got approved from the Engineer in charge, before the reinforcement bars are placed in position.

26.4. The props shall consist of bulbies having 100 mm. min. diameter measured at mid length and 80 mm. at thin end shall be placed as per design requirement. These shall rest squarely on wooden sole plates 40 mm. thick and min. bearing area of 0.10 sq. m. laid on sufficiently hard base.

26.5. Double wedges shall further be provided between the sole plate and the wooden props so as to facilitate tightening and easing of shuttering without jacking the concrete.

26.6. The timber used in shuttering shall not be dry as to absorb water from concrete and swell or bulge nor so green or wet as to shrink after erection. The timber shall be properly sawn and planed on the sides and the surface coming in contact with concrete. Wooden form work with metal sheet lining or steel plates stiffened by steel angles shall be permitted.

26.7. As far as practicable clamps shall be used to hold the forms together and use of nails and spikes avoided.

26.8. The surface of timber shuttering that would come in contact with concrete shall be well wetted and coated with soap solution before the concreting is done. Alternatively coat of raw linseed oil or oil of approved manufacture may be applied in place of soap solution. In case of steel shuttering either soap solution or raw linseed oil shall be applied after thoroughly cleaning the surface under no circumstances black or burnt oil shall be permitted.

26.9. The shuttering for beams and slabs shall have camber of 4 mm. per meter (1 in 250) or as directed by the Engineer in charge so as to offset the subsequent deflection. For cantilevers, the camber at free end shall be 1/50 of the projected length or as directed by the Engineer in charge.

M-27. Expansion Joints- Pre-molded filler

27.1. The item provides for expansion joints filler shall not get deformed or broken by twisting bending or other handling when exposed to atmospheric condition. Pieces of roof joints filler that have been damaged shall be rejected.

27.3. Thickness of the pre-molded joints filler shall be 25 mm. unless otherwise specified. **27.4.** Pre-molded

bituminous joints filler shall conform to I.S. 1838-1961.

M-28. Expansion joints-copper strips and hold fasts

28.1. The item provide for expansion joints in R.C.C. frame structure for internal joints, as well as exposed joints, with the use of pre-molded bituminous joints filler.

28.2. Copper sheet shall be of 1.25 mm. width and or 1.25 mm. width and the “U” shape in the middle. Copper strip shall have holdfast of 3mm. diameter copper rod fixed to the plate soldered on strip at intervals of about 30 cm. r as shown in the drawing or as directed. The width of each flange (horizontal side) of the copper plate to be embedded in the concrete work shall be 25 mm depth of “U” to be provided in the expansion joint, in the copper plate shall be of 25 mm.

M-29. Teak wood

29.1. The teak wood shall be of good quality as required for the item to be executed. When the kind of wood is not specially mentioned, good Indian teak wood as approved shall be used.

29.2. Teak wood shall generally be free from large, lose dead or cluster knots flaws shakes, warps, twists, bends or any other defects. It shall generally be uniform in substance and of straight fibers as far as possible. It hall be free from not decay, harmful fungi and other defects of harmful nature which will affect the strength, durability or its usefulness for the purpose for which it is required. The color shall be uniform as far as possible. Any effort like paining using any adhesive materials made to hide the defects shall render the pieces liable to rejection by the Engineer in charge.

29.3. All scantlings, planks etc., shall be sawn in straight lines and planes in the direction of grains and of uniform thickness.

29.4. The tolerances in the dimensions shall be allowed at the rates of 1.5 mm. per face to be planed.

29.5. First class teak wood shall have no individual hard and sound knots, more than 6 sq. cm in size and the aggregate area of such knots shall not be more than 1 % of area of piece. The timber shall be closed grained.

29.6. Second Class Teak Wood :

29.6.1. No individual hard and sound knots shall be more than 15 sq. cms. and in size aggregates area of such knots shall be not exceed 2 % of the area of piece.

M-29. A Non-teak wood :

The non teak wood shall be chemically treated, seasoned as per I.S. Specifications and of good quality. The type of wood shall be got approved before collecting the same on site Fabrication of wooden members shall be started only after approval.

CUMMUNITY HALL

For this purpose wood of Bio, kalai, Sires Saded Behda, Jamun, Sisoo will be used for door where as only Kalai, Sires, Halda, Kalam etc. will be permitted for shutters after proper seasoning and chemical treatment.

The non teak wood shall be free from large, loose dead of cluster knots, flows, shakes, warps, bends or any other defects. Its shall be uniform in substance and of straight fibers as far as possible. It shall be free from rots, decay, harmful fungi and other defects of nature which will effect the strength, durability or its usefulness for the purpose for which it is required. The color of wood shall be uniform as far as possible. The scantalings planks etc. shall be saw in straight lines and planes in the direction of grain and of uniform thickness. The department will use the Agency to produce certificate from Forest Department in event of dispute and the decision of the department shall be final and binding to the contractor. The tolerance in the dimension shall be allowed at 1.5 mm. per face to be planed.

M-30. Wooden flush door shutters (solid core)

30.1. The solid core type flush door shutters shall be of decorative or non decorative type as specified in the drawing. The size and thickness of the shutter shall be as specified in drawings or as directed. The timber species for core shall be as specified in drawings or as directed. The timber species for core shall be used as per I.S. 2202(Part-1)1980. The timber shall be free from decay and insect attack, knots and knot holes less than half the width of cross section of the members in which they occur may be permitted. Pitch pockets, pitch streaks and harmless pin holes shall be permissible except in the exposed edges of the core members. The commercial plywood cross-bands shall conform to I.S. 303-1275.

30.2. The face panel of the shutters shall be formed by gluing by the the hot press process on both faced the core with either plywood or cross-bands and face veneers. The hopping rebating opening of glazing venation etc., shall be provided if specified in the drawing.

30.3. All edges of the door shutters shall be square. The shutters shall be free from twist or warp in its plane. Both faces of the shutters shall be sand papered to smooth even texture.

30.4. The shutters shall be tested for-

(1) End immersion test : The test shall be carried out as per I.S. 2202-(Part-1)1980. There shall be not delamination at the end of the test.

(2) Knife Test : The face panel when tested in accordance with I.S. 1659-1979 shall pass the test.

(3) Glue adhesion test : The flush door shall be tested for glue adhesive testi in accordance with I.S. 2202(part-1)1980. The shutters shall be considered to have passed the test if no delamination occurs in the glue lines in the plywood and if no single delamination more than 80 mm. in length and more than 3 mm. in depth has occurred in the assembly glue lines between the plywood face and the style and rail. Delamination at the corner shall be measured corner shall be measured continuously around the corner. Delamination at the knots, knot hole and other permissible wood defects shall not be considered in assessing the sample.

30.5. The tolerance in size of slid core type flush door shall be as under :

In Nominal thickness ± 1.2 mm. In Nominal height ± 3 mm.

30.6. The thickness of the shutter shall be uniform throughout with a permissible variation of not more than 0.8 mm. when measured at any two points.

M-31. Aluminum doors, windows ventilators

31.1. Aluminum alloy used in the manufacture of extruded window sections shall conform to I.S. DESIGNATION HEA-WP of I.S. 733-1975 and also to I.S. Designation WVG-WP of I.S. 1285-1975. The section shall be as specified in the drawing and design. The fabrication shall be done as directed.

31.2. The hinges shall be cast or extruded aluminum hinges of same type as in window but of larger size.

31.3. The hinges shall normally be of 50 mm. projecting type Non-projecting type of hinges may also be used if directed. The handles of door shall be of specified design. A suitable lock for the door operable either from outside or inside shall be provided in double shutter door, the first closing shutter shall have concealed aluminum alloy bolt at top and bottom.

M-32. Rolling Shutters

32.1. The rolling shutters shall conform to I.S. 6248-1979. Rolling shutters shall be supplied of specified type with accessories. The size of the rolling shutters shall be specified in the drawings. The shutters shall be specified in the drawings. The shutters shall be constructed with interlocking path sections formed from cold rolled steel strips not less than 0.9 mm. thick and 80 mm. wide for shutters up to 3.5 m. width not less than 1.25 mm. thick and 80 mm. wide for shutters 3.5 m. in width and above unless otherwise specified.

32.2. Guide channels shall be of mild steel deep channel section and of rolled pressed or built up (fabricated) joinless construction. The thickness of sheet used shall not be less than 3.15 mm.

32.3. Hood covers shall be made of M.S. Sheets not less than 0.90 mm. thick. For shutters having width 3.5 Meter and above, the thickness of M.S. sheet for the hood cover shall not be less than 1.25 mm.

32.4. The spring shall be of best quality and shall be manufactured from tested high tensile spring steel wire of strip of adequate strength to balance the shutters in all position. The spring pipe shaft etc. shall be supported on strong M.S. of malleable C.I. brackets. The brackets shall be fixed on or under the lintel as specified with crawl plugs and screws bolts etc.

CUMMUNITY HALL

32.5. The rolling shutters shall be of self rolling up to 8 sq. m. clear area without ball bearing and up to 12 sq. m clear area with ball bearing. If the rolling shutters are of larger, then gear operated type shutters shall be used.

32.6. The locking arrangement shall be provided at the bottom of shutter at both ends. The shutters shall be opened from outside.

32.7. The shutters shall be completed with door suspension shafts, pulling hooks, looking arrangements handles and other accessories.

M-33. Collapsible Steel Gate

33.1. The collapsible steel gate shall be in one or two leaves and size as per approved drawings or as specified. The gate shall be fabricated from best quality mild steel channels, flats etc. Either steel pulleys or ball bearings shall be provided in every double channel. Unless otherwise specified the particulars of collapsible gate shall be as under. :

(a) Pickets : These shall be of 20 mm. M.S. channels of heavy sections unless otherwise shown on drawings. The distance centre to centre of pickets shall be 12 cms. with an opening or 10 cms.

(b) Pivoted M.S. flats shall be 20 mm. x 6 mm.

(c) Top and bottom guides shall be from tee or flat iron of approved size.

(d) The fittings like stoppers fixing, locking cleats, brass handles and cast iron rollers shall be of approved design and size.

M-34. Welded Steel Wire Fabric

34.1. Welded steel wire fabric for general purpose shall be manufactured from cold drawn steel wire. “as draw” or galvanized steel conforming to I.S. 226-1975. With longitudinal and transverse wire securely connected at every intersection by a process of electrical resistance welding and conforming to I.S. 4948-1974. It shall be fabricated and finished in workmanlike manner and shall be free from injurious defects and shall be rust proof. The type of mesh shall be oblong or square as directed. The mesh sizes and sizes if wire for square as well as oblong welded steel wire fabric shall be as directed. The steel wire fabric in panels shall be in one whole piece I each panel as far as stock sizes permit.

M-37. Plywood

37.1. The plywood for general purpose shall conform I.S. 303-1975.

CUMMUNITY HALL

Plywood is made by cementing together then boars or sheets of wood into panels. There are always an odd number of layers 3,5,7,9, ply etc. The plies are placed so that grain of each layer is at right angles to the grain in the adjacent layer.

37.2. The chief advantages of plywood over a single board of the same thickness is the more uniform strength of the plywood, along the length and width of the plywood and greater resistance to cracking and splitting with change in moisture content.

37.3. Usually synthetic resins are used to gluing, phenolic resins are usually cured in a hot press which compresses and simultaneously heats the plies between hot plates which maintain a temperature of 90 degree C to 140 degree C and a pressure of 11 to 14 kg./sq. Cm. on the wood. The time of heating may be anything from 2 to 60 minutes depending upon thickness.

37.4. When water glue are used the wood absorbs so much water that the finished plywood must be dried carefully. When synthetic resins are used as adhesive the finished plywood must be exposed to an atmosphere of controlled humidity until the proper amount of moisture has been absorbed.

37.5. According to I.S. 303-1975 the plywood for general purpose shall be of the grades namely BWR and CWR, depending up to the adhesives used for bonding the veneers, and it will be further classified into six types namely AA,AB, AC,BB, BC and CC based on the quality of the two faces each face being of three kinds namely A, B & C after pressing, the finished plywood should be reconditioned to a moisture content not less than 8 percent and not more than 16 %.

37.6. Thickness of plywood Boards

TABLE

Board	Thickness	Board	Thickness	Board	Thickness	Board	Thickness
3 ply.	3 mm.	5 ply	5 mm.	7 ply	9 mm.	9 ply	16 mm.
	4 mm.		6 mm.		13 mm.		19 mm.
	5 mm.		7 mm.		16 mm.	11 ply.	19 mm.
	6 mm.		8 mm.	9 ply.	13 mm.		25 mm.

M-38. Glass.

38.1. All glass shall be of the best quality, free from specks, bubbles, smoke veins, air holes blister, and other defects. The kind of glass to be used shall be as mentioned in the item or specification or in the special provision or as shown in detailed drawings. Thickness of glass panes shall be uniform. The specifications for different kinds of glass shall be as under.

38.2. Sheet Glass

38.2.1. In absence of any specified thickness or weight in the item or detailed specifications of the item of work, sheet glass shall be weighing 7.5 Kg/Sq. m. for panes up to 600 mm. x 600mm.

38.2.2. For panes larger than 600 mm. x 600 mm. and up to 800 mm. x 800 mm. the glass weighing not less than 8.75 Kg/Sq. m. shall be used for bigger panes up to 900 mm. x 900 mm. glass weighing not less than 8.75 Kg./Sq. m. shall be used. For bigger panes up to 900 mm. x 900 mm. glass weighing not less than 11.25 Kg. / Sq. m. shall be used

38.2.3. Sheet glass shall be patent flattened glass of best quality and for glazing and framing purposes shall conform to I.S. 1762-1960. Sheet glass of the specified colors shall be used. If so shown, on detailed drawings or so specified. For important buildings and for panes with any dimension over 900 mm. plate glass of specified thickness shall be used.

38.3. Plate Glass :

38.3.1. When plate glass is specified it shall be “polished patent plate glass” of best quality. It shall have both the surface ground flat and parallel and polished to obtain clear undisturbed vision and reflection. The plate glass shall be of the thickness mentioned in the item or as shown in the detailed drawing or as specified. In absence of any specified thickness, the thickness of plate glass to be supplied shall be 6 mm. and a tolerance of 0.20 mm shall be admissible.

38.4. Obscured Glass :

38.4.1. This type of glass transmits light so that vision is partially or almost completely obscured. Glass shall be plain rolled, figured, ribbed or fluted or frosted glass as may be specified as required. The thickness and type of glass shall be as per details on drawings or as specified or as directed.

38.5. Wired Glass:

38.5.1. Glass shall be with wire netting embedded in a sheet of planet glass. Electrical welded 13 mm. Georgian square mesh shall be used. Thickness of glass shall not be less than 6 mm. Wired glass shall be of type and thickness as specified.

M-39. Acrylic Sheets

39.1. Acrylic sheets shall be of thickness as specified in the item and of an specified shape and size as the case may be panels may be flat or curved. It should be light in weight. It shall be colorless or colored or opaque as specified in the item. Colorless sheet shall be as transparent as the finest optical glass. Its light transmission rate shall be about 95 % Transparency shall not be affected for the sheets of larger thickness. It shall be extremely resistant to sunlight weather and low temperatures.

It shall not show any significant yellowing or change in physical properties or loss of light transmission over a longer period of use. The sheet shall be impact resistant also sheets should be of such quality that they can be cut bent jointed as desired. Solution for the joints shall be used as per the requirement of manufacturer.

M-40. Particle board

40.1. The particle boards used for face panels shall of best quality free from any defects. The particle boards shall be made with phenomaldehyde adhesive. The particle boards shall conform I.S. 3087-1965 "Specification for wood particle board for general purpose". The size and the thickness shall be as indicated.

M-41. Expanded polystyrene or framed sty roper slabs.

41.1. The expanded polystyrene ceiling boards and tiles shall be of approved make and shall be of sizes, thickness, finish and color as indicated. It shall be of high density and suitable for use as insulating material. The insulating material shall be like slab of thermo Cole etc.

M-42. Resign bonded fiber glass

42.1. Resign bonded fiber glass tiles or rolls shall be of approved make and shall be of sizes thickness, and finish as indicated.

42.2. For test of Mineral wool thermal insulation Blanket I.S. 3144-1965 shall be **followed.** **42.3.** Insulation wool blanket shall be with the following coverings on one or both sides as indicated. :

- (1) Bituminised hessain Kraft paper suitable for use in position where moisture has to be excluded.
- (2) Hessian cloth or Kraft paper, for keeping out dust.
- (3) G. I. wire netting, suitable for sources to be plastered over.

M-43. Fixture and fastenings

43.1. General :

43.1.1. The fixtures and fastenings, that is butt hinges tee and strap **hinges steel door bolts, tower bolts, door latch, bath room latch, handles, door** stopper, casement window fasteners, casement stays and ventilators catch shall be made of the metal as specified in the item or its specification.

CUMMUNITY HALL

43.1.2. They shall be of iron, brass, aluminum chromium plated iron, chromium plated brass copper oxidized iron, copper oxidized brass or anodized aluminum as specified.

43.1.3. The fixtures shall be heavy medium or light type. The fixtures and fastenings shall be smooth finished and shall be such as will ensure ease of operations.

43.1.4. The samples of fixtures and fastenings shall be got approved as regards, quality and shape before providing them in position.

43.1.5. Brass and anodized aluminum fixtures and fastenings shall be bright finished. **43.2. Holdfasts**
:

43.2.1. Holdfasts shall be mad from mild steel flat 30 cm. length and one of the holdfasts shall be bent at right angle and two nos. of 6 mm. diameter holes, shall be made in it for fixing it to the frame with screws. At the other end, the holdfast shall be 'forked and bent at right angles in opposite directions.

43.3. Butt hinges :

43.3.1. Railway standard heavy type butt hinges shall be used when so specified.

43.3.2. Tee and strap hinges shall be manufactured from M.S. Sheet.

43.4. Steel door bolts (Aldrops):

43.4.1. The aldrops as specified in the item shall be used and shall be got approved.

43.5. Tower bolts (Barrel Type):

43.5.1. Tower bolts as specified in the item shall be used and shall be got approved.

43.6. Door Latch :

43.6.1. The size of door latch shall be taken as the length of latch.

43.7. Bathroom Latch :

43.7.1. Bathroom latch shall be similar to tower bolt.

43.8. Handle : The size of the handles shall be determined by the inside grip length of the handles. Handles shall have a base plate of length 50 mm. more than the size of the handle.

43.9. Door Catch :

43.9.1. Door catch shall be fixed at a height of about 900 mm. from the floor level such that one part of the catch is fitted on the inside of the shutter and the other part is fixed in the wall with necessary wooden plug arrangements for appropriate fixity. The catch shall be fixed 20 mm. inside the face of the door for easy operation of catch.

43.10. Door Stoppers :

43.10.1. Door stoppers shall be either floor door stopper type or door catch type. Floor stopper shall be of overall size as specified and shall have a rubber cushion.

43.11. Wooden Door Stop with hinges :

43.11.1. Wooden door stop of size 100 mm. x 60 mm. x 40 mm. shall be fixed on the door frame with a hinges of 75 mm. size and at a height of 900 mm. from the floor level. The wooden door stop shall be provided with 3 coats of approved oil paint.

43.12. Casement Window Fastener :

43.12.1. Casement window fastener for single leaf window shutter shall be left or right handled as directed.

43.13. Casement stays (Straight Ped Stay):

43.13.1. The stays shall be made from a channel section having three holes at appropriate position so that the window can be opened either fully or partially as directed. Size of the stay shall be 250 mm. to 300 mm. as directed.

43.14. Ventilator Catch :

43.14.1. The pattern and shape of the catch shall be as approved.

43.15. Pivot :

43.15.1. The base and socket plate shall be made from minimum 3 mm. thick plate and projected pivot shall not be less than 12 mm. diameter and 12 mm. length and shall be firmly riveted to the base plate in case of iron pivot and in single piece plate in the case of brass pivot.

M-44. Paints :**44.1. (A) Oil paints :**

44.1.1. Oil paints shall be of the specified color and as approved. The ready mixed paints shall only be used. However, if ready mixed paint of specified shade or tint is not available white ready mixed paint with approved Steiner will be allowed. In such a case, the contractor shall ensure that the shade of the paint so allowed shall be uniform.

44.1.2. All the paints shall meet with the following general requirements :

- (i) Paints shall not show excessive setting in a freshly opened full can and shall easily be redispersed with a paddle to a smooth homogeneous state. The paint shall show no curdling, livering, caking or color separation and shall be free from lumps and skins.
- (ii) The paint shall not skin within 48 hours in a three quarters filled closed container.
- (iv) The paint shall dry to a smooth uniform finish free from roughness, grit unevenness and other imperfections.

44.1.3. Ready mixed paint shall be used exactly as received from the manufacturers and generally according to their instructions and without any admixtures whatsoever.

44.2. (B) Enamel paints :

44.2.1. The enamel paint shall satisfy in general requirements in specification of oil paints. Enamel paint shall conform to I.S. 2933-1975.

M-45. French Polish

45.1. The French polish of required tint and shade shall mentioned be prepared with the below ingredients and other necessary materials.

- (i) Denatured spirit of approved quality (ii) Chandras (iii) Pigment.

45.2. The French polish so prepared shall conform to I.S. :348-1968.

M-46. Marble chips for marble mosaic terrazzo

46.1. The marble chips shall be of approved quality and shades. It shall be hard, sound, dense and homogeneous in texture with crystalline and coarse grains. It shall be uniform in color and free from stains cracks, decay and weathering.

46.2. The size of various colors of marble chips ranging from the smallest up to 20 mm shall be used where the thickness of top wearing layer is 6 mm. size. The marble chips of approved quality and colors only as per grading as decided by the Engineer-in-charge shall be used for marble mosaic tiles or works.

46.3. The marble chips shall be machine crushed. They shall be free from foreign matter, dust etc. Except as above, the chips shall conform to I.S. 2114-1962.

M-47. Flooring Tiles.

47.1.(A) Plain Cement tiles :

47.1.1. The plain cement tiles shall be of general purpose type. These are the tiles in the manufacture of which no pigments are used. Cement used in the manufacture of tiles shall be as per Indian Standards.

47.1.2. The tiles shall be manufactured from a mixture of cement and natural aggregates by pressure process. During manufacture the tiles shall be subjected to pressure of not less than 140 Kg. /Sq. Cm.

The proportion of cement to aggregate in the backing of the tiles shall be not less than 1 :3 by weight. The wearing face, through the tiles are of plain cement, shall be provided with stone chips of 1 to 2 mm. size. The proportions of cement to aggregate in the wearing layer of the tiles shall be three parts of cement to one parts of chips by weight. The minimum thickness of wearing layer shall be 3 mm. The color and texture of wearing layer shall be uniform throughout its face and thickness. On removal from mold, the tiles and shall be kept in moist condition continuously at least for seven days and subsequently, if necessary, for such long period as would ensure their conformity to requirements of I.S. 1237-1980 regarding strength resistance to wear and water absorption.

47.1.3. The wearing face of the tiles shall be plane, free from projections, depressions and cracks and shall be reasonably parallel to the back face of the tile. All angles shall be right angle and all edges shall be sharp and true.

47.1.4. The size of tiles generally be square shapes 24.85 Cm. x 24.85 Cm. or 25 Cm. x 25 Cm. The thickness of tiles shall be 20 mm.

47.1.5. Tolerance of length and breadth shall be ± 1 mm. tolerance of thickness shall be ± 5 mm.

47.1.6. the tiles shall satisfy the tests as regards transverse strength resistance to wear and water absorption as per I.S. 1237-1980.

47.2.(B) Plain Colored Tiles :

47.2.1. The tiles shall have the same specification as for plain cement tiles as per (A) above expect that they shall have a plain wearing surface wherein pigments are used. They shall conform the I.S. 1237-1980.

47.2.2. The pigments used for coloring cement shall not exceed 10 % by weight of cement uses in the mix. The pigments, synthetic or otherwise, used for coloring tiles shall have permanent color and shall not contain materials detrimental to concrete.

47.2.3. The color of the tiles shall be specified in the item or as directed.

47.3.(C) Marble mosaic tiles :

47.3.1. These tiles have same specification as per plain cement tiles except the requirements as stated below.

CUMMUNITY HALL

47.3.2. The marble mosaic tiles shall conform to I.S. 1237-1980. The wearing face of the tiles mechanically ground and filled. The wearing face of tiles shall be free from projections depressions and cracks and shall be reasonably parallel to the back face of the tiles. All angles shall be right angles and all edges shall be sharp and true.

47.3.3. Chips used in the tiles be from smallest up to 20 mm. size. The minimum thickness of wearing layer of tiles shall be 6 mm. For pattern of chips to be had on the wearing face, a few samples with or without their full size photographs as directed shall be approved by the Engineer In Charge for approval.

47.3.4. Any particular samples if found suitable shall be approved by the Engineer in charge or he may ask for a few more samples to be presented. The samples shall have to be made by the contractor till a suitable sample is finally approved for use in the work. The contractor shall ensure that the tiles supplied for the work shall be in conformity with the approved sample only, in terms of its dimensions, thickness of backing layer and wearing surface, materials, ingredients, color, shade, chips, distribution etc. required.

47.3.5. The tiles shall be prepared form cement conforming to Indian Standards or colored Portland cement generally depending upon the color of tiles to be used or as directed.

47.4.(D) Chequered Tiles :

47.4.1. Chequered tiles shall be plain cement tiles or marble mosaic tiles. The former shall have the same specification as per (A) above and the latter as per marble mosaic tiles as per (C) except as mentioned below.

47.4.2. The tiles shall be of nominal size 250 mm. x 250 mm. or as specified. The center to center distance of chequer shall not be less than 25 mm. and not more than 50 mm. The overall thickness of the tile shall be 22 mm.

47.4.3. The grooves in the chequers shall be uniform and straight. The depth of the grooves shall not be less than 3 mm. The chequered tiles shall be plain colored or mosaic as specified. The thickness of the upper layer measured from the top of the chequers shall not be less than 6 mm. The tiles shall be given the first grinding with machine before delivery to site.

47.4.4. Tiles shall conform or relevant I.S. 1237-1980.

47.5.(E) Chequered Tiles For Stair Cases :

47.5.1. The requirements of these tiles shall be the same as chequered tiles as per (D) above except following respects :

CUMMUNITY HALL

(1) The length of a tile including nosing shall be 300 mm. (2) The minimum thickness shall be 28 mm. (3) The nosing shall have also the same wearing layer as at the top. (4) The nosing edge shall be rounded. (5) The front portion of the tile for a minimum length of 75 mm. from and including the nosing shall have grooves running parallel to nosing and at centers not exceeding 25 mm. Beyond that the tiles shall have normal chequer pattern.

M-48. Rough Kotah Stone

48.1. The kotah stones shall be hard even sound and regular in shape and generally uniform in color. The color of the stone shall generally be green. Brown colored shall not be allowed for use. They shall be without any soft veins, cracks or flaws.

48.2. The size of the stones to be used for flooring shall be of size 600 mm. x 600 mm. and/or size 600 mm. x 40 mm. as directed. However smaller sizes will be allowed to be used to the extent of maintaining required pattern. Thickness shall be as specified.

48.3. Tolerance of minus 30 mm. on accounts of chisel dressing of edges shall be permitted for length as well as breadth. Tolerance in thickness shall be ± 3 mm.

48.4. The edge of stones shall be truly chiseled and table rubbed with coarse sand before paving. All angles and edges of the stones shall be true, square and free from chipping and surface shall be true and plain.

48.5. When machine cut edges are specified, the exposed and the edges at joints shall be machine cut. The thickness of the exposed machine cut edges shall be uniform.

M-49. Polished Kotah Stones

49.1. Polished Kotah stone shall have the same specification as per rough kotah stone except as mentioned below.

49.2. The stones shall have machine polished surface. When brought on site, the stones shall be single polished or double polished depending upon its use. The stones for paving shall generally be single polished. The stones to be used for dado, skirting, sink, veneering, sills, steps etc. where machine polishing after the stones are fixed in situ is not possible shall be double polished.

M-50. Dholpur Stone Slab

50.1. Dholpur stone slab shall be of best quality as approved by the Engineer in charge. The stone slab shall be without any veins, cracks and flaws. The stone slab shall be even sound and durable regular in shapes and of uniform color.

50.2. The size of the stone shall be as specified in the item or detailed drawing or as approved by the Engineer-in-charge. The thickness of the stone shall be as specified in the item of work with the permissible tolerance of ± 2 mm. The provision in respect of polishing as for polished kotah stone shall apply to polished Dholpur stone also. All angles and edges of the face of the stone slab shall be fine chiseled or polished as specified in the Item of work and all the four edges shall be machine cut. All angles and edges of the stone slab shall be true and plane.

50.3. The sample of stone shall be got approved by the Engineer in Charge for a particular work. It shall be ensured that the stones to be used in a particular work shall not differ much in shade or tint from the approved sample.

M-51 Marble Slab

51.1. Marble slab shall be white or of other and of best quality as approved by the Engineer in charge.

51.2. Slabs shall be hard, close, uniform and homogeneous in texture. They shall have even crystalline grain and free from defects and cracks. The surface shall be machine polished to an even and perfect plane surface and edges machine cut true and square. The rear face shall be rough to provide key for the mortar.

51.3. Marble slabs with natural veins, if selected shall have to be laid as per the pattern given by the Engineer in charge. Size of the slab shall be minimum. 460 mm. x 450 mm. and preferably 600 mm. x 600 mm. However smaller sizes will be allowed to be used to the extent of maintaining required pattern.

51.4. The slab shall not be thinner than the specified thickness at its thinnest part A few specimen of finished slab to be used shall be deposited by the Contractor in the officer for reference.

51.5. Except as above the marble slab shall conform to I.S. 1130-1969.

M-52 Granite Stone slab

52.1. Granite shall be of approved color and quality. The stone shall be hard, even sound and regular in shape and generally uniform in color. It shall be without any soft veins, cracks of flaws.

52.2. The thickness of the stone shall be specified in items.

52.3. All exposed faces shall be double polished to tender truly smooth and even reflecting surface. The exposed edges and corners shall be rounded off as directed. The exposed edges shall be machine cut and shall have uniform thickness.

M-53. P.V.C. Flooring

53.1. P.V.C. sheets for P.V.C. floor covering shall be of homogeneous flexible type conforming to I.S. 3462-1966. The PVC covering shall neither develop any toxic effect while put to use not shall give off any disagreeable odor.

53.2. Thickness of flexible type covering tiles shall be as specified in the description of the item. _____

53.3. The flexible type shall be backed with Hessian or other woven fabric. The following tolerances shall be applicable on the nominal dimensions of the rolls or tiles.

- | | | | |
|-----|-----------------------------------|-----|-----------------------------------|
| (a) | Thickness ± 0.15 mm. | | |
| (b) | Length or Width | | |
| (1) | 300 mm. Sqr. Tiles ± 0.20 mm. | (3) | 900 mm. Sqr. Tiles ± 0.60 mm. |
| (2) | 600 mm. Sqr. tiles ± 0.40 mm. | (4) | Sheets and roll ± 0.10 mm. |

53.4. Adhesive :

53.4.1. The adhesive for PVC flooring shall be of the type and make recommended by the manufactures of PVC sheets/tiles.

M-54. Facing Tiles

54.1. The facing tiles (burnt clay facing bricks) shall be free from cracks and nodules of free lime. They shall be thoroughly burnt and shall have plane rectangular faces with parallel sides and sharp straight right angle faces. The texture of the finished surface that will be exposed when in place shall conform to an approved sample consisting not less than for stretcher bricks each representing the texture desired. The facing tiles shall have a pleasing appearance, sufficient resistance to penetration by rain and greater durability than common bricks. The tiles shall conform to I.S. 2691-1972.

54.2. The standard size of facing brick tiles shall be 19 x 9 x 4 cms. The facing brick tiles shall be provided with frog which shall conform to I.S. 11077-1976.

54.3. The permissible tolerance in dimensions specified above shall be as follows.

Size	Tolerance for	
	1 st. class Brick	2 nd. class Brick
Length	± 6 mm.	± 10 mm.
Width	± 3 mm.	± 7 mm.
Height	± 1.5 mm.	± 3 mm.
The tolerance for distortion or war page of face or individual brick from a plane surface and from straight line respectively shall be as follows :		
Facing dimensions	Permissible tolerance.	
Max. below 19 cms.	Max 2.5 mm.	
-Do- above 19 mm.	Max 3.0 mm.	

54.5. The average compressive strength obtained as a sample of five tiles when wetted in accordance with the procedure laid as per I.S. 1077-1976 shall be not less than 175 Kg./Sq. Cm.

54.6. The average water absorption for five bricks tiles shall not exceed 12 percent of average weight of brick before testing. The absorption for each individual bricks shall not exceed 25%

54.7. The brick tiles when tested in accordance with I.S. 1077-1976 the rate of efflorescence shall not be more than "Slightly effloresced".

M-55. White glazed tiles

55.1. The tiles shall be of best quality as approved by the engineer in charge. They shall be flat and true to shape. They shall be free from cracks, crazing sports, chipped edges and corners. The glazing shall be of uniform shade.

55.2. The tiles shall be nominal size of 150 mm. x 150 mm. unless otherwise specified. The maximum variation the stated sizes. Other than the thickness of tile shall be ± 1.5 mm. The thickness of tile shall be 6 mm. Except as above the tiles shall conform to I.S. 1977-1970.

M-56 Galvanized iron pipes and fittings

56.1. Galvanized iron pipes shall be of the medium type and or required diameter and shall comply with I.S. 1239-1979. The specified diameter of the pipes shall refer to the inside diameter of the bore. Clamps, screw and all galvanized iron fittings shall be of the standard 'R' or equivalent make.

M-57. Bib cock and stop cock

57.1. A bib cock is a draw off tap with a horizontal inlet and free outlet. A stop cock is a valve with a suitable means of connection for insertion in a pipe line for controlling or stopping the flow.

57.2. They shall be of screw down type and or brass chromium plated and of diameter as specified in the description of the item. They shall conform to I.S. 781-1977 and they shall be of best Indian make. They shall be polished bright.

57.3. The minimum finished weight of bib cock and stop cock shall be as given below :

Diameter	Bib cock	Stop cock	Diameter	Bib cock	Stop cock
15 mm.	0.25 Kg.	0.25 Kg.	6 mm.	0.40 Kg.	0.40 Kg.
20 mm.	0.30 Kg.	0.35 Kg.	6 mm.	0.75 Kg.	0.75Kg.

M-58. Gun metal wheel valve

58.1. The gun metal wheel valve shall be of approved quality. These shall be of gun metal fitted with wheel and shall be of gate valve opening full way and of the size as specified. These shall conform to I.S. 778-1971.

M-59. White glazed porcelain wash basin

59.1. Wash basin shall be of white porcelain first quality best Indian make and it shall conform to I.S. 2556(Part-IV)-1972 and I.S. 771-1979. The size of the wash basin shall be as specified in the item. Wash basin shall be of one piece construction with continued over flow arrangements. All internal angles shall be designed so as to facilitate cleaning. Wash basin shall have single tap hole or two holes as specified. Each basin shall have a circular waste hole which is either riveted or beveled internally with 65 mm. diameter at to and 10 mm. depth to suit the waste fitting. The necessary stud slot to receive the bracket on the under side of the basin shall be provided. Basin shall have an internal soap holder recess which shall fully drain into the bowl.

59.2. White glazed pedestal of the quality and color a that to the basin shall be provided where specified in the item. It shall be completely recessed at the back for reception of supply and wash pipe. It shall be capable of supporting the basin rigidly and adequately and shall be so designed as to make the height from floor to floor top of the rim of basin 750 mm. to 800 mm. as directed.

M-60. European type water closet/with low flushing.

60.1. The European type water closet shall be white glazed porcelain first quality and shall be of wash down type conforming to I.S. 2556-1973 and I.S. 771-1979.

60.2. 'S' trap shall be provided as required with water seal not than 50 mm. The solid plastic seat and cover shall be of best Indian make conforming to I.S. 2548-1980. They shall be made of molded synthetic materials which shall be tough and hard with high resistance to solvents and shall be free from blisters and surface defects and shall have chromium plated brass hinges and rubber buffer of suitable size.

M-61. Orissa type water closet

61.1. The Specification of Orrissa type white glazed water closet of first quality shall conform to I.S. 2256(Part-III)-1981 and relevant specification of Indian type water closet except that pan will be with the integral squattig pan of size 580 mm. x 440 mm. with raised foot rest.

M-62. Indian type water closet

62.1. The Indian type white glazed water closet of first quality shall be of size as specified I the item and conforming to I.S. 771-1979 and I.S. 2556-(Part-II)1981. Each pan shall have integral flushing. It shall have an inlet at black an or front for connecting flush pipes as directed. The inside of the bottom of the pan shall have sufficient slope from the front towards the outlet and surface shall be uniform and smooth. Pan shall be provided with 100 mm. diameter 'p' or 's' trap with approximately 50 mm. Water seal and 50 mm. diameter vent horn.

M-63. Glazed Earthen Ware Sink

63.1. The glazed earthen ware sink shall be of specified size, color and quality. They sink shall conform to I.S. 771(part-II)1979. The brackets for sinks shall conform to I.S. 775- 1970.

63.2. The pipes shall conform to I.S. 1239-(part-I)1973 and I.S. 404-1962 for steel and lead pipes respectively 32 mm. brass waste coupling of standard pattern with brass chain and rubble plug shall be provided with sink.

M-64. Glazed earthen ware Lipped type flat back urinal/corner type urinal

64.1. The lipped type urinal shall be flat back or corner type as specified in the item and shall conform to I.S. 771-1979. It shall be of best Indian make and size as specified and approved by the Engineer in charge. The flat back of corner type urinal must of 1st quality free from any defects, cracks etc.

M-65. Low level Enemal flushing tank

65.1. The low level enemal flushing tank shall be of 15 litres capacity. It shall conform I.S. 774-1971. The flushing cistern shall be of best quality and free from any defects. The flushing tank shall have outlet 32 mm. diameter. The outlet shall be connected with W.C. pan by lead pipe or P.V.C. as specified. The flushing tank shall be provided with inlet and outlet for fixing G.I. inlet pipes and over flow pipes. The flushing cistern shall be provided with chromium plated handle for flushing. The flushing tank shall be provided with bracket of cast iron so that it can be fixed on wall at specified height. The brackets shall conform to I.S. 775-1970.

M-66. Cast iron flushing cistern.

66.1. The cast iron flushing cistern shall be of 15 liters capacity. It shall conform to I.S. 774-1971. The flushing cistern shall be of best quality and free from any defects. The flushing cistern shall have outlet of 32 mm. dia. The lead pipe shall conform to I.S. 404(part-I)-1962. For fixing G.I. inlet pipes and overflow pipe 20 mm. dia. inlet and outlet shall be provided. The flushing cistern shall be provided with galvanized iron chain and pull of sufficient length and shall be got approved from the Engineer in charge. The cast iron flushing cistern shall be painted with one coat of anti corrosive paint and two coats of paints. The flushing cistern shall be fixed on two C.I. brackets. The C.I. brackets shall conform to I.S. 775-1970.

M-67. Flush cock.

67.1. Half turn flush cock (Heavy weight) shall be of gun metal chromium plated of dia. as specified in the description of the item. The flush cock shall conform to relevant Indian Standard.

M-68. Cast iron pipes and fittings.

68.1. All soil, water, vent and antisiphonage pipes and fitting shall conform to I.S. 1729- 1964. The pipes shall have spigot and socket ends with head on spigot end. The pipes and fitting shall be true to shape smooth, cylindrical, their inner and outer surfaces being as nearly as practicable concentric. They shall be sound and nicely cast and shall be free from cracks, laps, pinholes or the imperfection and shall be neatly dressed and carefully fettled.

68.2. The end of pipes and fittings shall be reasonable sq. to their axis.

68.3. The size of cast iron pipes shall be of the diameter as specified in the description and shall be in length of 1.5 M., 1.8 m. including socket ends of the pipe unless shorter lengths are either specified or required at junctions etc.

The pipes and fittings shall be supplied without ears unless specified or directed otherwise.

68.4. Tolerances :

68.4.1. The Standard weight and thickness of pipes shall be as shown in the following table. A tolerance up to -10% may however be allowed against these standard weights.

Sr. No.	Nominal dia of bore	Thickness	Overall	Weight of pipe	Excluding ears
			1.5 m. long	1.8 m. long.	2 m. long.
1.	75 mm.	5.0 mm.	12.38 Kg.	16.52 Kg.	18.37 Kg.
2.	100 mm.	5.0 mm.	18.44 Kg.	21.67 Kg.	24.15 Kg.

68.4.2. A tolerance up to 15 % in thickness and 20 mm. length will be allowed. For fittings tolerance in lengths shall be plus 25 mm. and minus 10 mm.

68.4.3. The thickness of fittings and their socket and spigot dimensions shall conform to the thickness and dimensions specified for the corresponding sizes of straight pipes. The tolerance in weights and thickness shall be the same as straight pipes.

M-69. Nani Trap

69.1. Nani trap shall be of cast iron and shall be free from porosity or other defects which affect serviceability. The thickness of the base metal shall not be less than 6.5 mm. The surface shall be smooth and free from craze, chips and other flaws or any other kind of defects which affect serviceability. The size of nani trap shall be specified and shall be of self cleaning design.

69.2. The nani trap shall be of quality approved by the Engineer in charge and shall generally conform to the relevant Indian Standards.

69.3. The Nahni trap provide shall be with deep seal, min. 50 mm. except at places where trap with deep seal can not be accommodated. The cover shall be cast iron perforated cover shall be provided on the trap of appropriate size.

M-70. Gully Trap

70.1. Gully trap shall conform to I.S. 651-1980. It shall be one free from defects such as fire cracks or hair cracks. The glaze of the traps shall be free from crazing. They shall give a sharp clear note when struck with light hammer. There shall be no broken blisters.

70.2. The size of the gully trap shall be as specified in the item

70.3. Each gully trap shall have one C.I. grating of square size corresponding to the dimensions, of inlet of gully trap. It will also have a water tight C.I. cover with frame inside dimensions 300 mm. x 300 mm. the cover with frame inside dimensions 300 mm. x 300 mm. the cover and weighing not less than 4.53 Kg. and the frame not less than 2.72 Kg. The grating cover and frame shall be of sound and good casting and shall have truly square machined seating faces.

M-71. Glazed Stone Ware pipe and Fittings

71.1. The pipes and fittings shall be of best quality as approved by the Engineer in charge. The pipe shall be of best quality manufactured from stone-ware of fire clay, salt glazed thoroughly burnt through the whole thickness, of a close even texture, free from air blows, fire blisters, cracks and other imperfections, which affect the serviceability. The inner and outer surfaces shall be smooth and perfectly glazed. The pipe shall be capable to withstand pressures or 1.5 M. lead without showing sign of leakage. The thickness of the wall shall not be less than 1/12th of the internal dia. The depth of socket shall not be less than 38 mm. The socket shall be sufficiently large to allow a join of 6 mm. around the pipe.

71.2. The pipes shall generally conform to relevant I.S. 651-1980.

M-72. Wall Peg Rail

72.1. The aluminum wall peg rail shall have three aluminum pegs approved quality and size. It shall be fixed on teakwood plank of size 450 mm. x 75 mm. x 20 mm. The teakwood shall be French polished or oil painted as specified.

M-73. G.I. Water Spot

73.1. The G.I. pipes of 40 mm. dia. shall be of medium quality and specials shall be of 'R' brand or a equivalent brand of best approved quality.

73.2. The pipe shall have length as required for the thickness of wall in which it is **fixed, and at outside end tee and bend cut at half the length shall be provided** and at other end coupling shall be provided to have better fixing. The water spout shall be provided as per detailed drawing or as directed.

M-74 Asbestos Cement pipe(A.C. pipe)

74.1. The asbestos cement pipe of diameter as specified in the description of the item shall conform to I.S. 1626-1980. Special like bends, shoes, cowls etc. shall conform to relevant Indian Standards. The interior of pipe shall have its smooth finish, regular, surface and regular internal dia. The tolerance in all dimensions shall be as I.S. 1626-(part-I)1980.

M-75. Cyrdon Ball valve

75.1. Ball valve of screwed type including polythene float and necessary level etc. shall be of the size as mentioned in the description of item and shall conform to I.S. 1703-1977.

M-76. Bitumen Felt For Water proofing And Damp Proofing

76.1. Bitumen felt shall be on the fibre bases and shall be of type 2 self finished felt grade 2 and shall conform to I.S. 1322-1970.

M-77. Selected Earth.

77.1. The selected earth shall be that obtained from excavated material or shall have to be brought from outside as indicated in the items. If item does not indicate anything the selected earth shall have to be brought from outside.

77.2. The selected earth shall be good yellow soil and shall be got approved from the Engineer in Charge. In no case black cotton soil or similar expansive and shrinkable soil shall be used. It shall be clean and free from all rubbish and perishable materials, stones or brick bats. The clods shall be broken to a size of 50 mm. or less. Contractor shall make his own arrangement at his own cost for land for borrowing selected earth. The stacking of material shall be done as directed by the Engineer in charge in such a way not to interfere with any constructional activities and in proper stacks.

77.3. When excavated material is to be used, only selected stuff got approved from the Engineer in charge shall be used. It shall be stacked separately and shall comply with all the requirements of selected earth mentioned above.

M-78 Barbed Wire

78.1. The barbed wire shall be of galvanized steel and it shall generally conform to I.S. 278-1978. The barbed wire shall be of type I whose nominal diameter for line wire shall be 2.5 mm. and point wire 2.24 mm. The nominal distance between two barbs shall be 75 mm. unless otherwise specified in the item. The barbed wire shall be formed by twisting together two line wires. One containing the barbs. The size of the line and point wires and barb spacing shall be as specified above. The permissible deviation from the nominal diameter of the line wire and point wire shall not exceed ± 0.08 mm.

78.2. The barbs shall carry four points and shall be formed by twisting two point wires, each two turns, lightly round one line wire, making altogether four complete turns. The barbs shall have a length of not less than 13 mm. and not more than 18 mm. The point shall be sharp and cut at an angle not greater than 35 degree of the axis of the wire forming the barbs.

78.3. The line and point wires shall be circular in section, free from scale and other defects and shall be uniformly galvanized. The line wire shall be in continuous length and shall not contain any welds other than those in the rod before it is drawn. The distance between two successive splices shall not be less than meters.

78.4. The lengths per 100 Kg. of barbed wire I.S. type-I shall be as under.

Nominal 1000 meter Minimum 934 Meter Max. 1066 M.

SPECIFICATIONS

Item No.1 Excavation for foundation upto 1.5 m depth including sorting out and stacking of useful materials and disposing off the excavated stuff upto all lead.(C) Hard Murrum

1.0. Hard murrum

The hard murrum shall be clean of good binding quality and of approved quality obtained from approved quarries of disintegrated rocks which contain silicon materials and natural mixture of clay of clarions origin. The size of hard murrum shall not be more than 20 mm. **2.0. Workmanship** shall be followed except that the excavation work shall be carried in hard murrum.

1.0. General

1.1. Any soil which generally yields to the application of pick axes and shovels, phawaras rakes or any such ordinary excavating implement or organic soil, gravel silt, sand turf, clay peat etc. fall under this category.

2.0. Clearing the site

2.1. The site on which the structure is to be built shall be cleared and all obstructions loose stone materials and rubbish of all kind, bush wood and trees shall be removal as directed. The materials so obtained shall be property of the Government and shall be conveyed and stacked as directed within 50 m. lead. The roots of the trees coming in the sides shall be cut and coated with a hot asphalt.

2.2. The rate of side clearance is deemed to be included in the rate of earth work for which no extra will be paid.

3.0. Setting out

After clearing the site the centers lines will be given by the Engineer in charge. The contractor shall assume full responsibility for alignment, elevation and dimension of each and all parts of the work. Contractor shall supply labours materials etc. required for setting out the reference marks and bench marks and shall maintain them as long as required and directed.

4.0. Excavation

The excavation in foundation shall be carried out in true line and level and shall have the width and depth as shown I the drawings or as directed. The contractor shall do the necessary shoring and shuttering or providing necessary slopes to a safe angle, at his own cost. The payment for precautionary measures shall be paid separately if not specified. The

CUMMUNITY HALL

bottom of the excavated area shall be leveled both longitudinally and transferely as directed by removing and watering as required no earth filling will be allowed for bringing it to level. If by mistake or any excavation is made deeper or wider than that shown on the plan or directed. The extra depth or width shall be made up with concrete of same proportion as specified for the foundation concrete at the cost of the contractor. The excavation up to 1.5 m. depth shall be measured under this item.

5.0. Disposal of the excavated stuff

5.1. The excavated stuff of the selected type shall be used in filling the trenches and plinth or leveling the ground in layers including ramming and watering etc.

5.2. The balance of the excavated quantity shall be removed by the contractor from the site of work to a place as directed with lead up to 50 M. and all lift.

6.0. Mode of measurements & Payments

6.1. The measurement of excavation in trenches for foundation shall be made according to the section of trench shown on the drawing or as per sections given by the Engineer in charge. No payment shall be made for surplus excavation made in excess of above requirements or due to stopping and sloping back as found necessary on account of conditions of soil and requirements safety.

6.2. The rate shall be for a unit of one cubic meter.

Item No.2 Providing and laying cement concrete 1:4:8 (1 cement, 4sand, 8 Crushed stone aggregates 40 mm.Nominal size)and curing complete, excluding cost of formwork in(a) Foundation and Plinth.

1.0. Materials

1.1. Water shall conform to M-1, cement shall conform to M-3, sand shall conform to M- 6, Stones aggregate 40 mm. nominal size shall conform to M-12.

2.0. Workmanship

2.1. General

2.1.1. Before stating concrete the bed of foundation trenches shall be cleared of all loose materials, leveled watered and rammed as directed.

2.2. Proportion of Mix :

2.2.1. The proportion of cement, sand and coarse aggregate shall be one part of cement 4 parts of sand and 8 parts of stone aggregates and shall be measured **by volume**.

2.2.2 The proportion of cement concrete shall be mixed in the preparation of 1 :4 :8 by volume.

2.3. Mixing :

CUMMUNITY HALL

2.3.1. The concrete shall be mixed in a mechanical mixer at the site of work. Hand mixing may however be allowed for smaller quantity of work if approved by the Engineer in charge. When hand mixing is permitted by the Engineer in charge in case of break down of machineries and in the interest of the work, it shall be carried out on a water tight platform and care shall be taken to ensure that mixing is continued until the mass is uniform in color and consistency. However in such case 10 % more cement than otherwise period 1 ½ to 2 minutes. The quantity of water shall be just sufficient to produce a dense concrete of required workability for the purpose.

2.4. Transporting & Placing the Concrete :

2.4.1. The concrete shall be handed from the place of mixing to the final position in not more than 15 min. by the method as directed and shall be placed in to its final position, compacted and finished within 30 min. of mixing with water i.e. before the setting commences.

2.4.2. The concrete shall be laid in layers of 15 cms. To 20 cms.

2.5.1. The concrete shall be rammed with heavy iron rammers and rapidly to get the required compaction and to allow all the interstices to be filled with mortar

2.6. Curing :

2.6.1. After the final set, the concrete shall be kept continuously wet if required by pounding for a period of not less than 7 days from the date of placement.

2.7. Mode of Measurement & Payment :

2.7.1. The concrete shall be measured for its length breadth and depth limiting dimensions to those specification on plan or as directed.

2.7.2. The rate shall be for a unit of one cubic metre.

Item No.3 Providing and laying ordinary cement concrete 1:1.5:3 (1 cement, 1.5 sand, 3 graded stone aggregates 20 mm. Nominal size) and finishing smooth with curing etc. complete excluding cost of form work and reinforcement for reinforced cement concrete work in in A) Foundations, footings, base of columns and mass concrete

1.0. Materials

Water shall conform to M-1, cement shall conform to M-3, sand shall conform to M-6, Grit shall conform to M-8, Graded stone aggregate 20 mm. nominal size shall conform to M-12.

2.0. General

2.1. The concrete mix is not required to be designed by preliminary testes. The proportion of the concrete mix shall be 1:2:4 (1 cement : 2 coarse sand : 4 graded stones aggregate 20 mm. nominal size) by volume concrete shall have exposed concrete surface or as specified in the item.

2.2. The designation ordinary M-100, M-150, M-200, M-250 specified as per I.S. correspond approximate to 1:3:6, 1:2:4, 1:1 ½ : 3 and 1:1:2 nominal mix of ordinary concrete by volume respectively..

CUMMUNITY HALL

2.3. The ingredients required for ordinary concrete containing one bag of cement of 50 kg. by weight (0.0342 Cu. M.) for different proportions of mix shall be as under.

Grade of concrete.	Total quantity of dry aggregate by volume per 50 kgs. Of cement to be taken as the sum of individual volume of fine and coarse aggregates, maximum	Proportion of fine aggregate to coarse aggregate	Quantity of water per 50 kgs. Of cement maximum.
1	2	3	4
M-100(1:3:6)	300 Liters	Generally 1 :2 for line aggregate	34 Liters
M-150(1:2:4)	220 Liters	To coarse aggregate by vol.	32 Liters
M-200(1 :1 ½ 3)		160 but subject to an upper limit	30 Liters
M-250(1:1:2)	100 Liters	Of 1 :1 ½ and lower limit	1:327 Liters

2.4. The water cement ratios shall not be more than specified in the above table. The cement content of mix specified in the table shall be increased if the quantity of water in mix has to be increased to overcome the difficulties of placements and compaction so that the water cement ratio specified in the table is not exceeded.

2.5. Workability of the concrete shall be controlled by maintaining a water cement ratio that is found to give a concrete mix which is just sufficient wet to be placed and compacted without difficulty with the measure available.

2.6. The max. size of coarse aggregate shall be as large as possible within the limits specified but in no case greater than one forth of the minimum thickness of the member provided that the concrete can be placed without difficulty so as to surround all reinforcement thoroughly and to fill the corners of the form.

2.7. For reinforced concrete work, coarse aggregates having a nominal size of 20 mm. are generally considered satisfactory.

2.8. For heavily reinforced concrete members as in the case of ribs of main beams, the nominal max. size of coarse aggregate should usually be restricted to 5 mm. less than the min. clear distance between the main bars, or 5 mm. less than the min. cover to the reinforcement whichever is smaller.

2.9. Where the reinforcement is widely spaced as in solid slabs, limitations of size of the aggregate may not be so important, and the nominal max. size may some times be as great as or greater than min. cover.

2.10. Admixture may be used in concrete only with approval of Engineer in charge based upon the evidence that with passage of time neither the compressive strength of concrete is reduced not are other requisite qualities of concrete and steel impaired by the use of such admixture.

3.0. Workmanship

CUMMUNITY HALL

3.1. Proportioning : Proportioning shall be done by volume, except which shall be measured in item of bags of 50 kg. weight, the volume of one such bag being taken as 0.0342 cu. Meter. Boxes of suitable size shall be used for measuring sand aggregate. The size of boxes(internal)shall be 35x25 cms. And 40cms. Deep while measuring the aggregate and sand the boxes shall be filled without shaking ramming or hammering. The proportioning of sand shall be on the basis of its dry volume and in case of damp sand, allowances for bulk age shall be made.

3.2. Mixing :

3.2.1. For all work, concrete shall be mixed in a mechanical mixer which along with other accessories shall be kept in first class working condition and so maintained throughout the construction. Measured quantity of aggregate, sand and cement required for each batch shall be poured into the drum of the mechanical mixer while it is continuously running. After half a minute of dry mixing measured quantity of water require for eache batch of concrete mix shall be added gradually and mixing continued for another one and a half minute. Mixing shall be continued till materials are uniformly distributed and uniform color of the entire mass is obtained and each individual particle of the coarse aggregate shows complete coating of mortar containing its proportionate amount of cement. In no case shall mixing be done for less than 2 minutes after all ingredients have been put into the mixer.

3.2.2. When hand mixing is permitted by the Engineer in charge for small jobs or for certain other reasons, it shall be done on the smooth water tight platform large enough to allow efficient turning over the ingredients of concrete before and after adding water flow out. Cement in required number of bags shall be spread in a layer of uniform thickness on the mixing platform. Dry coarse and fine aggregate and cement shall then be mixed thoroughly be turning over to get a mixture to uniform color. Specified quantity water shall then be added gradually through a rose can and themass turned over till a mix of required consistency is obtained. In hand mixing quantity of cement shall be increased by 10 percent above that specified.

3.2.3. Mixers which have been out of use for more than 30 minutes shall thoroughly cleaned before putting in a new batch. Unless otherwise agreed to by the Engineer in charge the first batch of concrete from the mixture shall contain only two thirds of normal quantity of coarse aggregate. Mixing plant shall be thoroughly cleaned before changing from one type of cement to another.

3.3. Consistency :

3.3.1. The degree of consistency which shall depend upon the nature of the work methods of vibration of concrete, shall be determined by regular slum tests in accordance with I.S. 1199-1939. The slump of 10 mm. to 25 mm. shall be adopted when vibrators are used and 80 mm. when vibrators are not used.

3.4. Inspection :

3.4.1. Contractor shall give the Engineer in charge due notice before placing any concrete in the forms to permit him to inspect and accept the false work and forms as to their strength, alignment and general fitness but such inspection shall not relieve the contractor of his

responsibility for the safety of men machinery, materials and for results obtained. Immediately before concreting all form shall be thoroughly cleaned.

3.4.2. Centering design and its erection shall be got approved from the engineer in charge. One carpenter with helper shall invariably be kept present throughout the period of concreting. Movement of labor and other persons shall be totally prohibited for reinforcement laid in position. For access to different parts suitable mobile platforms shall be provided so that steel reinforcement in position is not disturbed. For ensuring proper cover, mortar blocks of suitable size shall be cast and tied to the reinforcement. Timber, kapachi or metal pieces shall not be used for this purpose.

3.5. Transporting and laying :

3.5.1. The method of transporting and placing concrete shall be as approved. Concrete shall be so transported and placed that no contamination, segregation or loss of its constituent material takes place. All form work shall be cleaned and made free from sanding water dust, snow or ice immediately before placing of concrete. No concrete shall be placed in any part of the structure until the approval of the engineer in charge has been obtained.

3.5.2. Concreting shall proceed continuously over the area between construction joints. Fresh concrete proper contraction joint is formed. Concrete shall be compacted in its final position within 30 minutes of its discharge from the mixer. Except where otherwise agreed to by the engineer in charge, concrete shall be deposited in horizontal layers to compacted depth of not more than 0.45 meter when internal vibrators are used and not exceeding 0.30 meter in all other cases.

3.5.3. Unless otherwise agreed to by the Engineer in charge concrete shall be dropped in to place from height exceeding 2 meters. When trucking or chutes are used they shall be kept close and used in such a way as to avoid segregation. When concreting has to be resumed on a surface which has hardened, it shall be roughened, swept clean, the concrete mix itself. The 13 mm. layer of mortar composed of cement and sand in the same ratio as in the concrete mix itself. This 13 mm. layer of mortar shall be freshly mixed and placed immediately before placing of new concrete. Where concrete has not fully hardened, all laitance shall be removed by scrubbing the wet surface with wire be thoroughly wetted, all free water removed and then coated with neat cement grout. The first layer of concrete to be placed on this surface shall not exceed 150 mm. in thickness and shall be well rammed against old work, particular attention being given to corners and close spots.

3.5.4. All concrete shall be compacted to produce a dense homogeneous mass with the assistance of vibrators unless otherwise permitted by the Engineer in charge for exceptional cases, such as concreting under water, where vibrators cannot be used. Sufficient vibrators in serviceable condition shall be kept at site so that spare equipment is always available in the event of breakdowns. Concrete shall be judged to be compacted when the mortar fills the spaces between the coarse aggregate and begins to cream up to form an even surface. Compaction shall be completed before the initial setting starts i.e. within 30 min. of addition of water to dry mixture. During compaction it shall be observed that needle vibrators are not applied on reinforcement which is likely to destroy the bond between concrete and reinforcement.

3.6. Curing.

Immediately after compaction, concrete weather including rain, running water, shocks vibration traffic rapid temperatures changes, frost and drying out process. It shall be covered with wet sacking has Sian or other similar absorbent material approved, soon after the initial set and shall be kept continuously wet for a period of not less than 14 days from the date of placement. Masonry work over foundation concrete may be started after 48 hours of its laying but curing of concrete shall be continued for a minimum period of 14 days.

3.7. Sampling and testing of Concrete :

3.7.1. Samples from fresh concrete shall be taken as per I.S. 1199-1959 and cubes shall be made, cured and tested at 7 days of 28 days as per requirements in accordance with I.S. 526-1959. A random sampling procedure shall be adopted to ensure that each concrete batch shall have a reasonable chance of being tested i.e. the sampling should be spread over the entire period of concreting and cover all mixing units. The minimum frequency of sampling of concrete of each grade shall be in accordance with following:

Qty. of concrete in the work	No. of Samples	Qty. of concrete in the work	No. of Samples
1-5 cmt.	1	16-30 cmt.	3
6-15 cmt.	2	31-50 cmt.	4
51 and above	4± one additional for each additional 50 mm. or part thereof.		

Note : At least one sample shall be taken from each shift. Ten test specimens shall be made from each sample, five for testing at 7 days and remaining five at 28 days. The samples of concrete shall be taken on each day of concreting as per above frequency. The number of specimens may be suitable increased as deemed necessary by the Engineer in charge when procedure of test given reveals a poor quality of concrete and in other special cases.

3.7.2. The average of the group of cubes cast for each day shall not be less than the specified cube strength of 150 kg./Cm² at 28 days 20 % of the cubes cast for each day may have value less than the specified strength provided the lowest value is not less than 85 % of the specified strength. If the concrete made in accordance with the proportions given for a particular grade does not yield the specified strength, such concrete shall be classified as belonging to the appropriate lower grade. Concrete made in accordance with the proportions given for a particular grade shall not, however be placed in a higher grade on the ground that the test strength are higher then the min. specified.

FOR CONCRETE WORKS IN BEAM/ COLUMN/ SLAB/ STAIR STINGER ARE TO BE TESTED FOR FOLLOWING TEST IN PRESENCE OF ENGINEER IN CHARGE.

9.11 Rebound hammer test

The rebound hammer of a spring controlled mass that slides on a plunger within a tubular housing. the impact energy required for rebound hammers for different application is given in Table

SI.No.	Application	Approximate Impact Energy Required foe the rebound Hammers (Nm)
--------	-------------	---

i)	For Testing normal weight concrete	2.25
ii)	For Light-weight concrete or small and impact sensitive parts of concrete.	0.75
iii)	For test mass concrete for example in road, air fields pavement and hydraulic structures	30.00

Ultrasonic pulse velocity test (UPV)

The apparatus for Ultrasonic pulse velocity measurement shall consist of following:

- Electrical pulse generator,
- Transducer-one pair,
- Amplifier, and
- Electronic timing device

Acceptance criteria for concrete quality grading

Sl.No.	Pulse velocity by cross probing (kg/Sec)	Cement concrete quality grading
1	Above 4.5	Excellent
2	3.5 to 4.5	Good
3	3.0 to 3.5	Medium
4	Below 3.0	Doubtful

Note: In case of "doubtful" quality it may be necessary to carried out further tests of core test.

Core test

The points from which cores are to be taken and number of cores required shall be at the discretion of the engineer-in-charge and shall be representative of the whole of concrete concerned. In no case, however, shall fewer than three cores be tested.

Cores shall be prepared and tested as described in IS 516.

Concrete in the member represented by a core test shall be considered acceptable if the average equivalent cube strength of the cores is equal to at least 85 percent of the cube strength of the grade of concrete specified for the corresponding age and no individual core has a strength less than 75 percent.

3.8. Stripping :

3.8.1. The Engineer-in-charge shall be informed in advance by the contractor of his intention to strike the form work. While fixing the time of removal of formwork, due consideration shall be given to local conditions, character of the structure, the weather and other conditions that influence the setting of concrete and of the materials used in the mix.

In normal circumstance (generally where temperatures are above 20 ° C) and where ordinary concrete is used, forms may be struck after expiry or periods specified in item No. 9.1.(A) for respective item of form work.

3.8.2. All formwork shall be removed without causing any shock or vibration as would damage the concrete. Before the soft and struts are removed, the concrete surface shall be gradually exposed, where necessary in order to ascertain that concrete to take stresses due to its own weight uniformly and gradually and uniformly lowered in such a manner as to permit the or their removable parts shall be extracted without causing any damage to the

CUMMUNITY HALL

concrete and remaining holes filled with mortar. No permanently embedded metal part shall have less than 25mm. cover to the finished concrete surface. Where it is intended to reuse the formwork, it shall be cleaned and made good to the satisfaction of the Engineer in charge. After removal of form work and shuttering the Executive Engineer shall inspect the work and satisfy by random checks that concrete produced is of good quality.

3.8.3. Immediately after the removal of forms, all exposed bolts etc. passing through the cement concrete member and used for shuttering or any other purpose shall be cut inside the cement concrete member to a depth of at least 25 mm below the surface of the concrete and the resulting holes be filled by cement mortar. All fins caused by form joints all cavities produced by the removal of form tiles and all other holes and depressions, honeycomb spots, broken edges or corners and other defects, shall be thoroughly cleaned, saturated with water and carefully pointed and rendered true with mortar of cement and fine aggregate mixed in proportions used in the grade of concrete that is being furnished and of as dry consistency as is possible to use. Considerable pressure shall be applied in filling and pointing to ensure thorough filling in all voids. Surface which are pointed shall be kept moist for period of 25 hours. If rock pockets/honeycombs in the opinion of the Engineer in charge are of such an extent or character as to effect strength of the structure materially or to endanger the life of the steel reinforcement, he may declare the concrete defective and require the removal and replacement of the portions of structure affected.

4.0. Mode of measurement & Payment

4.1. The consolidated cubical contents of concrete work as specified in item shall be measured. NO deduction shall be made for (a) Ends of dissimilar materials such as joints, beams, posts, girders, falters, purling trusses, corbels and steps etc. up to 500 sq. cm. in section.

4.2. The rate includes cost of all materials labor, tools and plant required for mixing, placing in position vibrating and compacting, finishing, as directed, curing and all other incidental expenses for producing concrete of specified strength. The rate excludes the cost of formwork.

4.3. The rate shall be for a unit of one cubic meter

Item No.4 Providing and laying ordinary cement concrete 1:1.5:3 (1 cement, 1.5 sand, 3 graded stone aggregates 20 mm. Nominal size) and finishing smooth with curing etc. complete including the cost of formwork but excluding the cost of reinforcement of R.C.C. work in Column (iii) Having cross-sectional area more than 0.085 Sq.M. and up to 0.12 Sq.M.

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.3 R.C.C. WORK M-20 IN COLUMNS

Item No.5 Brickwork using common burnt clay building brick shaving crushing strength not less than 35 KG/Sqcm. in foundation and plinth in cement mortar 1:5(1 cement , 5 fine sand) Conventional bricks

1.0. Materials

Water shall conform to M-1, Cement shall conform to M-3, sand shall conform to M-6, Brick shall conform to M-15, Cement mortar shall conform to M-11.

1.0. Workmanship

2.1 Proportion :

2.1.1. The proportion of cement mortar shall be 1:6 or 1 : 5 (1 cement : 5 fine sand) by volume.as specified

2.2. Wetting of bricks :

2.2.1. The bricks required for masonry shall be thoroughly wetted with clean water for about two hours before use or as directed. The cessation of bubbles, when the bricks are wetted with water is as indication of through wetting of bricks.

2.3. Laying :

2.3.1. Bricks shall be laid in English bond unless directed otherwise. Half or cut bricks shall not be used except when necessary to complete to bond ; closures in such case shall be cut to required size and used near the ends of walls.

2.3.2. A layer of mortar shall be spread on full width for suitable length of the lower course. Each bricks shall first be property bedded and set some by gently tapping with handle of trowel or wooden mallet. Its inside face shall be flushed with mortar before the next brick is laid and pressed against it. On completion of course the vertical joints shall be fully filled from the top with mortar.

2.3.3. The walls shall be taken up truly in plumb. All courses shall be laid truly horizontal and all vertical joint shall be truly vertical. Vertical joints in alternate curse shall generally be directly one over the other. The thickness f brick course shall be kept uniform. The brick shall be laid with frog up wards. A set of tools comprising of wooden

2.3.4. straight edges, man son's spirit level, square half meter rub, and pins string and plumb shall be kept on the site of work for frequent checking during the progress of work.

2.3.5. Both the faces of walls of thic kness greater than 23 cms. Shall be kept in proper shall be kept not more than one meter over the rest of the work. Where this is not possible, the work shall be raked back according to bond(and not left toothed)at an angle not steeper than 45 degrees.

2.3.6. All futures, pipes, outlets of water, hold fasts of doors and window etc. which are require to be built in wall hall be embedded in cement mortar.

2.4. Joints

2.4.1. Bricks shall be so laid that all joints are quite flush with mortar. Thickness of joints shall not exposed 12 mm. The face joints shall be raked out as directed by raking tools daily during the progress of work, when the mortar is still in green so as to provide key for plaster of pointing to done.

2.4.2. The face of brick shall be cleaned the dropping removed.

very day on which the work is laid and all mortar

2.5. Curing :

2.5.1. Green work shall be protected from rain suitable. Masonry work shall be kept moist on all the faces for a period of seven days. The top of masonry work shall be kept well wetted at the close of the day.

2.6. Preparation of foundation bed :

2.6.1. If the foundation is to be laid directly on the excavated bed, the shall be leveled, cleared of all loose materials, cleaned and wetted before stating masonry, if masonry is to be laid on concrete footing, the top of concrete shall be cleaned and moistened. The contractor shall obtain the engineer's approval for the foundation bed before foundation masonry is started. When pucca flooring is to be provided flush with the top to plinth, the inside plinth offset shall be kept lower than the outside plinth top by the thickness of the flooring.

3.0. Mode of measurement & Payment.

- 3.1. The measurement of this item shall be taken for the brick masonry fully completed I foundation up to plinth the limiting dimensions not exceeding those shown on the plinths or as directed shall be final. Battered tapered and curved portions shall be measured net. No deduction shall be made from the quantity of brick work, for any extra payment made
- 3.2. for embedding in masonry of making holes in respect of following items :
- (1) Ends of joists, beams, posts, girders, purlins, trusses, corbel, steps etc. where cross sectional area does not exceed 500 sq. Cm.
 - (2) Openings not exceeding 1000 Sq. Cm.
 - (3) Wall plates and bed plates, bearing of slabs, chhajjas and the like whose thickness does not exceed 10 Cms. And the bearing does not extend to the full thickness of wall.
 - (4) Drainage holes, and recesses for cement concrete blocks to embed hold fasts for doors, windows etc.
 - (5) Iron fixtures, pipes up to 300 m. dia; hold fasts, and doors and windows built into masonry and pipes etc. for concealed wiring.
 - (6) Forming chases of section not exceeding 350 Sq. Cm. in masonry
- 3.3. Apertures for fire place shall not be deducted or shall be paid for separately. 3.4. The rate shall be for a unit of one cubic meter.

Item No.6 Providing & laying C.C. 1:1 1/2:3 (1 cement , 1 1/2 course sand, 3 graded stone agg. of 20mm nominal size) and finishing smooth with curring etc. comp. incl. the cost of formwork but excl. the cost of reinforcement for R.C.C. work in. (A) Beam :- Having cross sectional Area 0.085 to 0.12 Sqm. upto floor all level

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.3 R.C.C. WORK M-20 FOR BEAM

Item No.07 Providing & laying ordinary Cement Concrete 1:1 1/2:3 (1 cement , 1 1/2 course sand, 3 graded stone agg. of 20mm nominal size) exposed work with curring etc. comp. incl. the cost of formwork but excluding the cost of reinforcement for R.C.C. work in. SLAB :- Having more then 10cm. and end upto 13cm thickness.upto floor all level

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.3 R.C.C. WORK M-20 FOR SLAB

Item No.08 Providing & laying ordinary C.C. 1:1 1/2:3 (1 cement , 1 1/2 course sand, 3 graded stone agg. of 20mm Nominal size) and for R.C.C. LINTELS incl. Finishing smooth with curring of formwork but excl. the cost of reinforcement. for above floor upto Floor all level

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.3 R.C.C. WORK M-20 FOR LINTELS

Item No.09 Providing and laying cement concrete 1:1 1/2:3 (1 cement , 1 1/2 course sand, 3 graded stone add. of 20mm nominal size) for rein-forcement concrete CHHAJJAS not exceeding 10cm. thickness upto floor two level incl. finishing the exposed surface with C.M. 1:3 (1 cement , 3 fine sand) to give a smooth and ever surface, centering, formwork and curring comp.Excl. the cost of reinforcement.above plinth Upto floor all level.

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.3 R.C.C. WORK M-20 FOR CHHAJJAS

Item No.10 Thermo Mechanically treated bar F.E. 500 Steel reinforcement for R.C.C. work including bending, binding and placing in position complete upto floor all level

2.00 Materials :- T.M.T. shall conform to IS : 1789-FE 500/500D Mild steel bidning wires shall conform to the specification.

2.1 The work shall consist of furnishing and placing reinforcement of the shape and

dimensions shown on the drawing or as directed by the Engineer-in-charge.

2.2 Steel shall be clean and free from loose rust mill scale at the time of fixing in position and subsequent concreting.

2.3 Reinforcing steel shall conform accurately to the dimensions given iron bar bending schedules shown on relevant drawing. Bar shall be bent cold to the specified shape and dimensions or as directed by the Engineer-in-charge using a proper bar bender, operated by hand or power to attain proper radius of bends. Bars shall not be bent or straightened in manner that will injure the material. Bars bent during transporting or handling shall be straightened before use on work ; they shall not be invariably be provided. The radius of the bend shall not less than twice the diameter of the round bar and length of the straight part of the beyond the end of the curve shall be at least four times the diameter of the round bar. In the case which are not round and in the case of deformed bars, the diameter shall be taken as the diameter of a circle having a equivalent effective area. The work shall be suitably encased to prevent any splitting of the concrete.

2.4 All reinforcement bars shall be accurately placed in exact on the drawings, and shall be securely held in position during placing of concrete by annealed binding wire not less than 1mm, in size and conforming to IS : 280 and by using stay blocks or metal chairs, spacer, metal hangers, supporting wires or other approved device at sufficiently close intervals. Bars will not be allowed to sag between supports or displaced during concreting or any of their operations over the work. All devices used for positioning shall be non-corrodible material. Wooden and metal supports will not extend to the surface of concrete except where shown on the drawings. Placing bars on layers of freshly laid concrete as the work progress or adjusting bar will not be allowed. Pieces of broken stone or brick and wooden blocks shall not be used. Layers of bars shall be separated by spacer bars, precast mortar block, or other approved device. Reinforcement after being placed in position shall be maintained in clean condition until completely embedded in concrete. Special care shall be exercised to prevent any displacement of reinforcement in concrete already placed. To protect reinforcement from corrosion, concrete cover shall be provided as indicated on the drawing. All bars protruding from concrete and to which other bars are to spliced and which are likely to be exposed for an indefinite period shall be protected by a thick coat of neat cement grout.

2.5. Bars crossing each other, where required shall be secured by binding wire (annealed) of size not less than 1 mm. in such a manner that they do not slip over each other at the time of fixing and concreting.

2.6. As far as possible, bars of full length shall be used. In case this is not possible, overlapping of bars shall be done as directed by the engineer-in-charge. When practicable, overlapping bar shall not touch each other, but be kept apart by 25mm or 1.25 times the maximum size of the coarse aggregate whichever is greater, by concrete between them, Where not feasible, overlapping bars shall be bound with annealed steel wire, not less than 2mm thickness twisted right. The overlaps shall be staggered for different bars and located at points, along the span where neither shear nor bending movement is maximum. 2.7. Whenever indicated on the drawings or desired by the Engineer-in-charge, bar shall be joined by couplings which shall have a cross-section sufficient to transmit the full strength of bars. The end of the bars that are joined by coupling shall be upset for a sufficient length so that the effective cross-section at the base of threads shall be standard thread heads. Steel for coupling shall conform to IS : 226.

2.8. When permitted or specified on the drawings joints of reinforcement bars shall be but welded so as to transmit their full strength. Welded joints shall preferably be located at points

where steel will not be subject to more than 75 per cent of the maximum permissible stresses and welds so staggered that at any one section not more than 20 per cent of the rods are welded. Only electric arc are welded using a process which excluded air from the molten metal and conforms to any or all the special provisions for the work will be accepted. Suitable means shall be provided for holding the bars securely in position during welding. It must be ensured that no voids are left in welding and when welding is done in 2 or 3 stages, previous surface shall be cleaned properly. Ends of the bars shall be cleaned of all loose scale, rust grease, paint and other foreign matter before welding. Only competent welders shall be employed on the work. The M.S. electrodes used for welding shall conform to IS : 814 welded pieces of reinforcement shall be tested. Specimen shall be taken from the actual site and their number and frequency to test shall be as directed by the Engineer-in-charge. **MEASUREMENTS**

FOR PAYMENT

Reinforcement shall be measured in length including hooks, if any, separately for different diameters as actually used in work, excluding overlaps. From the length so measured, the weight of reinforcement shall be calculated in tonnes on the basis of IS: 1732. Wastage, overlaps, couplings, welded joints, spacer bars, chairs, stays, hangers and annealed steel wire or other methods for binding and placing shall not be measured and cost of these items shall be deemed to be included in the rates for reinforcement.

RATE

The contract unit rate for coated/uncoated reinforcement shall cover the cost of material, fabricating, transporting, storing, bending, placing, binding and fixing in position as shown on the drawings as per these specifications and as directed by the Engineer, including all labour, equipment, supplies, incidentals, sampling, testing and supervision.

The unit rate for coated reinforcement shall be deemed to also include cost of all material, labour, tools and plant, royalty, transportation and expertise required to carry out the work. . The rate shall also cover sampling, testing and supervision required for the work.

Mode of Measurement and Payment

The rate shall be for a unit of One Kg

Item No.11 Filling available excavated earth (excluding rock) in trenches. plinth, sides of foundations etc. in layers not exceeding 20 cm.in depth consolidating each disposed layer by ramming and watering

1.0. Workmanship

1.1. The earth to be used for filling shall be free from salts, foreign organic or other matter. All clods of earth shall be broken.

1.2. As soon as the work in foundation has been completed and measured the site of foundation shall be cleared of all debris, bricks bats, mortar dropping etc. and filled with earth in layers not exceeding 20 cms. Each layer shall be adequately watered, rammed and consolidated before the succeeding layer is laid. The earth shall be rammed with iron rammers where feasible and with the but ends of crow- bars where rammer cannot be used.

1.3. The plinth shall be similarly filled with earth in layers not exceeding 20 Cms. Adequately watered and consolidated by ramming with iron or wooden rammers.

When filling reaches finished level the surface shall be flooded with water for at least 24 hours and allowed to dry and then rammed and consolidated.

1.4. The finished level of filling shall be kept to shape intended to be given to floor. **1.5.** In case off large heavy duty flooring like factory flooring, the consolidation may be done by power rollers where so specified. The extent of consolidation required shall also be as specified.

1.6. The excavated stuff of the selected type shall be allowed to be used in filling the trenches and plinth. Under no circumstances black cotton soil be used for filling the plinth.

Item No.12 Providing 15mm thick cement plaster in single coat on fair side of Brick/concrete walls for interior plastering upto floor two level and finished even and smooth in (i) Cement mortar 1:3 (1-cement:3-sand) .Uoto floor all level

1.0. Materials

Water shall conform to M-1, The cement mortar of proportion 1 : 3 shall conform to M-13. **2.0. Workmanship**
Scaffolding :

Wooden bullies, bamboos, planks trestles and other scaffolding shall be sound. These shall be properly examined before erection and use. Stage scaffolding shall be provided for ceiling plaster which shall be independent of the walls.

2.2. Preparation of back ground :

2.2.1. The surface shall be cleaned of all dust, loose mortar droppings, traces of algae, afflorescence and other foreign matter by water or by brushing if it is not hard and by hacking if it hard. In case of concrete surface, if a chemical retarder has been applied to the form work, the surface shall be roughened by wire brushing and all the resulting dust and loose particles cleaned off and the care shall be taken that none of the retarder if left on the surface. Trimming of projections o brick concrete surfaces where necessary shall be carried out to get an even surface.

2.2.2. Raking of joints in case of masonry where necessary shall be allowed to dry out for sufficient period before carrying out the plaster work.

2.2.3. The work shall not be soaked but only damped evenly before applying plaster .if the surface becomes dry such area shall moistened again.

2.2.4. For external plaster, pestering operation shall be started from top floor and carried downwards. For internal plaster, the plastering operations may be started wherever the building frame cladding work are ready and temporary supports of the ceiling resting on the wall of the floor have been removed . Ceiling plaster shall be completed before starting later to walls.

2.3. Application of plaster :

2.3.1. The plaster about 15 x 15 cms. shall be first applied horizontally and vertically at not more than 2 meters intervals over the entire surface to serve as gauge. The surfaces of these gauges shall be truly in plane of the finished plastered surface. The mortar shall then be applied in uniform surface slightly more than the specified thickness, then brought to a true surface working a wooden straight edge reaching across the gauges with small upward and sideways movements at a time. Finally the surface shall be finished off trued with a trowel or wooden float according as a smooth or a smooth or a sandy granular texture is

CUMMUNITY HALL

required. Excessive troweling or over working the float shall be avoided. All corners, arises, angles and junctions shall be truly vertical or horizontal as the case may be and shall be carefully finished. Rounding or chamfering, corners, arises junctions etc. shall be carried out with proper templates to be size required.

2.3.2. Cement plaster shall be used within half an hour after addition of water. And mortar or plaster which is partially set shall be rejected and removed forthwith from the site.

2.3.3. In suspending the work at the end of the day, the plaster shall be left out clean to the line both horizontally and vertically. When recommencing the plaster, the edges of the old work shall be scraped clean and wetted with cement putty before plaster is applied to the adjacent areas to enable the two to properly join together. Plastering work shall be closed at the end of the day on the body of the wall and nearer than 15 cm. to any corners or arise. Horizontal joints in plaster work shall not also occur on parapet tops and copings as these invariably lead to leakage. No portion of the surface shall be left out initially to be packed up later on.

2.3.4. Each coat shall be kept damp continuously till the next coat is applied or for a minimum period of 7 days. Moistening shall commence as soon as plaster is hardened sufficient. Soaking of walls shall be avoided side of building in hot air or dry weather shall be used, excessive evaporation on the sunny or windward side of building hot air or dry weather shall be prevented by hanging matting or gunny bags on the outside of the plaster and keeping them wet.

3.0. Mode of measurements & payment.

3.1. The rate shall include the cost of all materials, labor and scaffolding etc. involved in the operations described under workmanship.

3.2. All plastering shall be measured in square meter unless otherwise specified. Length breadth or height shall be measured correct to a centimeter.

3.3. Thickness of the plaster shall be exclusive of the thickness of the key i.e. grooves or open joints in brick work, stone work etc. or space between laths. Thickness of plaster shall be average thickness with minimum 10 mm. at any point on this surface.

3.4. The item includes plastering up to floor two level.

3.5. The measurement of wall plastering shall be taken between the walls or partition(dimensions before plastering being taken)for length and from the top of floor or skirting to ceiling for height. Depth of cover of cornices if any shall be deducted.

3.6. Soffits of stairs shall be measured as plastering on ceilings, following soffits shall be measured separately.

3.7. For jambs, soffits, sills etc. for openings not exceeding 0.5 sq.mt. each in area for ends of joints beams, posts, girders, steps etc. not exceeding 0.5 sq. mt. each in area and for openings exceeding 0.5 sq. mt. and not exceeding 3.00 sq. mt. in each area deductions and additions shall be made in the following manners.

(a) No deductions shall be made for ends of joints, beams, posts etc. and openings not exceeding 0.5 sq. mt. each and no addition shall be made for reveals, jambs, soffits, sills etc. of these openings, for finish to plaster around ends of joints, beams posts etc.

(b) Deduction for openings exceeding 0.5 sq. mt. but not exceeding 3 sq. mt. each shall be made as follows and no addition shall be made for ravel, jambs, soffits, sills etc. of these openings.

(i) When both faces of all wall are plastered with same plaster, deduction shall be made for one face only.

(ii) When two faces of wall are plastered with different types of plasters or if one face is plastered and the other pointed, deductions shall be made from the plaster of pointing on

the side of frame for door, window etc. on which width of reveals is less than that on the other side but no deductions shall be made on the other side. Where width of reveals on both faces of all are equal, deductions of 50 % of area of opening on each face shall be

made from areas of plaster and/or pointing as the case may.

3.8. For openings having door frames equal to or projecting beyond the thickness of wall, full deduction for opening shall be made from each plastered face of the wall.

3.9. In case of openings of area above 3 sq. mt. each deduction shall be made for openings but jambs, soffits and sills shall be measured.

3.10. The rate shall be for a unit of One sq. meter.

Item No.13 Providing 10mm thick cement plaster in single coat on fair side of Brick/concrete walls for interior plastering upto floor all level and finished even and smooth in (i) Cement mortar 1:3 (1-cement:3-sand) .Upto floor all level finished even & Smooth with floating coat of neat cement slurry.

1.0. Materials

Water shall conform to M-1, The cement mortar of proportion 1 : 3 shall conform to M-13. **2.0. Workmanship Scaffolding :**

Wooden bullies, bamboos, planks trestles and other scaffolding shall be sound. These shall be properly examined before erection and use. Stage scaffolding shall be provided for ceiling plaster which shall be independent of the walls.

2.2. Preparation of back ground :

2.2.1. The surface shall be cleaned of all dust, loose mortar droppings, traces of algae, efflorescence and other foreign matter by water or by brushing if it is not hard and by hacking if it hard. In case of concrete surface, if a chemical retarder has been applied to the form work, the surface shall be roughened by wire brushing and all the resulting dust and loose particles cleaned off and the care shall be taken that none of the retarder is left on the surface. Trimming of projections on brick concrete surfaces where necessary shall be carried out to get an even surface.

2.2.2. Raking of joints in case of masonry where necessary shall be allowed to dry out for sufficient period before carrying out the plaster work.

2.2.3. The work shall not be soaked but only damped evenly before applying plaster .if the surface becomes dry such area shall be moistened again.

2.2.4. For external plaster, plastering operation shall be started from top floor and carried downwards. For internal plaster, the plastering operations may be started wherever the building frame cladding work are ready and temporary supports of the ceiling resting on the wall of the floor have been removed . Ceiling plaster shall be completed before starting later to walls.

2.3. Application of plaster :

2.3.1. The plaster about 15 x 15 cms. shall be first applied horizontally and vertically at not more than 2 meters intervals over the entire surface to serve as gauge. The surfaces of these gauges shall be truly in plane of the finished plastered surface. The mortar shall then be applied in uniform surface slightly more than the specified thickness, then brought to a true surface working a wooden straight edge reaching across the gauges with small upward and sideways movements at a time. Finally the surface shall be finished off trued with a trowel or wooden float according to a smooth or a smooth or a sandy granular texture is

CUMMUNITY HALL

required. Excessive troweling or over working the float shall be avoided. All corners, arises, angles and junctions shall be truly vertical or horizontal as the case may be and shall be carefully finished. Rounding or chamfering, corners, arises junctions etc. shall be carried out with proper templates to be size required.

2.3.2. Cement plaster shall be used within half an hour after addition of water. And mortar or plaster which is partially set shall be rejected and removed forthwith from the site.

2.3.3. In suspending the work at the end of the day, the plaster shall be left out clean to the line both horizontally and vertically. When recommencing the plaster, the edges of the old work shall be scraped clean and wetted with cement putty before plaster is applied to the adjacent areas to enable the two to properly join together. Plastering work shall be closed at the end of the day on the body of the wall and nearer than 15 cm. to any corners or arise. Horizontal joints in plaster work shall not also occur on parapet tops and copings as these invariably lead to leakage. No portion of the surface shall be left out initially to be packed up later on.

2.3.4. Each coat shall be kept damp continuously till the next coat is applied or for a minimum period of 7 days. Moistening shall commence as soon as plaster is hardened sufficient. Soaking of walls shall be avoided side of building in hot air or dry weather shall be used, excessive evaporation on the sunny or windward side of building hot air or dry weather shall be prevented by hanging matting or gunny bags on the outside of the plaster and keeping them wet.

3.0. Mode of measurements & payment.

3.1. The rate shall include the cost of all materials, labor and scaffolding etc. involved in the operations described under workmanship.

3.2. All plastering shall be measured in square meter unless otherwise specified. Length breadth or height shall be measured correct to a centimeter.

3.3. Thickness of the plaster shall be exclusive of the thickness of the key i.e. grooves or open joints in brick work, stone work etc. or space between laths. Thickness of plaster shall be average thickness with minimum 10 mm. at any point on this surface.

3.4. The item includes plastering up to floor two level.

3.5. The measurement of wall plastering shall be taken between the walls or partition(dimensions before plastering being taken)for length and from the top of floor or skirting to ceiling for height. Depth of cover of cornices if any shall be deducted.

3.6. Soffits of stairs shall be measured as plastering on ceilings, following soffits shall be measured separately.

3.7. For jambs, soffits, sills etc. for openings not exceeding 0.5 sq.mt. each in area for ends of joints beams, posts, girders, steps etc. not exceeding 0.5 sq. mt. each in area and for openings exceeding 0.5 sq. mt. and not exceeding 3.00 sq. mt. in each area deductions and additions shall be made in the following manners.

(a) No deductions shall be made for ends of joints, beams, posts etc. and openings not exceeding 0.5 sq. mt. each and no addition shall be made for reveals, jambs, soffits, sills etc. of these openings, for finish to plaster around ends of joints, beams posts etc.

(b) Deduction for openings exceeding 0.5 sq. mt. but not exceeding 3 sq. mt. each shall be made as follows and no addition shall be made for ravel, jambs, soffits, sills etc. of these openings.

(i) When both faces of all wall are plastered with same plaster, deduction shall be made for one face only.

(ii) When two faces of wall are plastered with different types of plasters or if one face is plastered and the other pointed, deductions shall be made from the plaster of pointing on

CUMMUNITY HALL

the side of frame for door, window etc. on which width of reveals is less than that on the other side but no deductions shall be made on the other side. Where width of reveals on both faces of all are equal, deductions of 50 % of area of opening on each face shall be

made from areas of plaster and/or pointing as the case may.

3.8. For openings having door frames equal to or projecting beyond the thickness of wall, full deduction for opening shall be made from each plastered face of the wall.

3.9. In case of openings of area above 3 sq. mt. each deduction shall be made for openings but jambs, soffits and sills shall be measured.

3.10. The rate shall be for a unit of One sq. meter.

Extra over item 51 to 65 for finishing with a floating coat of neat cement slurry. 1.0. Materials & Workmanship.

1.1. The relevant specifications of item No. 17.58 and 17.61 shall be followed for materials and workmanship except that this work is only providing smooth cement finish with floating coat of neat cement slurry.

1.2. The coat of cement and fine sand mortar of proportion 1 : 1 (1.5 mm. thick about) shall be applied to the plastered surface with a trowel to provide uniform texture while the base coat is still plastic.

1.3. In any continuous face of wall the finishing treatment should be carried out continuously and day to day breaks made to coincide with architectural breaks in order to avoid unsightly junctions.

1.4. Curing : All the plaster work shall be kept damp continuously for a period of 7 days.

2.0. Mode of measurement and payment

2.1. The payment shall be made for a unit of 1.0. sq. mt. of work done over and above the finishing of work of base coat.

2.2. The relevant specifications of item of base coat shall be followed for measurements and payment.

2.2. The rate shall be for a unit one sq. meter.

Item No.14 Providing and laying polished kota stone slab 25mm thick in risers of steps, skirting, Dedo and pillars laid on 10mm thick cement mortar 1:3 (1-Cement : 3 coarse sand) and jointed with gray cement slurry mixed with pigment to match the shade of slab including rubbing and polishing etc. complete.

1.0. Materials

Water shall conform to M-1, Lime mortar shall conform to M-10, Cement mortar shall conform to M-11, Kota stone slab 25 mm. thick shall conform to M-49

2.0. Workmanship

2.1. The relevant specifications of as per Below shall be followed except that the kota stone shall be fixed for risers of steps, dedo or skirting in C.M. 1 : 3 and the polishing shall be manually instead of machine polishing.

2.1. Each slab shall be cut to the required size and shape and fine chisel dressed at all the edges. The sides thus dressed shall have a full contact if a straight edge is laid along. The sides shall be table rubbed with coarse sand before paving. All angles and edges of the slabs shall be true square and free from chippings and giving a plane surface. The thickness shall

be 25 mm. (Average) as specified in the item but not less than 20 mm. at any place of the slab.

2.2. Bedding for Kota stone slabs shall be of Exterior mortar 1: 6 (1 Exterior : 6 coarse sand) or L.M. 1 : 1.5 of average thickness 20 mm. given in the description of the item. Sub grade shall be cleaned, wetted and mopped. Mortar of specified mix and thickness shall then be spread on an area sufficient to receive one kota stone slab. The slab shall be washed

clean before laying. It shall be laid on top, pressed, tapped gently to bring it in level with other slabs. It shall then be lifted and laid aside. Top surface of the mortar shall then be corrected by adding fresh mortar at hollows or depressions. The mortar shall then be allowed to harden bit. Over this surface, Exterior slurry of honey like consistency shall be applied.

The slab shall then be gently placed in position and tapped with wooden mallet till it properly padded in level with and close to the adjoining slab. The joint shall be as fine as possible.

The slabs fixed in the floor adjoining the walls shall enter not less than 10 mm. under the plaster, skirting or dedo. The junction between the wall and floor shall be finished neatly.

The finished surface shall be true to levels and slopes as directed.

2.3. The floor shall be kept wet for a min. period of 7 days so that bedding and joints set properly.

2.4. Polishing shall be normally commenced after 14 days of laying the stone slab. First polishing shall be done with carborundum stone of 220 to 350 grade grit fitted in heavy machine. Water shall be Engineer in charge wax polish of approved quality shall be applied on the surface with the help of soft cloth over a clean and dry surface. Then the polishing machine fitted with bobs shall be run over it.

2.5. The holes required for nahni traps, pipes and any other fittings shall be made without any extra cost.

3.0. Mode of measurements and payment

3.1. The risers of steps, skirting or dedo shall be measured in sq. meter. Length shall be measured along the finished faces of risers, skirting or dedo. Height shall be measured from finished level of treads of floor to top. Lining of pillars shall be measured under this item.

3.2. The rate shall be for a unit of one sq. meter.

Item No.15 Pro. /Fix. Steel door having of 40x40x5mm. Iron angle, & Double Shutter arrangement, shutter frame of 30x30x4mm. Iron Angle and B.G. 22 Gauge Plate with Hold fasts, Iron hinges, handles, stopper, locking arrangement etc. comp. Steel welded is built up section of oil painting over coat of primer coat etc. comp

1.0. Materials

The structured steel work shall conform to M-22, Red lead paint shall conform to I.S. 102-1962.

2.0. Workmanship

2.1. The steel sections as specified or required shall be cut, square and to correct lengths, as per drawings and design. The cut ends exposed to view shall be finished smooth. No two pieces shall be welded or otherwise jointed to make up the required length of member except as indicated in the drawing or as directed. All straightening

and shaping to form shall be done by application of pressure and not by hammering. Any bending or cutting shall be carried out in such a manner as not to impair the strength of the metal. All operations shall be done in cold state unless otherwise directed/permitted.

2.2. Steel riveted or bolted in built up sections, frame work.

2.2.1. The steel structure as shown in the drawings or as per direction of the Engineer in charge shall be laid out on a level platform to full scale and to full size in parts. A steel tape shall be used for measurements to ensure max. accuracy.

2.2.2. Wooden templates 12 mm. to 19 mm. thick or metal sheet template shall be made to correspond to each connecting gussets plate and rivet holes shall be accurately marked on them and drilled. The templates shall be laid on the steel members and holes of the steel members and holes of the steel members shall also be marked for curing. The base of steel column and the position of Anchor bolts shall be carefully set out.

2.2.3. All stiffeners shall be formed by pressure and where practicable, the metal shall not to be cut and welded in making these. In major works or where so specified shop drawings giving complete details and in formations for the fabrication of the component parts of the structure. Including location type size length and details or rivets, bolts or weld shall be prepared in advance of the actual fabrication and as distinctly marked or stenciled with paint with the identification mark as given in the stop drawings. The bars shall be thickened at the ends, so as to provide for screwed threaded and gradually tapered off to meet their normal section.

Great accuracy shall be observed in fabrication of various member, so that these can be assembled without being unduly packed, stained or forced into the position and when build up shall be true and free from twists brinks buckles or open joints.

Before making holes in individual members for fabrication the steel work intended to be riveted or bolted together shall be as embed or clamped properly and tightly so as to ensure close abutting or lapping or the surfaces of the different members. All stiffeners shall bear tightly both at top and bottom without being drawn or caulked. The abutting joints shall be cut or crossed true and straight and fitted close together. Web splice plates and fillers under stiffeners shall be cut to fit within 3 mm. or flange Angles Web plates of girders shall have no cover. Plates shall have their ends flush with the top of angles forming the flanges unless otherwise required. The web plates when spiced shall have clearance of not more than 6 mm.

The erection, clearance for cleated ends of members connecting steel shall preferably be not greater than 1.5 mm. The erection, clearance at the ends of beams without web cleats shall not be more than 3 mm. at each end but where for a practical reason greater clearance is necessary suitably designed seating shall be provided. Pains and rollers shall be accurately tuned to gauge. These straight and smooth and free from flows. The roller bearing shall be provided with adequate arrangements for holding the girders or truss resting on it. In column caps and bases the ends of ships together with the attached gussets. Angles, channels etc. after riveting together shall be accurately mechanized so that the parts connected butt against each other over the entire surfaces of contact connecting angles or channels shall be fabricated and

placed in position with greater accuracy so that they are not unduly reduced in thickness by machining. The ends of bearing stiffeners shall be mechanized or ground to fit tightly both at the top and bottom. All holes shall generally be drilled to the required size and at required. Position. Sub punching shall be permitted provided it is done 3 mm. or less in diameter and reamed thereafter to the required size. The holes for rivets and bolts shall be larger by 0.4 to 6 mm. than the nominal diameter of rivets or black bolts depending upon the diameter of rivets. Holes

shall have their axis perpendicular to the surface bored through. The drilling or remarrying shall be free from butts, and the holes should be clean and accurate holes for counter shrunk bolts shall be made in such a manner that their heads fit flush with the surface after fixing.

The fabrication work shall be completed in workshop as far as it is practicable to do so. Site joints shall be done with rivets and fitted bolts or black bolts, as shown in the drawings or as directed. Generally the following principles shall govern the use of rivets turned and fitted bolts and block bolts.

- (i) Rivets and turned and fitted bolts shall be used where the connection is such that slip under load has to be avoided.
- (ii) Black bolts may be used very sparingly where a force is carried through a connection without impact vibration or reversal or stresses.

2.2.4. Riveting :

The parts assembled for riveting shall be in close contact with each other and the bearing stiffeners shall bear tightly bolt at top and bottom without being drawn or caulked. Member to be riveted shall be properly pinned or bolted and rigidly held to gather while riveting. Drifting of holes shall not be permitted except to draw the parts together and the drifting tools so used shall have max. diameter not exceeding the nominal diameter of rivets or bolts. Drifting done during assembling shall not distort the metal or enlarge the holes.

The shanks of rivets shall project beyond the plate surface sufficiently so as to fill hole thoroughly and form the required head after riveting.

The riveting shall be done by hydraulic or pneumatic process. However where such facilities are not temperature of heating so as not to but the steel. Rivers of diameter less than 10 mm. may be fitted cold. Rivets shall be of heat finish with heads full and of equal size. All those burnt or badly formed reverts with concentric or deficient heads shall be cut out and replaced. The heads of rivets shall be central to shanks and shall grip the assembled member firmly. In cutting out rivets, care shall be taken so as not be injure assembled members, caulking or reequipping shall not be permitted.

For testing rivets, a hammer weighing approximately 0.25 kg. shall be used. Both heads of the rivets shall be tapped, stack rivets will give a hollow sound an a jar.

All rivet heads shall be painted with red lead paint within a week of their fixing.

2.2.5. All bolt heads and nuts shall be hexagonal of equal size unless specified otherwise. The screwed heads shall conform to I.S. 1363-1960 and the threaded surface shall not be tapered. the bolts shall be of such length so as to project two

clear threads beyond the nuts when fixed in position and these shall fit in the holes without any shakes. The nut shall be fit in the threaded ends of bolts properly.

Where turned and fitted bolts are required to be used in place of rivets shall be provided with washers not less than 6 mm. thick so that the nut when tightened shall not bear on the unthreaded body of the bolt. Tapered washers shall be provided for all heads and nuts bearing on leveled surfaces. The threaded portion of the bolt shall not be within the thickness of the parts bolted together the faces of the bolt heads and nuts abutting against steel members shall be machine finished. Where there is a risk of the nut being removed or becoming loose due to vibrations or reversal of stresses, these shall be secured from slackening by the use of locknuts, spring washers, cross cutting or hammering down of threads as directed.

Bolts nuts and washers shall be thoroughly cleaned and dipped in double boiled linseed oil before use. The whole steel work shall be painted with a coat of priming coat of red lead, as per relevant specification of painting.

3.0. Mode of measurements & payments

3.1. The steel work shall be measured in general as under.

- (a) All work shall be measured on the basis of finished dimensions as fixed at site and measured net unless specified otherwise.
- (b) The weight of steel sections, steel rods, and steel strips in finished work shall be calculated from standard weight on the same basis on which steel is supplied to contractor by department or those given in relevant I.S. if steel is arranged by the contractor.
- (c) The weight of steel plates and strips shall be taken from relevant I.S. based on 6.85 kg/sq. meter for every millimeter sheet thickness if steel is supplied to the contractor by department.
- (d) Unless otherwise specified, weight of cleats, brackets, packing pieces, bolts nuts washers distance pieces, separators, diaphragm gusset (taking overall squared dimensions) fish plates etc. shall be added to the weight of respective items.
- (e) In riveted work allowance is to be made for weight of rivet hands. No deductions shall be made for rivet or bolt holes excluding holes for anchor or holding down bolts.
- (f) For forged steel and steel casting, weight shall be calculated on the basis of 7850 kg. /cum.
- (g) Unless otherwise specified, no allowance shall be made for weld metal in case of welded steel structure.
- (h) Dimensions other than cross sections and thickness of plates shall be measured to nearest 0.001 m.
- (i) Mill tolerance shall be ignored when weight is determined by calculation.

3.2. The rate includes cost of all material, labor, erection, hoisting scaffolding protective measured required for proper completion of the item of work. This shall also include conveyance and delivery handling loading, unloading storing etc. required for completing the item described above including necessary wastage involved.

For Shutters**1.0. Materials**

M.S. steel shutters shall be fabricated of M.S. component as given in the description of item M.S. sheets 1 mm. thick shall be fixed to the frame with rivets or weld as approved. The shutters shall be provided with top and bottom Angles. The frame shall be riveted and/or welded and wherever riveting shall be done 3.15 mm. gussets plates shall be provided at the junctions.

2.0. Workmanship

2.1. The shutters shall be single or double leaf shutters as specified. The guide rails shall be sufficiently long and continued along the wall on the both ends so that the steel shutters can rest against walls, leaving full opening when so required.

2.2. The guide rails shall be fixed to the floor by means of anchor bolts embedded in the cement concrete floor. The steel section at the top shall be suitably supported from the walls. Two channel section shall suitably fixed vertically below the extreme clamps in the wall and floor to avoid the shutters from going out of the supports at the top and bottom. A suitable clamping arrangement will be provided at either end of the opening to avoid the shutters from rolling back into opening.

2.2. All the adjoining work damaged while fixing shall be made good to match the existing work.

2.3. All members of the steel shutter including T-iron shall be thoroughly cleaned of rust scales dust etc. and given a priming coat of red lead before fixing them in position.

3.0. Mode of measurements & payment.

3.1. The steel doors shall be measured on sq. meter. The height of the shutters shall be measured from outside to outside of Angle and width outside to outside of shutters including vertical channels in sides. The rate includes providing handles, stoppers and locking arrangements etc. complete.

3.2. The rate shall be for a unit of one sq. meter.

Item No.16 Providing and fixing window having extruded aluminum

Colour anodized section frame main outer size $63.50 \times 38.10 \times 1.95$ mm (of jindal Section no:4605, @ Wt 1.094 Kg/Rmt), horizontal two track member size $61.85 \text{ mm} \times 31.75 \text{ mm} \times 1.20 \text{ mm}$ (of jindal Section no:8687, @ Wt 0.695 Kg/Rmt), vertical member of size $61.85 \text{ mm} \times 31.75 \text{ mm} \times 1.30 \text{ mm}$ (of jindal Section no:8758 @ Wt 0.659 Kg/Rmt) with sliding shutter of horizontal member size $40 \text{ mm} \times 18 \text{ mm} \times 1.29 \text{ mm}$ (of jindal Section no:8949 @ wt. of 0.456Kg/mt, vertical member of size $40 \text{ mm} \times 18 \text{ mm} \times 1.29 \text{ mm}$ (of jindal Section no:8947 @ wt. of 0.456Kg/mt/ Section 8948, @ Wt 0.457 Kg/mt) with 5 mm thick transparent bronze colour tinted float glass with powder coated aluminum fitting and fixtures and transparent silicon sealant glass fixing to frame as per details etc complete for window.

SPECIFICATION SHALL APPLY AS PER IS:1948 ATTACHED

Item No.17 Distempering(Twocoats) with oil bound distemper of approved brand and manufacture and of required shade on wall surfaces to give an even shade, over and including a priming coat with distemper primer of approved brand and manufacture after thoroughly brushing the surface free from mortar dropping and other foreign matter and also including preparing the surface even and sand papered smooth.

1.0. Materials

1.1. Oil bound washable distemper and primer shall be of approved brand and manufacture. The distemper shall be of required color and shade and the same shall conform to I.S. 428-1969.

2.0. Workmanship.

2.1. Scaffolding

Where scaffolding is required it shall be erected in such a way that as far as possible no part of scaffolding shall rest against the surface to be distempered. A properly secured and well tied suspended platform(Joola) may be used for distempering. Where ladders are used, pieces of old gunny bags shall be tied at top and bottom to prevent scratches to the walls and floors. For distempering to ceiling, proper stage scaffolding shall be erected where necessary.

2.2. Preparation of surface :

2.2.1. The undecorated surface to be distempered shall be thoroughly brushed from dust, dirt, grease, mortar dropping and other foreign matter and sand papered smooth. New plaster surface shall be allowed to dry for at least 2 months before applications of distemper. **2.2.2.** All unnecessary nails shall be removed. Pitting in plaster shall be made good with plaster again with a line grade sand paper and made smooth. A coat of distemper shall be applied over the patches. The surface shall be allowed to dry thoroughly before the regular coat of distemper is allowed. The surface affected by moulds, moss, fungi, algae lichens, efflorescence etc. shall be treated in accordance with I.S. 2395-(Part-I)1966. Before applying distempering, any unevenness shall be made good by applying putty made of plaster of paris mixed with water on entire surface including filling up the undulation and then sand papering the same after it is dry :

2.3. Priming coat :

2.3.1. A priming coat of distemper primer of approved manufacture and shade shall be applied over the papered surface in case of new work on undecorated surface. If the distemper priming is done after the wall surface dries completely the distemper primer shall be applied. **2.3.2.** Application of primer shall be done as under : The primer shall be applied with a brush on the clean dry and smooth surface. Horizontal strokes shall be given first and vertical strokes shall be applied immediately afterwards. This entire operation will constitute coat. The surface shall be finished as uniformly as possible leaving no brush marks. It shall be allowed to dry for at least 48 hours before oil bound distemper or paint is applied. **2.3.3.** Oil bound distemper is not recommended to be applied within six months of the completion of wall plaster.

2.4. Preparation of oil bound distemper :

2.4.1. The distemper shall be diluted with water or any other prescribed thinner in manner recommended by the manufacturer only. Sufficient quantity of distemper required for a days work shall be prepared.

2.5. Application of Distemper coat :

2.5.1. For undecorated surfaces, after the primer coat is dried for at least 48 hours, the surface shall be lightly sand papered to make smooth for receiving the distemper, taking care not to rub out priming coat. All loose particles shall be dusted off after rubbing.

Minimum two coats of distemper shall be applied with brushes in horizontal strokes followed immediately by vertical strokes which together shall constitute one coat. The subsequent coats shall be applied after a time interval of at least 24 hours between consecutive coats to permit proper drying of the preceding coat. The finished surface shall be even and uniform without patches, brush marks, distemper drops etc.

2.5.2. Sufficient quantity of distemper shall be mixed to finish one room at a time. The application of a coat in each room shall be finished in one operation and no work shall be started in any room which can not be completed on the same day.

2.5.3. 15 cm. double bristled distemper brush shall be used. After day's work brushed shall be thoroughly washed in hot water with soap solution and hung down to dry. Old brushes which are dirty and caked with distemper shall not be used on the work.

2.6. Protective measurements : The surfaces of doors, windows, floors, articles of furniture etc. and such other parts of the buildings as are not to be distempered shall be protected from being splashed upon. Such surfaces shall be cleaned of distemper splashes if any.

3.0 Mode of measurements & payment

3.1. Priming coat of distemper primer, scraping of surface spoiled by strunk soots, removal of oil and grease spots, treatment for infraction of effloresces., mould moss, fungi, algae and lichen and patch repairs to plaster shall be included in this item for which nothing extra shall be paid.

3.2. All the work shall be measured net in the decimal system as in place subject to the following limit unless otherwise stated hereinafter :

(a) Dimensions shall be measured to the nearest 0.01 m.

(b) Area in individual items shall be worked out to the nearest 0.01 sq. m. All work shall be made for ends of joints, beams posts etc., and openings, not exceeding 0.5 sq. mt. each and no addition shall be made for reveals, jambs, soffits, sills etc. of these openings not for around ends of joints, beams posts etc.

3.3. Deductions of openings exceeding 0.5 sq. mt. but not exceeding 3 sq. m. each shall be made as follows and net addition shall be made for reveals, jambs, soffits etc. of these openings :

(a) When both the faces of wall are provided with same finish, deductions shall be made for one face only.

(b) When each face of wall is provided with different finish, deduction shall be made for that side of frame for doors, windows etc. on which width of reveals is less than that of the other side but no deduction shall be made on the other side. Where the width of reveals on the both the faces of wall are equal, deduction of 50 % of area of opening on each face shall be made from area of finish.

(c) When only one face of wall is treated and the other face is not treated, full deductions shall be made if the width of the reveal on treated side is less than that on untreated side but if the width of the reveals is equal or more than that on untreated side neither deductions nor additions to be made for reveals, jambs, soffits, sills etc.

- 3.4. In case of openings of area exceeding 3 sq. mt. each deduction shall be made for openings but jambs sills and soffits shall be measured.
- 3.5. No deductions shall be made for attachments such as casings, conduits, pipes, electric wiring and the like.
- 3.6. Item includes removing nails, making good holes, patches with materials similar in composition of distemper.
- 3.7. The rate includes cost of all materials, labors, scaffolding, protective measures etc. involved in all the operations described above. This shall also includes conveyances, delivery, handling, unloading, storing work etc.
- 3.8. The rate shall be for a unit of one sq. meter.

Item No.18 **Finishing wall with weather proof exterior emulsion paint on wall surface (two coats) to give an required shape even shade after thoroughly brushing the surface to remove all dirt, and remains of loose powdered materials.etc complete.**

1.0. Materials

1.1. The water shall conform to M-1, Exterior Emulsion Weather proofing paint shall conform to I.S. 5410-1969.

2.0. Workmanship.

2.1. **Scaffolding :** Where scaffolding is required it shall be erected in such a way that as far as possible no part of scaffolding shall rest against the surface to be distempered. A properly secured and well tied suspended platform(Joola) may be used for distempering. Where ladders are used, pieces of old gunny bags shall be tied at top and bottom to prevent scratches to the walls and floors. For distempering to ceiling, proper stage scaffolding shall be erected where necessary.

2.2. Preparation of surface :

The relevant specifications of item No. 45 shall be followed except that the word white wash color wash shall be substituted with water proofing Exterior Emulsion paint. The surface shall be thoroughly wetted with clean water before Exterior Emulsion water proofing paint is applied.

2.3. **Preparation of paint :** Portland Exterior Emulsion paint shall be prepared by adding paint powder to water and stirring to obtain a thick paste, which shall then be diluted to a brush able consistency. Generally, equal volumes of paint powder and water make a satisfactory paint. In all cases, The manufacture's instructions shall be followed. The paint shall be mixed in such quantities as can used up within an hour of mixing as otherwise the mixture will set and thickness, affecting flowing and finish. The lids of Exterior Emulsion paint drums shall be kept tightly when not in use.

2.4. Application of Paint :

2.4.1. No painting shall be done when the paint is likely to be exposed to a temperature of below 7° C within 48 hours after application.

2.4.2. When weather conditions are such as to cause be carried out in the shadow as far as possible. This helps the proper hardening of the paint film by keeping the surface moist for a longer period.

2.4.3. To maintain the uniform mixture and to prevent segregation, the paint shall be stirred frequently in the bucket.

2.4.4. For undecorated surfaces, the surface shall be treated with minimum two coats of water proof Exterior Emulsion paint. Not less than 24 hours shall be allowed between two coats. Next coat shall not be started until the proceeding coat has become sufficiently hard to resist marking by the brush being used. In hot dry weather, the proceeding coat shall be slightly moistened before applying the subsequent coat.

2.4.5. The finished surface shall be even and uniform in shade, without patches, brush masks, paint drops etc.

2.4.6. The Exterior Emulsion paint shall be applied with a brush with relatively short stiff hog or fiber bristles. The paint shall be brushed in uniform thickness and shall be free from excessively heavy brush marks. The lamps shall be brushed out.

2.4.7. Water proof Exterior Emulsion paint shall not be applied on surface already treated with white wash, color wash, distemper dry or oil bound varnishes, paint etc. it shall not be applied on gypsum, wood and metal surfaces.

2.5. Curing : Painted surfaces shall be sprinkled with water two or three times a day. This shall be done between coats and for at least two days following the final coat. The curing shall be started as soon as the point has hardened so as not be damaged by the sprinkling of water say about 12 hours after the application.

2.6. Protective measurements : The surfaces of doors, windows, floors, articles of furniture etc. and such other parts of the buildings as are not to be distempered shall be protected from being splashed upon. Such surfaces shall be cleaned of emulsion splashes if any.

3.0 Mode of measurements & payment

3.1. Finishing wall with weather proof exterior emulsion paint shall be measured under this item.

3.2. All the work shall be measured net in the decimal system, as executed subject to the following limits unless otherwise stated here in after.

(a) Dimensions shall be measured to the nearest 0.01 meter.

(b) Areas shall be worked out to the nearest 0.01 sq. meter.

3.3. No deductions shall be made for openings not exceeding 0.5 sq. mt. each and no addition shall be made for painting to beddings, mouldings, edges, jambs, soffits, sills etc. of such openings.

3.4. In case of fabricated structural steel and iron work, priming coat of paint shall be included with fabrication. In case of trusses if measured in sq.m. compound girders, stanchions, lattices, grader and similar work, actual area shall be measured in sq. m. and extra shall be paid for painting on bolts heads nuts, washers etc. No addition shall be made to the weight calculated for the purpose of measurements of steel and iron works for paint applied on shop or at site.

3.5. The different surfaces shall be grouped into one general item, areas of uneven surface being converted into equivalent plain area in accordance with the table given as per Annexure – II for payment.

3.6. The rate shall be for a unit of one sq. meter.

Item No.19 Providing and fixing PVC rain water spout of 50mm dia. and 30cm length.

1.0. Materials : P.V.C. type of 50 mm. dia.

2.0. Workmanship

2.1. The P.V.C. pipe of 30 cms. fixed as rain water pipe as directed. The pipe shall be fixed about 1/4 dia. below the floor level so as to make approach of water easy. The inlet of pipe shall be rounded off for easy entry of rain water pipe. The pipe shall be fixed in C.M. 1:3. **3.0. Mode of measurements & payment**

3.1. The rate includes of all labour and materials required for satisfactory completion of this item.

3.2. The rate shall be for a unit of One number.

Item No.20 Providing and laying broken china mosaic flooring for terrace using 12 mm to 20 mm broken pieces of glazed tiles to be laid over cement mortar 1:3 to plain or slope and to be tempered to bring mortar cream out upto surface using white cement including rounding off junctions and extending them upto 15 cm along the wall, clearing with water and oxalic acid etc. as directed.

1.0 GENERAL:

The work shall be carried out as per general technical specification volume and as per National Building Code as amended from time to time.

2.0 MATERIALS:

The water shall conform to M-2. The cement shall conform to M-3

The cement Mortar shall conform to M-22. The sand shall conform to M-6.

The glazed tiles to be of approved quality shall conform to M-55.

3.0 WORKMANSHIP:

3.2 PREPARATION OF SURFACE:

First the existing R.C.C. surface of slab shall be clean thoroughly then the surface where this china mosaic water-proofing work is to be carried out shall be roughened manually. Thereafter first coat of cement slurry at a rate of 2.75 Kg/Sqmt With water-proofing compound shall be admixed and shall be applied on the cleaned surface.

3.2 PREPARATION OF BASE:

The China Mosaic flooring shall be laid on 50 mm thick Cement concrete flooring 1:2:4 (2cement, 2coarse sand : 4 graded stone aggregate 20 mm nominal size) by adding water proofing materials as directed and tiles shall be laid on neat cement slurry as directed.

The work so completed shall be cured for a period of minimum two days either by spreading wet gunny bags or preparing ponds. After completion of the curing the second layer of cement mortar 2:3 with admixing of water proofing materials shall be laid in proportion of 2.75 Kg/Sqmt. Required slope shall be maintained and tempered to bring mortar cream out up to surface using white cement incl. rounding off junctions and extending them upto 25.00 cm. Along with walls & slabs clearing with water and oxalic acid etc. as directed.

On completion of sub base work the china mosaic tiling work shall be carried out. The

china mosaic tiles shall be in form of pieces of required size from glazed tiles be trowelled with white cement slurry.

3.3 FINAL FINISHING:

On completion of the entire work the whole terrace where work has been carried out shall be flooded with sufficient quantity of water for a period of at least two weeks of curing and for final test. All above operations to be done in order and as directed and specified by the Engineer in charge.

4.0 MODE OF MEASUREMENT AND PAYMENT

The rate shall include the cost of all materials and labour involved in all operation described above. No deduction shall be made nor extra payment shall be made for any opening upto 0.2 Sq.Mt in area in the floor, nothing extra shall be paid for laying the floor at different levels in the same room on the court yard.

5.0 Additional Performance Guarantee for china mosaic item:-

The whole slab area in ceiling or wall above which china mosaic water proofing item is to be done shall not be leaked or shall not show any dampness for the period of three years from the date of completion of work.

Minimum three year guarantee bond should be submitted to the Executive Engineer, of the Division, by the contractor and 20% (Ten percent) of total amount for this item shall be with held for three years from bills.

The said with held amount shall be refunded only after satisfactory completion of the three year guarantee period. For any bad performance a notice will be given by concerned Deputy Executive Engineer and contractor has to rectify the defect within 25-days. In case of non-responsive to department's notice, necessary action will be taken by the deptt. at the risk and cost of contractor. A sample performance bond is shown on next page.

6.0 The Rate shall be paid per Sq.Mt. Basis.

Item No.21 Box cutting the road surface to proper slope and camber for making a base for road work including removing the excavated stuff and depositing on the road side slopes as directed upto 50 mts. Lead.

1. Specification No. 162 and 553 of P.W.D. Hand book volume II and the following additional specifications be applicable here.

2. Cutting shall be done in proper grade & camber as per measurements given, Care must be taken the tall slopes are evenly and truly dressed. Cutting shall be done to the exact depth required and shall be as per formation level in proper grade and the camber. If extra depth of cutting is done due to negligence of contractor the same shall be refilled with approved quality of materials duly consolidated to the satisfaction of the Engineer-in-charge (Without extra cost) Box cutting for soling and metalling in required width the depth shall be done

3. The stuff received from the cutting shall be utilized for filling cuts and correcting side slopes of bank with all lead and lift as directed. Useful stuff shall be careful stacked separately as directed.

4. The measurement shall be taken as per cross section measurement of the cutting based on length, breadth, depth measured with tape at every 25 metres interval.

5. The payment shall be made on cmt. basis.

Earth work in cutting in all sorts of soil and soft murrum including conveying and putting the stuff, in spoil bank maintaining minimum distance of five meter between top edge of cutting and top of spoil bank.

1. The land width required for the roadway gutter side slopes and catch water gutters shall be cleared of all trees having a girth of 30 cms. and less loose stones. vegetation bushes stumps and all other objectionable materials. The roots of trees and stumps shall be removed to a depth of 30 cms below the grade information and slopes and excavation filled up with excavated materials and compacted. All the materials cleared will be the property of Government. Useful materials shall be arranged in convenient stacks along the road boundary or as directed as places within 50 mts. lead, and handed over to the department in convenient sections. Unsuitable material shall be burnt or otherwise disposed off by the contractor at his own cost without causing any nuisance, inconvenience or damage to the work, property or people in the neighborhood. If the contractor and royalty etc. If any paid by him without claiming compensations. In all cases, the materials shall be disposed of in a neat manner.

2. After clearing the site, the alignment of the road shall be properly set out true to lines, curves slope, grades and section as shown on the plans or directed by the Engineer in charge. The contractor shall provide all labour and establishing bench marks and giving profiles. The contractor shall be responsible for maintaining the B.Ms profiles alignments and other stakes and marks as long as then are required for the work in the opinion of the Engineer, If the contractor defaults in this respect even after the direction by the Engineer within the specified time, they may be resorted by the Engineer at the levels etc. If there is any disagreement the contractor shall inform of it in writing to the Officer concerned with the specific reference to the sections before starting further work. Once the work has started, no cognizance of any complaint shall be taken Merely not signing of the book shall not be deemed as disagreement.

3. Profiles of the section including the road side gutters to be excavated shall be laid at suitable intervals of 10m to 50 m or other intervals as directed by Engineer to conform to the curved or straight alignment, sections grades and used shall be set up with the toe line marked on each side. The road way section shall first be excavated with vertical side for each lift and the sides slopes for that lift shall be excavated in steps. These steps shall be smoothened to the required slope when the

excavation reaches the road formation. The contractor shall on no account excavate beyond the slopes or below the specified grade unless so directed by the Engineer in writing. If excavation is done below the specified level or out side the section, it shall not be paid for and the contractor shall be required to fill up at his won cost such extra excavation in the road portion, with approved materials of the embankment grade in layers, watered and fully compacted to attain maximum density laid down for the embankment in its relevant item. The Engineer may require measurement ridges and dead man to be left at specified intervals or places and kept intact till order to be removed for the purpose to check measurements. The excavation shall be finished neatly smoothly and evenly to the correct lines, curves, grades. If loose shall be scarified, watered and compacted to the same density as the embankment, The section side slopes and catch water gutter shall be maintained by the contractor at his own cost in such a way that the formation and gutters will be drained by providing for necessary idversions etc. and not darnaged due to obstruction of any drainage, Necessary passages shall be provided for leading away seepage, spring , surface flow or rainwater safely without damaging the work. If any damageoccurse dure to default of the contractor in this respect he shall make good the damage at his own cost, If it is necessary in the execution of the work to interrupt existion surface drainage , irrigation channels , sewers or under drainage, temporary arrangements shall be provide till such time as is necessary. The contractor at his own cost shall make the existing work or work in hand caused as a result of his operations or negligence shall be made good by the contractor at his own cost. Road side gutters shall be excavated to the specified sections and shall be measured along with the main cutting in cubic meters.

4. If slides occur in the cutting they shall be removed as ordered by the Engineer. If finished slopes slide into the roadways before the final acceptance of the work. Such slides shall be removed by the contractor and shall be paid for at the contract rate for the class of excavation involved provided the slides are not due to any negligence of the contractor, The classification of the material in slides shall conform to its conditions at the time of removal and payment made accordingly regardless of its prior condition. Care shall be taken to see that excavation is arranges in a safe way so that there will be no risk to the workmen by lider, falling materials. boulders and collapsing sides etc.

5. If there is traffic nearby or if there are towns and villages in the neighbrohood. barricades and or traffic, signals shall be provided day and night for the duration of the work in such a way as to revent accidents. Warning signals shall be dispayed at 7mt. from the danger poing on both sides giving sufficient warning. If necessary, signalers shall be stationed at each end to regulate traffic where it is heavy. Measures shall be taken to see that the excavation does not affect or damage adjoining structures or properly, If there is damage to property, injury to workers,

the members of the public, animals etc., due to the negligence of the contractor, he will be responsible and liable to all the consequences including compensation.

6. All the excavated materials shall be property of Govt. When the useful excavated material is to be used in embankment within a lead of 200 metre an all lift, it shall be directly deposited at the required location in specified layers. No handing or conveyance charges shall be paid if the material is temporarily deposited elsewhere and the drainage in any way. If no Govt. land is available but the excavated useful stuff is to be stacked temporarily before use under the same agreement, the contractor shall make his own arrangements for the stacking of this material not required for use on embankment or unsuitable materials may be used on his own to uniformly widen embankment to flatten slopes and to fill low places in the road land. if so permitted by the Engineer. Material not required for any use whatsoever maybe disposed of by the contractor at his own cost in manner approved by the Engineer. The excavated material shall not be deposited within 3 m. from the top edge if slope or toe of the bank. The lead shall be measured from the junction point of cutting and embankment up to 200 mt. on either side.

7. If the contractor does not wish to utilise the quantity of cutting within the specitied lead for any reason, then he may do the embankment work with the earth from other sources (except borrow pits in the length of the road where cutting stuff is to e utilized) but in that case the full or part quantity on acceptable quality stuff for which payment is made or to be made will be duducted from the net quantity of the earth work in the embankment arrived at, within the chainage measured as above.

8. The contract rate shall be a unit of one cubic metre for the start mentioned in the wording of the item of excavation acceptably completed. limited to the dimensions shown on the plans or as directed by the Engineer. Excavation shall be measured in its original positions by taking cross sections before the work starts and after it is entirely completed. The quality shall be worked by the average end area method. When the classification of the strata changes, the contractor shall bring this to notice of the Engineer. who will then verify and if necessary take levels for the changed strata for purpose of measurement.

- Item No. 22** Providing and interlocking CC Paving block in every square meters as per selected size and shape and 80 M-200 without pigmentation the blocks will be rubber moulded of uniform staight edges. even colour and without any damages the paving blocks will be laid in pattern specification packed, in different colour in half thickness will filled in a clean manner finished with edge detailing as specified paver blocks will be laid dry on a layer of sand of finished 50MM thick with wooden mallet or rubber hammer the rates are excl. edge dataling rubble soling bed as required.

1503. RECTANGULAR CONCRETE BLOCK PAVEMENT

1503.1. Scope

1503.1.1. The rectangular concrete block pavement (CBP) shall consist of a surface layer of appropriate-sized concrete block paved on a thin, compacted bedding sand layer of specified grading, which is spread over a properly profiled base course and is bounded by edge restraints. The joints shall be filled by fine sand of specified grading. The work shall include furnishing of all plant and equipment, material, and labour for manufacturing and laying concrete blocks in position and performing all other operations in connection with the work as approved by the Engineer. Only mechanized or semi-mechanized methods of manufacturing cement concrete blocks shall be acceptable.

1503.1.2. The design details, viz., dimensions of blocks, grade of cement concrete, joint details, patterns of laying and end restraints, etc. shall be as shown on the drawings. The thickness of block shall be not less than 150 mm and grade of concrete shall not be less than M30.

1503.2. Materials

1503.2.1. Source of materials : Clause 1501.2.1 of these Specifications shall be followed.

1503.2.2. Cement : Cement shall conform to Clause 1501.2.2. of these Specifications.

1503.2.3. Aggregates : The aggregates shall conform to Clause 1501.2.4.

1503.2.3.1. Course aggregates : The course aggregates for manufacture of blocks shall conform to Clauses 1501.2.4.1 and 1501.2.4.1.1 of these Specifications.

1503.2.3.2. Fine aggregates : The fine aggregates far manufacture of blocks shall conform to Clause 1501.2.4.2.

1503.2.3.3. Admixtures : Admixtures, if used for attaining required workability of concrete mix shall conform to IS:9103.

1503.2.4. Water: Water shall conform to Clause 1501.2.6 and Table 1500.2.

1503.2.5. Aggregate gradation : The aggregate gradation shall conform to Table 1500.1 of these Specifications.

1503.2.6. Joint filling sand : The joint filling sand shall be fine sand conforming to grading as per Table 1500.5.

1503.2.7. Bedding sand : It shall conform to grading specified in Table 1500.5.

TABLE 1500.5 : RECOMMENDED GRADING FOR BEDDING AND JOINT FILLING SAND

IS Sieve Size (mm)	Per cent Passing	
	Bedding Sand	Joint Filling Sand
10.00	100	100
4.75	90-100	95-100
2.36	75-100	95-100
1.18	55-90	90-100
0.60	35-59	80-100
0.30	8-30	15-50
0.15	0-10	0-15
0.075	0-3	0-5

1503.2.8. Storage of materials : This shall conform to Clause 802 of these Specifications.

1503.2.8.1. Storage of cement: It shall conform to Clause 802.2.2 of these Specifications.

1503.3. Size of Paving Blocks

The size of paving blocks and restraint blocks shall be 450 mm x 300mm x 150 mm and 300 mm x 300 mm x 150 mm (length x width x thickness) respectively. If any other size is adopted as per drawings or as per directions of the Engineer, the width to length ratio shall not be more than 1:2.

1503.4. Mix Design

1503.4.1. The concrete for block pavements shall have design mix of M 30 grade. The laboratory trials on the mix design shall be made by the Contractor and the mix design submitted to the Engineer for approval 30 days prior to the paving of trial length. The mix design shall be tested for characteristic strength in compression by 150 mm x 150 mm x 150 mm cubes cured for 28 days. The design of concrete mix shall be as per guide lines given in 15:10262. The aggregates cement ratio shall normally be in the range of 3:1 to 6:1.

1503.4.1.1. The quantities of coarse or fine aggregates in gradation of the aggregates may be varied to achieve the minimum characteristic strength if necessary.

1503.4.2. Cement content: The cement content shall not be less than 310 kg/cu.m. nor shall it be more than 425 kg per cu.m. However, if the Contractor is not able to achieve the specified characteristic strength with 310 kg/cu.m. he shall not be paid any extra cost for using more cement.

1503.43. Concrete strength

The characteristic compressive strength of concrete shall not be less than 30 MPa.

1503.5. Workability

The total water content shall be between 5-7 per cent by weight of total dry materials (cement + sand + coarse aggregates). When blocks are manufactured using block making machine, the concrete shall be "Zero slump concrete". When concrete blocks are manufactured using vibrating table along with surface vibrator, the concrete slump may vary from 10-15 mm

1503.6. Manufacture and Curing of Blocks

1503.6.1. The blocks shall preferably be manufactured with the help of block manufacturing machine. If the same is not available, the blocks shall be manufactured with the help of semi-mechanised means, i.e., vibrating table and a surface vibrator. Thorough vibration will be imparted for proper compaction. Tough plastic moulds or steel moulds shall be used for the purpose. The sides and bottom of moulds shall be oiled with shuttering oil prior to filling of mould. The moulds shall be removed at appropriate time varying from 12-24 hours of casting of blocks and then the blocks shall be cured in water tank for 28 days. The moulds shall be washed with water after each use and oiled before each re-use.

1503.6.2. Buffer : Extra number of blocks to the extent of 5 per cent shall be manufactured at the time of initially casting the blocks and shall be properly stored for replacement as and when needed.

1503.7. Subgrade

The subgrade shall conform to Clause 1501.5.1. of these Specifications and shall have camber of 3 per cent. When the soaked CBR of subgrade soil is less than 4 per cent, it shall be improved by cement/lime/mechanical stabilization as appropriate or 300 mm thick existing layer shall be replaced with soil of minimum CBR of 4 per cent, whichever is cost effective.

1503.8. Sub-base

The sub-base shall be 100 mm thick granular sub-base (GSB) conforming to Clause 401 of these Specifications or 100 mm thick WBM using Gr. 1 metal conforming to Clause 405 of these Specifications. In case the subgrade soil is clayey, the sub-base shall be extended over the full formation width for proper drainage.

1503.9. Shoulders

Earthen Shoulders of 1.5 m width on either side shall be prepared with camber of 4 per cent.

1503.10. Base Course

The base course shall be 75 mm thick WBM Gr. 2 or Gr. 3 conforming to Clause 405 of these Specifications. The base course shall be extended by at least 150 mm beyond edge blocks.

1503.11. Bedding Sand

Bedding sand conforming to grading given in Table 1500.6 shall be uniformly laid over the base course to a compacted thickness of 25 mm to 30 mm. It shall be profiled truly to the camber or unidirectional fall on superelevations, with the help of a screed. The screed can be guided to proper level by tensioned string lines set above the base course or by thickness blocks. The bedding sand shall have about 6 per cent moisture to facilitate its spreading and compaction. Screeding shall not be processed beyond about 1 metre ahead of

the planned end of the block paving for the day. Sand shall be compacted with a hand rammer or plate compactor and level shall be re-adjusted, if needed, by using the screed.

1503.12. Laying of Blocks

The pattern for paving of blocks shall be either herringbone or stretcher as shown in the sketch. In case sketcher pattern is used, staggered joints shall be ensured. The joint between any two stretcher shall be staggered by about half the length of the stretcher. The edge restraining blocks shall be made to stand vertically so that their outer/inner edge matches with the profile of block pavement. Control over alignment, laying pattern and joint width can be assisted by the use of chalked string lines set at about 5 m intervals.

1503.12.1 Joints : The width of joint shall be between 2 mm to 4 mm. On curves non-uniform joint width may have to be resorted to. Cutting paving units for filling the paving gaps occurring against edge restraints, etc. shall be deferred until sufficient work has progressed to allow reasonably continuous operation. When space does not permit the use of cut piece of blocks, the use of premixed or dry packed concrete is recommended. After a section has been paved, compaction with a vibratory plate compactor shall be done in the following sequence of operations.

- (i) The blocks shall be vibrated with three passes of a standard vibrating plate compactor of weight 0.9 kN, plate area not less than 0.3 square metres and capable of applying centrifugal force of 15 kN.
- (ii) A thin layer of joint filling sand as per Clause 1503.2.6 shall be spread on the top of paved blocks and swept into joints using suitable brooms.
- (iii) The sand shall be vibrated into the joints by moving the vibrating compactor and plate more sand shall be applied till the joints are well packed.
- (iv) Excess sand from the top of block pavement shall be swept clean.

1503.13. Acceptance Criteria

Minimum six cubes per day's work (3 each for 7-day and 28-day strength) shall be cast, cured and tested as per IS:516.

The compressive strength shall not be less than f_{ck} the design characteristic compressive strength.

1503.14. Trial Length

The Contractor shall lay a trial length of 30 m before proceeding with the main work. The same shall be got approved by the Engineer before proceeding with the regular pavement. The length shall be rectified/re-laid if, found deficient in Specifications. The procedure demonstrated in the laying of trial length shall be followed while laying the main pavement.

1503.15. Opening to Traffic

The pavement may be opened to traffic soon after completion of a stretch.

1503.16. Tolerance

1503.16.1. Level tolerance : The tolerance in surface levels shall be not more than ± 15 mm.

1503.16.2. Surface regularity : The maximum allowable difference between the road surface and underside of a 3 m straight edge when placed parallel or at right angles to the centre-line the road at points decided by the Engineer shall be as under:

Longitudinal profile not more than	12 mm
Cross profile not more than	10 mm

1503.17. Measurements for Payment

The measurement shall be in square metres measured from outer edge of restraint block to outer edge of restraint block across the whole width of pavement.

1503.18. Rate

The contract unit rate shall include cost of manufacture of blocks, including materials, cost of curing, stacking, transportation to site, laying of block, including supplying and applying bedding sand and joints filling sand including full compensation for labour, tools, plant, equipment, testing and all incidentals to the work complete as per Specifications including all royalties, taxes storage rents where ever necessary and all leads and lifts.

1504. INTERLOCKING CONCRETE BLOCK PAVEMENT

1504.1. Scope

Interlocking Concrete Block Pavement (ICBP) shall consist of a surface layer of appropriate sized concrete paving blocks paved and compacted over a thin bedding sand layer of specified grading, which is spread over a properly constructed and profiled base course and is bounded by properly installed edge restraints. The joints shall be filled by fine sand of specified grading. The work shall include supplying laying and paving of blocks including all materials, labour and equipment and performing all operations in connection with the laying of ICBP as per these Specifications.

1504.2. Materials

1504.2.1. The Concrete Paving Block shall conform to the relevant IS standard. **1504.2.2. Bedding sand :**

Bedding sand shall conform to the grading given in Table

1500.6.

1504.2.3. Joint filling sand : Joint filling sand shall conform to grading given in Table 1500.6.

TABLE 1500.6 : GRADINGS FOR BEDDING AND JOINT FILLING SAND

IS Sieve Size (mm)	Per cent Passing	
	For Bedding Sand	For Joint Filling Sand
10.00	100	100
4.75	90-100	90-100
2.36	60-95	75-100
1.18	15-34	55-90
0.60	25-60	35-59
0.30	5-20	8-30
0.15	0-10	0-10
0.075	0-5	0-5

1504.3. Buffer

Buffer of specified quantity of paving blocks (of the same shape, size and thickness) required for normal maintenance of paved area as specified by the Engineer, shall be supplied and stored for replacement as and when needed. Normally this will be 5 per cent of the blocks used in the paved area.

1504.4. Block Thickness

For rural roads catering to heavy vehicles, the minimum thickness of paving blocks shall be 60 mm for traffic up to 100 vehicles per day, and 80 mm for projected traffic from 100 to 250 vehicles per day.

1504.5. Dimensions and Tolerances

The dimensions and tolerances of paving blocks shall conform to the Specifications given in Table 1500.7. Aspect ratio is the ratio of length to thickness of blocks. Chamfer is the bevelled edge, provided on the top surface of a block. Plan area is the horizontal area bounded by the vertical faces. Wearing surface area is the horizontal area bounded by the vertical faces, minus the area reduced due to the presence of chamfer.

TABLE 1500.7 : DIMENSIONS AND TOLERANCES FOR PAVING BLOCKS

S. No.	Dimension	Recommended Values	Tolerance Limit
(1)	Width W	To be specified by Manufacturer	± 2 mm
(2)	Length L	To be specified by Manufacturer	± 2 mm
(3)	Thickness T	60 to 80 mm	± 3 mm
(4)	Aspect Ratio L/T	Maximum : 4.0	± 0.2
(5)	Chamfer (Arris)	Maximum : 5 mm Maximum : 7 mm	± 1 mm
(6)	Plan Area	Maximum : 0.03 m^2	$+0.001 \text{ m}^2$
(7)	Wearing Face Area	Minimum 75% of Plan Area	-1%
(8)	Squareness	Nil	± 2 mm

1504.6. Compressive Strength

1504.6.1. The average 28 days compressive strength of 8 blocks shall be 30 MPa and strength of individual block shall not be less than 26 MPa.

1504.6.2. The 28 days compressive strength of paving blocks tested as per relevant IS specification shall be determined as explained hereinafter.

1504.6.2.1. Compression testing machine of adequate capacity shall be used for testing of blocks. The steel bearing plates shall have a minimum thickness of 25 mm. The surface area of the bearing side of the plate should be such that no edge of the bearing plate is less than 10 mm from the outer edge of the paving block being tested.

1504.6.2.2. In case the testing surface of the paving block departs from a plain surface by more than 0.05 mm, capping using suitable materials shall be adopted for testing as per IS:516.

1504.6.2.3. The blocks shall be stored for 24 ± 4 hours in water maintained at a temperature of $(20 \pm 5)^{\circ}\text{C}$ before testing. The dimensions and plan areas of the block shall be determined. The bearing plates of the testing machine shall be wiped clean. The specimen shall be clamped between the plates in such a way that the axes of the specimen are vertically aligned with those of the bearing plates.

1504.6.2.4. The load shall be applied without shock and increased continuously at a rate of 15 ± 3 N/mm²/minute until no greater load can be sustained by the specimen or delamination occurs. The maximum load applied to the specimen shall be noted.

1504.6.2.5. The apparent compressive strength of individual block shall be calculated by dividing the maximum load (N) by the plan area (mm²). The corrected compressive strength shall be calculated by multiplying the apparent compressive strength by the appropriate correction factor from Table 1500.8. The strength shall be expressed to the nearest 0.1 N/mm².

**TABLE 1500.8 : CORRECTION FACTORS FOR THICKNESS AND CHAMFER OF PAVING BLOCK
FOR CALCULATION OF COMPRESSIVE STRENGTH**

Paving Block Thickness (mm)	Correction Factor for	
	Plain Block	Chamfered Block
60	1.00	1.06
80	1.12	1.18

1504.6.2.6. Water Absorption: The water absorption being the average of five blocks shall be not more than 6 per cent by mass.

1504.7. Edge Blocks

The edge blocks shall have equivalent cube compressive strength not less than 30 MPa. The road kerbs provided on the edges of the road also serve the purpose of edge blocks. In case the end kerbs are not provided, 300 mm x 300 mm x 150 mm of M30 grade concrete edge blocks or other suitable size as per drawings or direction of the Engineer shall be provided.

1504.7.2. Subgrade

The Subgrade shall conform to Clause 1501.5.1 of these Specifications. The soaked CBR of subgrade soil shall not be less than 4 per cent.

1504.8. Sub-base

The sub-base shall be 100 mm thick granular layer conforming to Clause 401 or 100 mm thick WBM Gr.I conforming to Clause 405 of these Specifications. In case the subgrade soil is clayey, the sub-base shall be extended over the full formation width for proper drainage.

1504.9. Base Course

A minimum 100 mm thick layer of granular/stabilized base course shall be provided. The base course layer shall be extended at least 300 mm beyond the edge restraints. The material shall conform to Clause 402 of these Specifications.


1504.10. Bedding Sand

Bedding sand conforming to Table 1500.6 shall be uniformly laid to a compacted thickness of 25 mm for 60 mm thick blocks and 30 mm for 80 mm thick blocks. Bedding sand shall be unloaded in small piles regularly placed over the base course and shall preferably have a moisture content of about 6 per cent which will facilitate its spreading and compaction. Bedding sand shall be screeded in a uniform layer over the base course. The


screed can be guided to level by tensioned string lines set above the base course. At the time of screeding, the thickness of sand must allow for the amount by which it will be subsequently compacted which is normally about 25 per cent more than the compacted thickness. Screeding shall not proceed beyond about 1 m ahead of the planned end of block paving for the day. Sand shall preferably be compacted with a manual, fabricated plate compactor and the level shall **be readjusted** using the screed. The surface profile of the screeded bedding **sand** shall **match that** required for the completed pavement.

1504.11. Paving Pattern

The pattern in which blocks are to be paved shall be decided in advance from the two choices or their derived forms available. These are the herringbone and stretcher patterns, as shown in Fig. 1500.3.

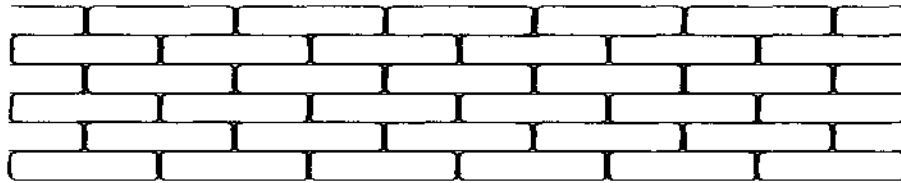

(a) STRETCHER OR RUNNING

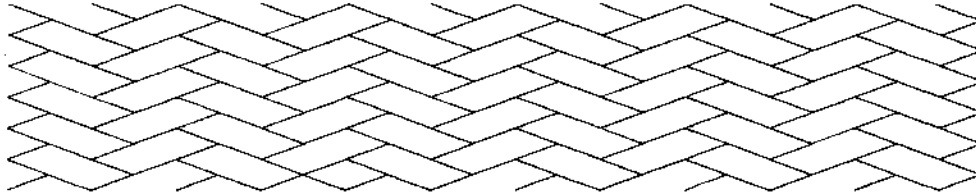

(b) HERRINGBONE

Fig. 1500.3. Basic Bonds

1504.11.1. By and large, these patterns are the same as adopted for brick paving. All shapes of blocks are not amenable to the above paving patterns. For paving in trafficked areas, herringbone pattern shall be adopted for ensuring better performance. Paving shall commence and progress from one starting line only. Wherever possible, paving shall commence adjacent to or against edge restraint.

1504.12. Paving and Compaction of Blocks

Blocks shall be placed at the correct angle to the start line to achieve the final orientation of the laying pattern. For curved or unfavourably oriented edge restraints, a string line shall be established to permit fast, easy laying such that it is not required to force a block between the blocks already paved. Control over alignment, laying pattern and joint width can be assisted by the use of chalked string lines set at about 5 m intervals. Nominal joint width of 2 to 4 mm shall be maintained by holding the paving unit lightly against the face of the adjacent block and allowing it to slide into position. Cutting paving units for filling the paving gaps occurring against edge restraints etc. shall be deferred until sufficient work has progressed to allow reasonably continuous operation. When space does not permit the use of cut pieces of blocks, premixed or dry packed concrete shall be used. After a section has been paved, compaction shall be effected by using vibrating plate compactors in the following sequence of operations:

- (i) Vibrate the blocks with 3 passes of the plate vibrator of adequate capacity.

- (ii) Spread a thin layer of fine joint filling sand on top of the paved blocks and sweep it into the joints, using suitable brooms.
- (iii) Vibrate the sand into the joints by making 3 passes of the compactor.
- (iv) Sweep off the excess sand from top of blocks.

As a guide to the characteristics of typical vibrating plate compactors, standard compactors have a weight of 90 kg, a plate area of 0.3 m² and apply a centrifugal force of 1500 kg. Heavy duty compactors weigh between 300 to 600 kg, have a plate area of about 0.5 to 0.6 m² and apply a centrifugal force in the range of 2000-3000 kg. Use of heavy duty compactors is desirable for trafficked pavements.

1504.12.1. Trial length : The contractor shall lay a trial length of 30 m and get it inspected and approved by the Engineer before proceeding with the regular paving work. The trial length shall be rectified/relaid if found deficient in any respect. The procedure demonstrated in the laying of trial length shall be followed while executing the main construction work.

1504.13. Opening to Traffic

The pavement can be opened to traffic as soon as the construction work is completed. **1504.14.1.**

Transverse profile : When measured by a camber template, the transverse profile shall not deviate by more than 10 mm from the design profile.

1504.14.2. Longitudinal profile : When measured by a 3 m straight edge, the longitudinal profile shall not deviate by more than 12 mm from the design profile.

1504.15. Acceptance Criteria

From each lot of 500 blocks, 5 blocks shall be selected at random for water absorption and compressive strength tests. In case the number of blocks in the lot is less than 500, a minimum 1 per cent of the blocks delivered to site shall be tested for water absorption and strength. The blocks shall be first tested for water absorption and these shall meet the requirement of Clause 1504.5.2.6 of these Specifications. The same five blocks (or minimum 1 per cent) shall be tested for strength and shall conform to the strength as per Clause 1504.5.1 of these Specifications.

The paved surface shall meet the tolerances for lines, levels, and grades etc. as given in Section 1800 of these Specifications.

1504.16. Measurements for Payment

The measurement of the paved area shall be in square metres measured from the inner edge of edge restraints on one side of the pavement to the inner edge of the edge restraints on the transverse side of the pavement. The measurement of the edge restraints shall be in number of units or in cubic metres

1504.17. Rate

The contract unit rate shall include the cost of blocks, cost of stacking, transportation to site and paving including supply and application of bedding sand and joint filling sand. The rate shall include full compensation for labour, tools, plant, equipment, testing and all incidentals to the work, including all royalties, taxes, storage rents wherever necessary, and all leads and lifts.

Item No.23 Providing and laying C.C. 1:2:4 (1 cement, 2 coarse sand , 4 graded stone agg. 20mm Nominal size) and curring comp. excluding cost of forwork in. (A) foundation and plinth.

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.3 R.C.C. WORK M-20

Item No.24 Pqint wiring forFAN with 2-1.5 sq.mm & earthwire of 1.5 sq.mm (Green) both are of ISI marked 1.1 KV Grade FRLS PVC insulated multistrand copper wires, in following type of pipe to be erected concealed in flushedon on wall/ceilling complete with 6A Modular type awitch and hum free EME four or more step type electronic fan regulator with separately mounted and accessories with earth continuity of following type, erected on PVC / Metallic box, single mounting base frame covered with textured/metalic front plate modules erected on / in wall / ceilling as per pipe erected, with necessary ceiling rose /H.D.Connector as directed.(a) with medium class Rigid PVC pipe and accessories Cat-III

SPECIFICATION FOR INTERNAL ELECTRICAL WORK

CONTENTS

Section 1. Technical Specifications – General

Section 2. Technical Specifications- Conduit Wiring

Section 3. Technical Specifications – CTS wiring

Section 4. Technical Specifications- Cable laying

Section 5. Technical Specifications- Electrical fittings, fixtures and fans.

Section 6. Technical Specifications- Circuit breakers, panel boards & distribution boards Section 7. Technical Specifications- Earthing

Section 8. Technical Specifications- Painting

Section 9. Testing

Section 10. Accepted makes of materials.

SECTION – 1

TECHNICAL SPECIFICATIONS – GENERAL

1.1 These specifications indicate the General requirements for internal electrical work including wiring system, panel boards, cable laying, earthing protection and other related works.

1.2 These specifications are drawn to indicate essential requirements and precautions to be taken regarding internal electrical installation for ensuring efficient, safe, economical and practicable use of electrical materials and equipment, in conformity with statutory regulations and easy maintainability of the installations.

1.3 Complete work shall be carried out conforming to the provisions of Indian Electricity Act and relevant Indian standard Specifications (ISS). Wherever these regulations are supplemented by the State Electricity Dept., Electricity Undertakings/Boards, Factory inspector and the Safety Engineering Dept. of AI, the installation shall also comply with

these requirements. Wherever the specifications given in this booklet differs from those of the statutory regulations, these specifications shall be followed.

1.4 On completion of works, wiring diagram for complete installation shall be prepared by the contractor and 4 copies of the same shall be supplied to AI.

1.5 All wiring diagrams shall indicate clearly in plan the main switch board, distribution fuse board, the runs of various mains and sub mains and the position of points with their classifications and controls. All circuits shall be indicated and numbered in wiring diagram and all points shall be given the same number as the circuit to switch they are electrically connected. Distributions boards shall also be marked to indicate the circuit number controlled by them.

1.6 All materials issued by AI such as fans, equipments, cement etc. will be issued at the AI Stores and transportation to site will be contractor's responsibility. No separate payment will be made towards the transportation.

1.7 The Contractor shall prepare fabrication and detailed working drawings and obtain approval of Electrical Inspector, TAC and other local authorities before submitting them for approval of AI. All works shall be carried out only on approval of drawings. Approval of drawings, does not relieve the contractor of his responsibilities to meet the intents of specifications. Wherever service connections are to be obtained from the local supply company, the contractor shall process the application and obtain the power supply. All fees payable to the supply company and Electrical **Inspector** for such service connections will be paid by AI / reimbursed to the contractor as directed by EIC.

1.8 Location of panel boards, distribution boards, switch boards, light fittings, cable routes, conduit/ CTS wiring routes, earth pits etc. shall be marked at site and approval of Engineer- in-charge obtained before proceeding with the installation work.

1.9 Rated Power, Voltage and frequency of supply of current consuming devices and materials used in installation shall be suitable for the power and frequency of the supply to which these are to be connected.

1.10 Accepted make of materials:

1.10.1 In section 10 Accepted makes of various materials are indicated. Materials of these brand names only shall be utilised for this work.

1.11 STANDARDS:

For all materials and equipments Indian standard Specifications shall apply. In the absence of ISS, relevant British Standards shall be applicable. All Specifications, publications mean the latest edition. A list of IS Specifications applicable for internal electrical works is given at Section 15.

SECTION – 2

TECHNICAL SPECIFICATIONS FOR CONDUIT WIRING

2.1 For all industrial premises, conduit system of wiring shall be provided. In case of commercial and domestic premise, conduit system of wiring shall be provided wherever specified.

2.2 Point Wiring:

2.2.1 Point wiring shall include all works necessary for complete wiring of a switch circuit of any length from the tapping point on the distribution circuit to the following through the switch.

- Ceiling rose or connector (in the case of ceiling/exhaust fan point).
- Ceiling rose (in the case of pendant except stiff pendant point).
- Back plate (in the case of stiff pendants and fittings with down rods)

- d) Socket and Outlets (in the case of socket outlets points)
- e) Lamp Holder (in the case of wall brackets, batten points, bulk head and similar fittings).
- f) Call Bell/ Buzzer (in this case the works Via the switch shall be red as “ Via ceiling rose, socket outlet or bell push where no ceiling rose/socket outlets is provided”).

2.2.2 The following shall be deemed to be included in the point wiring.

- a) Switch.
- b) Ceiling rose or connector as required
- c) Any special and suitable M. S. box for neatly housing the connector and covering the fan hook in case of fan point.
- d) Bushed conduit or porcelain where cable pas through walls, floors etc.
- e) Earth wire from the distribution boards to all current carrying apparatus through switch boards, M. S. Boxes etc.
- f) All metal blocks, boards, covers and M. S. Boxes, sunk or surface mounted including those required for mounting fan regulators but excluding those for fixing the distribution switch boards.
- g) All fixing accessories such as clips, nails, screws, phil plug, rawl plug etc. as required.
- h) Connection to ceiling rose, connector socket outlets, Lamp holders, switch, fan regulator etc.
- i) Looping in the same switch board and inter connections between points on the same circuit.

2.2.3 All points in the distribution system shall be measured under point wiring irrespective of length of circuit from the distribution board.

2.2.4 In case of point with more than one light point controlled by the same switch, the complete items shall be considered as separate point and the rate shall be quoted accordingly.

2.2.5 A light point controlled by 2 Nos. of control switches shall be measured as one point from the switch to either side of the appliance viz. total of two points.

2.2.6 In case of call bell/buzzer point where a single call bell/buzzer is controlled from more than one place with a ceiling rose and bell push, ceiling rose where socket outlets is not provided, the length of point shall be from the call bell/buzzer to the closest bell push. The additional bell-push and wiring on the same point shall be separately quoted for.

2.2.7 Sub-Main wiring

2.2.8 The sub-main wiring shall mean the length of wiring from main building panel board/distribution switch board to another main/distribution switch board, measured along the run of wiring. Such wiring shall be measured on linear basis.

2.3 System of Wiring:

2.3.1 The wiring shall be carried out as per the system specified in the tender Schedule. Power wiring shall be kept separate and distinct from lighting and fan wiring. All conductors shall run as far as possible along the walls and ceiling so as to be easily accessible and capable of being thoroughly inspected. In all types of wiring due consideration shall be given for neatness, good appearance and safety.

2.3.2 The balancing of circuits in 3 wires on poly phase installation shall be arranged to the satisfaction of Engineer-in-charge. In large/important rooms light fans and socket outlet points shall be distributed over more than one circuit as directed by the Engineer-in-charge.

2.4 Flexible Cable:

2.4.1 Conductor of flexible cable shall be of copper. The minimum permissible size of conductor for flexible cable shall be 16/0.2 mm \square -mm². Unless the flexible cables and

CUMMUNITY HALL

conduits are protected by armour PVC sheaths, these shall not be used in workshops and other places where they are liable to mechanical damage.

2.4.1 Three core flexible cables shall be used for connecting single phase appliance.

2.5 Rating of lamps, fans etc. :

2.5.1 For the purposes of connected load calculations, incandescent installations for residential and non residential building shall be rated at 100 W

2.5.2 Table fans shall be rated at 50/60W. Exhaust fans shall be rated according to their capacity.

2.5.3 5 Amp socket outlet point and 15 Amp socket outlet point shall be rated at 100W and 1000W respectively, unless the actual values of loads are known or specified.

2.6 Joints and loop back :

2.6.1.1 Unless otherwise specified, the wiring shall be done in the 'Looping system'. Phase or light conductor shall be looped at the circuit box and neutral connected shall be looped from the light, fan or socket outlet. In non residential buildings neutral conductor and earth continuity wire shall be brought to each circuit board, circuit switch in rooms and halls. These shall be terminated inside the switch board and shall be of adequate sizes to accommodate minimum of 1 No. 5 Amps socket outlet and control switch in future.

2.6.2 Wherever wires are to be connected together, mechanical connector of adequate ratings shall be made use of. Under no circumstances twisted joints shall be allowed.

2.7 Control at point of entry of supply.

2.7.1 There shall be a linked main switch gear with fuse on each light conductor of the supply mains at the points of entry. The wiring throughout the installation shall be such that there is no break in the neutral wire except in the form of linked switch gear.

2.7.2 The neutral shall be distinctly marked.

2.7.3 The main switch gear shall be situated as near as practical to the termination of service line and shall be easily accessible without the use of any external aid.

2.7.4 On the main switch gear, where the conductors include earth conductor of a 2 wire system or on earthed neutral conductor of a multi wire system or a conductor which is to be connected thereto, the permanent indication shall be provided to identify the earthed neutral conductor (Rule 32 (i) of Indian Electricity Rules 1956 refers).

2.8 Switch Boards:

2.8.1 Metal clad switch gear shall be mounted on wall, columns etc. by suitable mechanical means so as to ensure firm mechanical supports.

2.8.2 Hinged type boards shall consist of a box made of sheet metal clad, switch gear, distribution boards etc.

2.8.3 Hinged metal boards shall consist of a box made of sheet metal of 6 SWG gauge thick and shall be provided with hinged cover to enable board to be swung open for the examination of the wiring at the back. The joint shall be substantially welded.

2.8.4 All wires passing through metal boards shall be bushed.

2.8.5 No apparatus shall project beyond any edge of the panel. No fuse body shall be mounted within 2.5 cms of any edge of the panel.

2.8.6 Fixed type metal boards shall be provided for large switch boards where number of switch gears and/or higher capacity metal clad switch gears are to be mounted.

2.8.7 Fixed type metal boards shall consist of an angle or channel iron frame fixed on the wall or on the floor and supported on the wall at the top. There shall be a clear distance of one meter in front of the switch board. The working distance of one meter behind the switch board is preferable.

2.8.8 The detailed design and drawings for metal boards and angle iron frame work including the disposition of the various mounting, which shall be systematically and neatly arranged for arriving at the overall dimensions shall be prepared and submitted before hand for approval of the Engineer-in-charge.

2.8.9 In case of convenience power outlets in industrial premises of 15/30 Amps the boxes shall be made out of sheet metal 16 gauge and of size 300 x 250 mm. The socket outlet shall be of Reyrolle type two pin and earth. A 30 Amps switch, double pole metal clad shall be provided for the socket outlet. For the socket outlets, protective cover with connecting chain shall also be provided.

2.8.10 In case of commercial and residential buildings or wherever specifically indicated power outlets with flush type 15 Amps socket outlet and 15 Amps control switch shall be provided.

2.9 Marking of Apparatus:

2.9.1 When a board is connected to voltage higher than 250 volts, all the terminals or leads of the apparatus mounted on it shall be marked in the following colours to indicate the different poles or phase to which apparatus or its different terminals may have been connected.

Alternating Current Direct Current

Three phases-Red, Blue, yellow, Three Wire System 2 outer wires Neutral - Black Neutral - Black

2.9.2 Where a board has more than one switch gear, each such switch gear shall be marked to indicate which section of the installation it controls. The main switchgear shall also be suitably marked. Where there is more than one switch board in the building, each such switch board shall be marked to indicate which section of the installation and building it controls.

2.9.3 All marking required under this rule shall be clear and permanent.

2.9.4 In the cable boxes for all the switchgears, the size and number of cables connected to it shall be suitably marked.

2.9.5 All distribution boards shall be marked 'lighting' or 'power' & essential lighting / power as the case may be and also marked with the pressure and number of phases of the supply. Each distribution board shall be provided with a circuit list giving details of each circuit which it controls and the current rating of the circuit and size of the fuse element.

2.9.6 Capacity of Circuits:

2.9.7 Lights and fans may be wired on a common circuit. Such circuit shall not have more than a total of 8 points of light, fan and socket outlets or a load of 800 watts, whichever is less.

2.9.8 The power circuits shall be designed with one outlet per circuit unless otherwise specified, The circuits shall be designed based on the loading of the circuit. Where not specified, the load shall be taken as 2000 watts per circuit.

2.10 Type and size of Conduit:

2.10.1 Conduit pipe used in wiring system shall be of 16 gauge for sizes upto 32 mm and 14 gauge for sizes above 32 mm. Conduit pipes shall be solid drawn or formed by electric resistance welding (ERW) finished with galvanized or stove enameled surface. All conduit accessories shall be of thread type. Pin grip type or clamp grip type accessories shall not be used. The maximum number of PVC insulated 250 volts grade aluminium conductor cable that can be drawn in one conduit of

various sizes is given in Table I and the number of cables per conduit shall not exceed this. Steel conduit of size less than 19 mm in diameter shall not be used.

2.11 Bunching of cables:

2.11.1 Cables carrying direct current may be bunched whatever their polarity, but cable carrying alternating current, if installed in metal conduit shall always be bunched so that the outgoing and return cables are drawn into the same conduit.

2.12 Conduit Joints:

2.12.1 Conduit pipes shall be jointed by means of screwed – screwed accessories only. In long distance straight run of conduit, inspection type completes at reasonable intervals shall be provided. In the latter case the bare threaded portion shall be treated with anti-corrosive preservative. Threads on conduit pipe in all cases shall be between 13 mm to 19 mm long sufficient to accommodate pipes to full threaded portion of couplers or accessories. Cut ends of conduit pipes shall have no sharp edges nor any burrs left to avoid damage to the insulation or conductors while pulling them through such pipes. After laying of the conduit the bare threaded portion shall be treated with two coats anti-corrosive preservative.

2.13 Protection of conduit against rust:

2.13.1 All the conduit pipes including accessories shall be given 2 coats of duco paint of white colour or any other colour if specified so as to avoid damage to conduit due to rust. It will be ensured that no bare threaded portion of conduit is allowed to be energized unless they are treated with anti corrosive preservative and painted.

2.13.2 Conduit shall be laid at a minimum distance of 100 mm from the pipes of other non electrical device.

2.14 Fixing of Conduit:

2.14.1 Conduit run on surface shall be supported on M.S. Spacers 3 mm thick, painted with 2 coats of anticorrosive primer, which in turn are properly screwed to the wall or ceiling. Rawl plugs or phil plug shall be used for fixing the spacers. Conduit pipes shall be fixed on the spacers using C. I. saddles of suitable size and heavy gauge (SWG). Saddles shall be at intervals of not more than 50 cm. Conduit shall be neatly run parallel or at right angle to the walls of the buildings.

2.14.2 Saddles shall not be less than 24 gauge for conduit upto 25 mm diameter and not less than 20 gauge for larger diameter.

2.14.3 Where conduit pipes are not to be laid along the trusses, steel joints etc., the same shall be secured by means of ordinary clips or girder clips as approved by the Engineer-in- charge. Where is not possible to drill holes in the truss members suitable clamps with bolts and nuts shall be used. The width and the thickness of the ordinary clips or girder clips and clamps shall be approved by the Engineer-in-charge.

2.15 Bends in Conduit:

2.15.1 All necessary bends in the system including diversion shall be done by bending pipes or by inserting suitable solid or inspection type normal bends, elbows or similar fittings, or by fixing cast iron inspection boxes whichever is most suitable. Conduit fittings shall be avoided as far as possible on conduit system exposed to weather. Where necessary solid type fittings shall be used. Radius of bends in conduit pipes shall not be less than 7.5 cm.

2.16 Outlets:

2.16.1 The switch or regulator boxes shall be made of metal on all sides. Incase of office buildings Hylam sheets/bakelite sheets of 3 mm thickness and white colour finish may be used for the front side of the box. In Industrial buildings, the front side of the boxes shall also be of mild steel. In case of cast iron boxes, wall thickness shall be atleast 3 mm and in the case of welded mild steel sheet boxes the fabrication shall be carried out from 16 gauge sheet steel. The edges of the M.S. Boxes shall be folded inside to support bakelite/hylam

CUMMUNITY HALL

sheet. In no case M. S. Boxes with corner pieces welded for supporting the hylam sheet shall be provided.

2.16.2 In case of M.S. Cover for the front side of the switch boards, all the four edges of these cover shall be folded inside for a depth of atleast 4 mm.

2.16.3 Clear depth of the box shall not be less than 50 mm and this shall be increased suitable to accommodate mounting of fans regulator in flush pattern.

2.16.4 Only a portion of the M.S. Boxes shall be sunk in the wall, the other portion being projected out for suitable entry of conduit pipes into the box.

2.16.5 Control switches shall be connected in the phase conductors only and shall be 'ON' when knob is down. Switches shall be fixed in sheet steel boxed with cover plates as specified. Chromium plated brass screws shall be used for fixing of switches.

2.16.6 Power Point wiring shall be distinctly separated for light Point wiring. Conduits not less than 25 mm and wires not less than 6 sq. mm aluminium or equivalent copper shall be used for power wiring.

2.17 Earthing of Conduit:

2.17.1 The conduit of each circuit or section shall be completed before conductors are drawn. The entire system of conduit after erection shall be tested for mechanical and electrical continuity throughout and permanently specified in earthing system.

2.17.2 Bare earth wire of size not less than 12 gauge aluminium shall be run with each conduit and clamped along the run and specifically across threaded joints using copper earth clamps. 2.17.3 Gas or water pipe shall not be used as earth medium.

2.17.4 If conduit pipes are liable to mechanical damage they shall be adequately protected. In a conduit system, pipe must be continuous when passing through walls or floors.

2.18 Flexible steel conduit:

2.18.1 Flexible conduit shall be used only where absolutely unavoidable. Flexible conduits shall be formed from the continuous length spiral antilocked strip steel with fused zinc coating on both sides. The conduit shall be terminated in brass adapters.

2.18.2 All unused conduit entries shall be blocked off in an approved manner and where conduits are terminated in adapter boxes, all removable

box covers shall be firmly secured to provide complete enclosures.

2.19 Recessed conduit wiring system:

2.19.1 Recessed conduit wiring system shall comply with all the requirements of surface conduit wiring and in addition shall also comply with following requirements.

2.19.2 Making of chase

The chase in the wall shall be neatly made and of ample dimensions to permit the flexing of conduit pipe in an approved manner. In case of building under construction, conduit shall be buried in the wall before plastering and shall be finished neatly after erection of conduit. In case of exposed brick masonry work, special care shall be taken to fix the conduit and accessories in position along with the building work. In case of new construction the scope of work under the electrical contractor shall be responsible for providing chase in the wall, fixing up the conduits and finishing of the wall complete. However, final painting after plastering will be carried out by the agency.

2.19.3 Fixing of conduit in case:

The conduit pipe shall be fixed by means of staples or by means of saddles not more than 60 cm apart. Fixing of standard bends or elbows shall be avoided as far as possible and all curves maintained by bending conduit pipe itself with long radius which will permit easy drawing of conductors. All threaded joints of conduit pipes shall be treated with approved 'preservative compound' to ensure protection against rust.

2.19.4 Inspection boxes:

CUMMUNITY HALL

Suitable inspection boxes to the barest minimum requirements shall be provided to permit periodical inspection to facilitate replacement of wires, if necessary. These shall be mounted flush with the suitable ventilating holes shall be provided in the inspection box covers.

2.19.5 Types of accessories to be used:

All outlets such as switches, wall sockets etc. may be either flush mounting type or surface mounting type as specified. The outlet box shall be efficiently earthed with conduit by an approved means of earth attachment.

To facilitate drawing of wire in the conduit G.I. fish wire of 10 SWG shall be provided along with laying of recessed conduit.

2.20 Wires:

2.20.1 All wires shall be PVC insulated single core copper or aluminium as specified and shall be any 660 volts grade.

2.20.2 Wires of single strand is permissible upto 2.5 sq. mm size. Beyond this size wires with stranded conductors only be used.

2.20.3 All wiring termination shall be with crimped lugs except in case of termination on piano type switches and piano type sockets outlets.

2.20.4 Conduits buried in concrete structure shall be put in position and securely fastened to the reinforcement and got approved by the Engineer-in-charge before the concrete is poured. Proper care shall be taken to ensure that the conduits are neither dislocated nor choked at the time of pouring the concrete. Suitable fish wires shall be drawn in all conduits before they are embedded.

2.20.5 No conduit shall be buried in concrete or plastered unless the work has been inspected and inspected and approved by the Engineer-in-charge.

2.21 Mode of Measurement:

2.21.1 Sub main wiring from main building panel or distribution panel to sub distribution panels shall be measured on linear basis and paid separately.

2.21.2 Wiring from distribution board to the ceiling rose or socket outlet through the switchboard shall be measured on point basis and shall include for all the items as indicated in the detailed specifications.

2.21.3 Socket outlets on the lighting distribution boards shall be measured and paid separately. 2.21.4 Building panel board, distribution boards, light fittings ceiling fans and exhaust fans shall also be measured and paid separately.

2.21.5 In case of power point, the point wiring shall include for the wiring from distribution board right upto the power outlet including isolating switch, socket outlet etc. all as specified.

Table – I

MAXIMUM PERMISSIBLE NUMBER OF 250 V GRADE SINGLE CORE CABLES THAT CAN BE DRAWN INTO RIGID STEEL CONDUITS

Size of Cable		20		25		32		40		50	
Nomina l Cross Sectional Area mm ²	Number of Diameter in mm of Wires										
1.5		S	B	S	B	S	B	S	B	S	B
2.5											
4											
6											
10						8	6				

CUMMUNITY HALL

16	7	6			
25	5	4	8	6	9
35	4	3	7	5	8
50	2		5	4	6
	2		5	4	6

* For copper conductors only.

+ For aluminium conductors only.

MAXIMUM PERMISSIBLE NUMBER OF 250 V GRADE SINGLE CORE CABLES THAT MAY BE DRAWN INTO RIGID NON METALLIC CONDUITS

Size of Cable		Size of Conduit (mm)			
Nominal Cross Sectional Area mm ²	Number & Diameter in mm of Wires	20 (Number of Cables, Max)	25	32	40
1.0	1/1.12*	7	13	20	
1.5	1/1.40	6	10	14	
2.5	1/1.80	5	10	14	
4.0	3/1.06*				
4.0	1/2.24	3	6	10	14
6.0	7/0.85*				
6.0	1/2.80	2	5	8	11
10	7/1.06*				
10	1/3.55+		4	7	9
16	7/1.40*				
16	1/1.70		2	4	5
25	7/2.24			2	2
35	7/2.50				2
50	7/3.00+				2
	19/1.80				3

* For copper conductors only

+ For aluminium conductors only.

SECTION – 3

TECHNICAL SPECIFICATIONS FOR CTS WIRING

3.1 CTS wiring is not permitted for industrial and office buildings. However, in case of residential buildings CTS wiring may be allowed for internal wiring.

3.2 Sub-main wiring from the supply company cut-out to the main switch in each flat shall be carried out in surface / concealed conduits only.

3.3 Wires used in CTS wiring shall be white colour 250 volts grade PVC insulated PVC sheathed aluminium single core stranded wires of size as specified in Schedule of Quantities. 3.4 Teakwood battens used shall be of good quality 12 mm thick well polished and without any burrs. Wooden bends shall be used in all corners.

- 3.5 Tinned brass clips of 34 gauge thickness and of proper size shall be used.
- 3.6 Wooden battens shall be fixed to the wall with rawl plugs/ quick adhesive paste and G.I. plated wood screws of size not less than 40mm shall be used for fixing battens. Fixing screws shall be provided at a distance of not more than 600 mm.
- 3.7 Wooden boards used shall be of good quality, workmanship and finish and varnished insided all polished outside. Full length hinges shall be used for the board. Clips for locking the board shall be of heavy design.
- 3.8 Rates quoted against point wiring shall include for switchboards of adequate size, complete wiring from main switch / D.B. as applicable, round blocks, ceiling rose, connector strips etc. all complete.
- 3.9 Twisted wires are not allowed for looping circuits. Mechanical connectors shall be used for this and the connectors will be fixed to the base of switch boards.
- 3.10 Earth leads of size as specified shall be used for the entire length of wiring.
- 3.11 Wherever wiring crosses walls/beams, PVC/Porcelain pipe sleeves shall be provided for the crossings.
- 3.12 Specifications laid down for conduit system of wiring shall be applicable for CTS wiring also in respect of layout, design of circuit, installation of switchboards etc.
- 3.13 In case of residential buildings, while laying out the wiring system care shall be taken to ensure that lighting circuits, junction of distribution boards are not located in areas where damages due to rain water, leakages from the bath rooms and toilets are likely to take place.
- 3.14 In case of stair case blocks, the junction boxes and control switches wherever provided shall be made flush with the wall.
- 3.15 Main switch board and meter boxes shall be located at the ground floor below the stair case or in a separate room as provided at site. While fixing the location of meter boxes care shall be taken to see that rain water does not flood the meter room during monsoon.
- 3.16 Wherever power supply is to be obtained from the supply company, provision of meter boxes shall be made as per requirements of local supply company.
- 3.17 For lighting point aluminium wires of 1.5 sq.mm or equivalent shall be used. For sub- main wiring sizes of wire shall be not less than 2.5 sq.mm. aluminium or equivalent copper. In case of power circuit 4 sq.mm aluminium shall be made use of. For specified applications like electrical heaters, geysers, cooking range, etc. proper size of conductor shall be selected taking in to consideration the load to be connected.
- 3.18 In case of residential flats where total connected loads exceeds 5 KW, 3 phases distribution board may be obtained depending upon the supply company regulations. In case where 3 phase power supply is obtained for residential premises, care shall be taken to ensure that the distribution of load among the 3 phases are more or less equal.
- 3.19 Mode of Measurements :
- 3.19.1 Sub main wiring from main building panel or distribution panel to sub distribution panels shall be measured on linear basis and paid separately.
- 3.19.2 Wiring from distribution board to the ceiling rose or socket outlet through the switch board shall be measured on linear basis and paid separately.
- 3.19.3 Socket outlets on the lighting distribution boards shall be measured ++and paid separately.
- 3.19.4 Building panel board, distribution boards, light fittings, ceiling fans and exhaust fans shall also be measured and separately.
- 3.19.5 In case of power point the point wiring shall include for the wiring from distribution board right upto the power outlet including isolating switch, socket outlet etc. all as specified.

SECTION – 4**TECHNICAL SPECIFICATIONS FOR CABLE LAYING**

4.1 All cable shall be PVC insulated, sheathed end steel armoured with an outer PVC protective sheath. Cables shall have high conductivity stranded aluminium conductors and cores shall be colour coded as per Indian Standards.

4.2 All cables shall be without any kinks or visible damage.

4.3 Cables shall be laid in the routes marked in the drawings. Where the route is not marked, the contractor shall mark it out on the drawings and also on the basis of actual site measurements.

4.4 Cable laid directly in ground shall be at a depth of 60 cms for (L.T.Cables) and laid on a bedding of sifted earth sand. After the cables are laid over the sand bedding, burnt bricks shall be placed across the cables and for the entire length of cable. Laying of bricks along the cable shall not be accepted under any circumstances. In case of H.T. cables concrete tiles of approved design and with suitable markings shall be placed above the cables. Road crossings and concreted areas shall be negotiated through buried C.I. / RCC pipes. Cable shall be bent to a radius of not less than 8 diameters, leaving sufficient slack for soil subsidence and loops at both ends. Loops shall be provided at both ends of the cable and near straight through joints as directed by the Engineer-in-Charge. Wherever more than one cable is buried in one trench, non-corroding identification tags shall be provided on each cable at 10 M intervals. In addition suitable galvanized cable markers shall be provided above ground over behinds, loops crossings at every 30 M interval on straight runs.

4.5 Cables shall have twin continuous aluminium/G.I. conductors as specified against each item along the entire length of cable for continuous earthing. Cables shall be earthed at both ends.

4.6 All cables shall be properly terminated with glands, tinned copper lugs and cables identification tags and shall be properly crimped or soldered with lugs as directed.

4.7 All the indoor cables shall be laid on walls, ceilings, inside shafts, with suitable supports. Distance between supports shall not be more than 50 cms.

4.8 Cables shall be laid indoors by using 3 mm thick M.S. spacers with G.I. saddles and screws.

4.9 Cables laid directly in existing trenches shall be properly supported by M.S. Clamps.

4.10 Straight through joints shall not be permitted where the route length does not exceed one full drum length. In case of routes where the length exceeds on full drum length, minimum number of straight through joints as approved by the Engineer-in-charge shall be provided. However, no separate payment will be made for such straight through joints.

4.11 Cables shall be tested before laying and after laying but definitely before connecting up to the switch gears.

4.12 After the cable installation is complete, the entire installation shall be tested with 500 V insulation resistance tester and following reading established.

(i) Continuity on all phases

(ii) Insulation resistances between conductors, conductors and ground.

All test readings shall be recorded and handed over to Engineer-in-Charge.

4.13 In case of High Tension cables the insulation test shall be carried out using 2000 V meggar. In addition to this pressure test shall be carried out on the H.R. Cables as specified in IS:1255 – Code of Practice for installation & maintenance of paper insulated power cables. 4.14 **Mode of Measurements :**

CUMMUNITY HALL

4.14.1 All cabling shall be measured on the basis of unit length and the cost per unit length shall include cost of cable, cost of supports, clamps, labour for installations, testing & commissioning all complete.

4.14.2 In the case of cables laid in ground/duct, excavation sand cushioning, brick covering & back filling shall also form part of the cabling.

4.14.3 While all cable supporting clamps are to be included in the unit cost of cables, cable trays or cable racks wherever specifically indicated shall be paid extra on unit rates.

4.14.4 Cable terminations shall be measured per set and the cost shall include cost of tinned copper lugs, brass glands, all jointing materials, bolts and nuts, M.S. plate support labour and any other incidental items not specifically indicated above.

SECTION – 5

TECHNICAL SPECIFICATIONS FOR ELECTRICAL FITTINGS, FIXTURES AND FANS

5.1 Fluorescent Light Fittings :

5.1.1 All fixtures shall be complete with accessories and fixing necessary for installation completed in all respects. Fixtures connected to emergency lighting systems shall have distinct red markings.

5.1.2 Fixtures shall be installed at mounting heights as detailed on the drawings or instructed at site by the Engineer-in-charge.

5.1.3 Fixtures and/or fixture outlets boxes shall be provided with hangars to adequately support the weight of the fixture. Design of hangars and method of fastening shall be as approved by Engineer-in-charge unless otherwise specified in the drawings and tender specifications.

5.1.4 Pendant fixtures within the same room or area shall be installed plumb and at a uniform height from the finished floor. Provision for adjustment of height during installation shall be made.

5.1.5 Flush mounted recessed fixture shall be installed so as to completely eliminate light leakage within the fixture & between the fixture and adjacent finished surface.

5.1.6 Fixture mounted on outlet boxes shall be rigidly secured to a fixture stud in the outlet box. Extension pieces shall be installed where required to facilitate proper installation.

5.1.7 Fixture shall be completely wired and constructed so as to comply with the ISS and IE Regulations for Electric Light Fixtures. Fixtures shall bear manufacturer's name & the Factory Inspection Labels.

5.1.8 Wherever specific make of fixtures are indicated in the Tender Specifications, the entire fixture shall be Factory Assembled from the manufacturers. Locally assembled fittings with components from primary manufacturers shall not be accepted.

5.1.9 Wiring within the fixture and for connection to the branch circuit wiring shall be with wire of size not less than 1.5 sq.m. copper for 250 Volts applications. Insulation of the wire shall suite the temperature conditions inside the fixtures.

5.1.10 Sheet metal used for manufacturing of lighting fixtures shall not be less than 22 SWG or heavier if so required to comply with the specification or standards. Sheet Steel reflectors shall have a thickness of not less than 20 SWG. The parts of the fixtures shall be completely free from burrs and tool marks. Soldering shall not be used as mechanical fastening device on any part of the fixture.

CUMMUNITY HALL

5.1.11 Ferrous metal shall be given corrosion resistant phosphate treatment or other approved rust inhibiting primer coat to provide a rust-proof base before application of final coat of finish.

5.1.12 Non reflecting surface such as fixture, frame, etc. shall be finished with baked enamel paint.

5.1.13 Light reflecting surface shall be finished baked white enamel having a reflection factor of not less than 80%. All parts of reflector shall be completely covered by the baked enamel finish and shall be free from irregularities in surface. After the finish coat is applied and cured, it should be capable of withstanding a 6mm radius bend without showing signs of cracking, peeling or loosening from the base metal. Finished surface shall be capable of withstanding 72 hours exposure to an ultra-violet sun lamp placed 10 cm from the surface without discoloration, hardening or warping and retain the same reflection factor after exposure.

5.1.14 Fixtures with visible frames shall have concealed hinges and catches. Pendant fixtures and lamp holders shall be provided with ball type aligners or similar approved means for adjustments. Recessed fixture shall be constructed so as to fit an acoustic tile ceiling or plaster ceiling without distorting either the fixture or the ceiling. Plaster rings shall be provided for plaster ceilings. Fixtures with hinged diffuser doors shall be provided with spring clips or other retaining devices to prevent the diffuser from moving.

5.1.15 Detailed catalogue and technical data for all fixtures or wherever desired by the Engineer-in-charge, Sample fixtures shall be submitted for approval to the Engineer-in-charge before orders for the fixtures are placed. Shop drawings for non-standard fixture types shall be submitted for approval to the Engineer-in-charge.

5.1.16 Recessed fixtures shall be constructed so that all components are replaceable without removing housing from the ceiling.

5.1.17 Lamp shall be supplied and installed in all lighting fixtures provided under this contract. Lamps used for temporary lighting service shall not be used in the final lamping of fixtures. Lamps shall be of wattage and type as shown on the drawings. Wherever not shown, the details shall be ascertained from the Engineer-in-charge before procurement. Lamps for permanent installation shall not be placed in the fixtures until so directed by the Engineer-in-charge and this shall however be accomplished immediately before the building portions are ready for occupation.

5.1.18 Only single and or two lamp ballast shall be used in any one fixture. Ballasts shall be completely enclosed inside sheet steel casing, and shall have a corrosion resistant finish. Ballasts shall contain a thermosetting type compound not subject to softening or liquefying under any operating conditions or upon ballast failure. Compound shall not support combustion. All ballasts shall be copper wound and shall be of high power factor compensated to above 0.9 P.F. Ballast temperature and sound rating rise shall be specified by the manufacturer and guaranteed. Ballasts shall be for operation at the voltages and frequencies indicated and under temperature conditions prevailing in the various locations of the premises.

5.1.19 All fluorescent fixtures shall be provided with separate wiring channel with cover plate and an earth terminal. All screws shall be chromium brass screws. Lamps and starter holders shall be out of tough mounted plastic with spring loaded rotor type contactors rendered shock and vibration proof. Condensers shall be of low oil paper impregnated hermetically sealed type complying with ISS. Internal wiring is passing by the ballast in a suitable heat resistant barrier or sleeve shall be provided.

CUMMUNITY HALL

5.1.20 Surface mounted fixture longer than two feet shall have one additional point of support besides the outlet box fixture stud when installed individually. Pendants for individually mounted fixtures of 1.2m long and small shall be provided with twin stem/conduit hangars. Stems shall have ball aligners or similar devices and provision for a minimum of 25 mm vertical adjustment.

5.1.21 Stems shall be of appropriate length to suspend fixtures at required mounting height. 5.1.22 Lamps, starters and ballasts provided with each fittings shall match the lamp specified.

5.2 Incandescent Fittings :

5.2.1 Incandescent fittings shall be of the type specified in the drawings and schedule.

Contractor shall submit samples to Engineer-in-charge and obtain approval in writing before procurement of fittings.

5.2.2 Incandescent fixtures shall be equipped with porcelain, ceiling rose and B.C. type sockets for lamps upto and including 200 watts and screw type base for lamps 300 watt and over.

5.2.3 Re-lamping the fixture shall be possible without removing the fixtures from its location. 5.2.4 Incandescent lamps shall be inside frosted or clear type as specified by the Engineer- in-charge.

5.3 Highbay/Street light fittings :

5.3.1 Highbay/street light fittings shall be with HPMV/SON/HALOGEN/MLL Lamps as specified in the schedule.

5.3.2 Rates quoted against light fittings shall include for the complete light fittings, control gear, bulb etc. all complete in factory wired and assembled condition. Locally assembled fittings and control gear shall not be accepted. Rate shall also include for fixing arrangement for the fittings and control gear. Fixing arrangements shall have prior approval from Engineer-in-charge.

5.3.3 In case of street light fittings, rates quoted against fittings will be excluded from the arm over the pole, but will include for lead wire from pole mounting box and all other hardware necessary to complete the work.

5.3.4 Street light poles shall be of M.S. ERW Type conforming to IS 2713- 1969. Pole size and other fixing arrangements shall be as per

Drawing No.CWP/STD/EM-48D, CWP/STD/EM-51B, CWP/STD/EM- 29C or CWP/STD/EM-50B whichever is applicable

5.3.5 Sample of the pole shall be submitted and approval of Engineer-in charge obtained in writing before order is placed for the full quantity....

5.3.6 Rate quoted against pole item shall include for excavation, concrete foundation, pole earthing studs, arm for fitting, fixing bracket for control gear, pole cap etc. all complete.

5.3.7 Poles shall be erected absolutely vertical.

5.3.8 All buried portions of the poles shall be given a primer coat and two coats of bituminous paint. All exposed portions shall be given one primer coat and two coats of aluminium paint before erection. In addition, one more coat of aluminium paint shall be given after the fittings are erected and work completed.

5.4 Fans, Regulators and Clamps :

5.4.1 Ceiling fans including their suspension shall conform to relevant ISS with secondary safety device incorporated against free fall of fans from their hooks.

5.4.2 All ceiling fans shall be wired to ceiling roses or to special connector boxes and suspended from hooks or shackles. There shall be no joints in the suspension rod.

CUMMUNITY HALL

5.4.3 In case of “I” beams, the suspension arrangements fabricated out of M.S. plates shall be shaped suitably to catch the flanges and shall be held together by means of laying bolts, nuts, check nut and split pin.

5.4.4 For concrete roofs, ceiling fans hooks shall be got buried in the concrete during construction.

5.4.5 Fan hooks made of M.S. rods of 15mm diameter shaped in ‘U’ form with their legs projecting horizontally on the top at east 19 cm on either side and tied over the top reinforcement of the roof shall be laid in the concrete slabs.

5.4.6 The suspension arrangement for the fans shall be so designed that the fans canopies shall completely hide suspension element.

5.4.7 Unless otherwise specified all ceiling fans shall be hung 2.75M above the floor.

5.4.8 In the case of measurement of extra down rod for ceiling fans including wiring, the same shall be measured in units of 10 cms & length less than 5 cm shall be ignored. The cost of wiring for extra down rod shall be paid as per supplying and drawing cable in existing conduits.

5.4.9 Exhaust fans shall conform to relevant ISS.

5.4.10 Exhaust fans shall be erected at the places indicated by the Engineer in-charge. For fixing exhaust fans a circular opening shall be provided in the wall to suit the size of the frame, which would be fixed by means of rag bolts, embedded in the walls, opening shall be neatly plastered to the original finish of the wall. The exhaust fan shall be wired as near to the opening as possible by means of flexible cord. Care being taken that the blades rotate in the proper direction.

5.4.11 The exhaust fan for installation in corrosive atmosphere shall be painted with special PVC paint or chlorinated rubber paint. Installation of exhaust fan in kitchen, dark room and such other special locations shall be carried out giving due consideration for the specific requirements.

5.4.12 The body of the ceiling fan, exhaust fan and fan regulator shall be connected to the earthing system by proper earth leads.

5.5 Mode of Measurements :

5.5.1 each lamp, fixtures, shall be measured as a unit complete with all accessories, lamps, mounting, wiring, connection, earthing etc. all complete.

5.5.2 Each street light pole shall be measured as a separate unit complete including excavation, erection of pole, pole cap, bracket etc. all as specified and in conformity with the drawing and specifications.

5.5.3 Exhaust fan and ceiling fans shall be measured as a complete unit including fixing up and connecting the fans, regulator, earthing arrangement, blanking opening in the wall, in case of exhaust fan etc.

SECTION – 6

TECHNICAL SPECIFICATIONS FOR CIRCUIT BREAKERS, PANEL BOARDS AND DISTRIBUTION BOARDS

6.1 Circuit Breakers :

6.1.1 Circuit breakers shall preferably be air break horizontal type fully interlocked and meeting the requirements of IS:2516 or BS:3659. Breakers shall be rated for a medium voltage of 600 V and rated full load amperes as indicated on drawings. Breakers shall be capable of making and breaking system short circuits.

CUMMUNITY HALL

6.1.2 Breakers shall be manually operated complete with panel operating handle, isolating plug with safety shutters, mechanical ON/OFF indicator, silver plated arcing and main contact arc chutes and trip free operation. Breakers shall be capable of being racked out into 'Testing', 'Isolated' and 'Maintenance' positions and kept locked in any of the positions.

6.1.3 Over current releases shall be triple pole direct acting trips and all such tripping devices/shall be capable of discriminating with MCCB's down stream. External relays shall be with AC series trips and where shunt trips are incorporated necessary DC source power shall also be provided with associated charger, cabling etc. as forming part of the circuit breaker cost.

6.2 Switch Fuse Units :

6.2.1 Switch fuse units shall have quick-make, quick break silver plated preferably double break contacts with operating mechanism suitable for rotary operation in the case of cubicle mounting. All Switches shall be rated according to the Schedule of work or drawings and shall withstand the system fault current. Cam operated rotary switches with adequate terminal adaptors upto 25A are acceptable but for all higher rating switch fuse units shall be heavy duty type conforming to I.S.4047.

6.2.2 Fuses shall be HRC Cartridge type conforming to I.S.2208 with a breaking capacity corresponding to system fault level. Fuses shall be link type with visible indication. Screw type fuses are not acceptable for any ratings. Fuses shall be provided only in the phase conductors even in case of double pole switches, Neutral, wherever provided, shall have suitable links only.

6.2.3 All disconnectors shall consists of switch units quick make, quick break type with silver plated contacts. The switches shall preferably have double breaks. All switches shall be mounted in steel sheet enclosure, which in turn is mounted on suitable angle iron frame work. All switches shall have cast iron enclosure except for ratings where manufacturers do not make switches with cast iron enclosure. For such ratings switches with sheet steel enclosure, supplied by manufacturer as a complete unit shall be supplied. Dis connectors shall have a minimum breaking capacity of 5 KA at 415 volts.

6.3 Cubicle Boards :

6.3.1 All boards shall be combination 14 and 16 SWG sheet steel, free standing, extensible, totally enclosed, dust tight, vermin-proof cubicle, flush dead front and modular construction suitable for 3 phase 440 V 4 wire 50 Hertz system. All Boards shall be accessible from the front for the maintenance of switch fuses, bus bars, cable terminations, meters, etc. Cables shall be capable of entering the board both from top as well as bottom. All panels shall be machine pressed with punched openings for meter etc. All sheet steel be rust inhibited through a process of degreasing, acid pickling, phosphating etc. The panel shall be finished with two coats of red oxide primer and finished with two coats of synthetic enamel paint of approved shade. Engraved plastic labels shall be provided indicating the feeder details, capacity and danger signs.

6.3.2 The boards shall accommodate air insulated bus bars, circuit breakers, switch fuse units with HRC fuses, starters, necessary meters, relays, contactors etc. as required and shown on drawings and arranged in suitable tiers.

6.3.3 The switch board shall be fully compartmentalized in vertical tiers housing the feeder switches in different totally enclosed independent compartments. Each compartment shall be self-sufficient with switch unit fuses, contactors, relays, indicating lamps and inter-locked door with facility for padlocking. Each feeder must terminate in an independent labelled terminal block. Strip type terminal block accommodating several feeders together is not acceptable. Pressure clamp type terminals suitable for aluminium wires may be used upto

switches of 25 A and cable lugs for higher rating. All terminations shall be shrouded in an approved manner. The entire enclosure shall meet with I.S. 2147. Feeder connections shall be out of solid insulated copper wires or strips with bimetallic clamps wherever required. Internal wiring, bus bar markings etc. shall conform to I.S.S.

375. Internal wiring shall have terminal ferrules. Main switch should be at easily accessible height and the highest switch operating handle should not be over 1.75 M from floor level. Cable glands shall not form part of the switch board, as the cost of glands will form part of the cable termination.

6.3.4 Bus bars shall be three phase and neutral and of tinned copper rated for a temperate rise of 35°C over the ambient temperature specified based on bare conductor ratings. Current density shall not exceed

130 Amp/Sq.cm for aluminium and 160 Amp/Sq.cm for copper. Neutral bars may be of one half the size of the phase bars. The main bus bars shall be of uniform cross section and rated for 50% above the incoming switch. The vertical bus bars for the feeder columns may be rated at 75% of aggregate feeder capacity and shall be uniform in size. Bus bars and inter-connections shall be taped with PVC colour coded tape to prevent bar to bar accidental shorts. Each bus bar shall be directly and easily accessible on removal of the front cover and shall be supported on non-hydroscopic insulator blocks to with-stand thermal and dynamic overloads during system short circuits. An earth bus of 50% of the phase bar shall be provided subject to the following minima and maxima.

Copper Aluminium

Minimum 6.5 sq.mm 10 sq.mm

Maximum 65 sq.mm 120 sq.mm

Individual switch components shall be connected with the earth bus through copper wire/ strips; size of connecting wire being as above.

All wire connections to bus bars shall be through lugs, bolts, and nuts and spring washers. 6.4 Panel Boards :

6.4.1 All the panels shall consist of ammeter, volt-meter of adequate ranges and indicating lamps.

6.4.2 Bus bar chamber shall have removable end covers and bus bars shall have bolt holes provided at both ends to enable future extension of panels on either side.

6.5 Industrial Panel Bards :

6.5.1 The frame shall be fabricated out of 50mmx 50mm x 6mm M.S. angles and horizontal supports of M.S. flats not less than 50mm x 6mm size. The frame shall be welded, and shall be floor mounting, self supporting type.

6.5.2 The bus bar chamber shall be of 14 SWG sheet steel, extensible, totally enclosed, dust tight, vermin proof cubicle, flush dead front and construction suitable for 3 phase 415 V 4 wire, 50 Hertz system. The bus bar chamber shall accommodate bus bars complying with the Technical Specifications given in this section.

6.5.3 The switches should be at easily accessible height and the heighest switch operating handle should not be over 1.75 M from floor level.

6.5.4 All the interconnections shall be solid copper links and shall be taped properly as per the colour code.

6.5.5 Engraved plastic labels shall be provided indicating the feeder details, capacity and cable sizes.

6.5.6 'DANGER' sign board shall be fixed on the front cover.

6.5.7 The complete frame and bus bar shall be painted to match the switches.

6.5.8 Arrangements for terminating earth strip shall be provided on the frame.

6.5.9 Cable entry boxes shall be provided for all incoming and outgoing cables.

6.5.10 The panel shall be grouted in the floor with all the necessary hardware.

6.5.11 The sub-panels should be mounted on suitable M.S. frames and job includes grouting the same on the wall/floor with all the necessary hardware.

6.5.12 Bus bar chamber shall be completely compartmentalized openings made at top and bottom for switches shall be blocked with bakelite sheets and bushed openings provided for interconnecting leads.

6.6 Testing and Inspection :

6.6.1 All switch boards shall be subject to factory inspection before finishing and despatch, unless inspection is waived by Engineer-in-Charge.

6.6.2 Certificates for all routine and type tests for circuits breakers in accordance with the I.S.S. 2516 shall be furnished. In addition, all panels shall be meggered phase to phase and phase to neutral using a 1000 V meggar with all switch gear in closed position. Meggar value should not be less than 2.5 megohms between phases and 1.5 megohms between phase and neutral.

6.6.3 All meters and relays shall be calibrated and tested at site by contractor before commissioning through secondary injection tests. Tests shall be carried out in the presence of Engineer-in-Charge or his authorized representative.

6.6.4 All secondary wiring and apparatus connected therewith shall withstand 2000 V for one minute.

6.6.5 All field tests shall be witnessed by Engineer-in-Charge and recorded.

6.7 DISTRIBUTION BARDS :

6.7.1 LIGHTING DISTRIBUTION BOARDS :

6.7.1.1 Lighting Distribution Boards shall be either 6, 8 10 outgoing ways or 12 ways as specified in the Schedule of Quantities with isolators.

6.7.1.2 The capacity of each way shall be 5/10/15 amps and only miniature circuit breaker shall be used.

6.7.1.3 30 amps single pole and neutral isolator shall be used at incoming point of lighting distribution boards.

6.7.1.4 The number of points per way shall not exceed eight or the total connected load per way shall not exceed 800 watts.

6.7.1.5 All the miniature circuit breakers, isolators shall be housed in a specially fabricated M.S. box of 16 gauge size. The front side shall have detachable flush type door. Box shall be painted with one coat of primer and two coats of DUCO paint of approved colour. Complete distribution boards shall be factory assembled by the manufacturer.

6.7.1.6 All the circuit wires shall be properly crimped with lugs and connected to terminals. 6.7.2 POWER DISTRIBUTION BOARDS :

6.7.2.1 The power distribution boards shall be suitable for 3 phase 440 volts supply 4 ways/ 6 way/ 8 way with 32 amps with neutral bar.

6.7.2.2 All the outlets shall be provided with HRC fuse links of 30 Amps capacity.

6.7.2.3 Main switch shall be of IC three phase and neutral.

6.7.2.4 The capacity of main switch shall be as follows :

For 4 way PDBS 63 Amps

For 6/8 way PDBS 100 Amps

6.7.2.5 All the interconnections between distribution board and the switch shall be of solid jumpers / stranded copper wire of suitable capacity.

6.7.2.6 All the circuit wires shall be properly crimped with lugs and terminated as per colour codes.

6.7.2.7 Only one outlet shall be connected per circuit.

6.7.2.8 All the phase strips and neutral links shall be housed in dust proof M.S. Boxes. Complete distribution board shall be factory assembled by Manufacturer.

6.7.3 MOUNTING :

6.7.3.1 Both lighting and power distribution boards shall be properly mounted on angle iron frame.

6.7.3.2 The angle iron frames shall be grouted on wall with suitable bolts.

6.7.3.3 All the distribution boards shall be clearly marked to indicate the various load locations and cable sizes.

6.8 MODE OF MEASUREMENTS :

6.8.1 Each panel complete with various components, earthing etc. shall be treated as one unit for purposes of measurement and payment.

6.8.2 Outgoing feeder termination will be paid for at unit rates separately under cable termination and hence cable glands need not be provided with switch boards unless otherwise specified.

SECTION – 7.0

TECHNICAL SPECIFICATION - FOR EARTHING

7.1 EARTHING :

7.1.1 Earthing Pits :

An earthing pit of 1m x 1m x 2.5 m deep installed with galvanized cast iron plate of 600 mm x 6 mm thick shall be provided. Twin earth leads of G.I. size 25 mm x 3 mm shall be connected to the earth plate by means of tinned copper lugs and brass nuts and bolts. The plaster shall be covered with mixture of charcoal and salt for thickness of 15 cms all around and remaining area filled with general mix of sand & soil. G.I. pipe of 37 mm dia class 'C' shall be installed in the earth pit starting from 15 cms above the earth plate and brought to ground level and shall be provided with a manhole of brick masonry 12" x 12" x 9" (300 mm x 300 mm x 225 mm) around the pipe at ground level with hinged cast iron cover. A bolted and removable link connecting main earth bus outside the pit and portion leading to plates shall be accommodated in this manhole for testing.

7.1.2 Normally an earth pit shall not be situated less than 1.5 mtrs. from any building. Care shall be taken that the excavations for earthing may not affect the footing of the foundations of the buildings.

7.2 The earthing lead shall be securely bolted and soldered to plate. The lead shall be connected by means of cable socket with bolts & nuts.

7.3 The earthing lead shall be suitably protected from mechanical injury.

7.4 No earth electrodes installed shall have a greater ohmic resistance than one ohm as measured by an approved earth testing apparatus.

7.5 The twin strips of size 25 mm x 3 mm of aluminium or G.I. strip shall be connected from earth station to nearest switch gear.

7.6 The cost towards provision and erection of earth station shall include all labour for excavation in soft soil/ hard rock/ concrete apron, back filling of the excavated portion, resurfacing to the original finish including provision of all materials, sundries, consumables and test link.

7.7 The entire work shall be carried out conforming to IS 3043-1966.

7.8 all connections on the earthing system shall be by means of brass nuts and bolts.

7.9 The earth bus and individual earth connecting strips running inside the building shall be suitably supported on wall/columns/under ceiling with proper non-ferrous clamps spaced not more than 900 mm.

7.10 SUB EARTHING :

7.10.1 From main panel, earthing conductor in twin shall be laid along with the cables for continuous earthing. Sizes of earth wire shall be as specified in the schedule of quantities upto the distribution board.

7.10.2 The earth conductors shall be earthed at both ends using properly sized lugs, either by crimping or soldering. Twisted joints are not allowed anywhere in the earthing system. 7.10.3 The earth conductors shall be properly fastened to the cables throughout the run. 7.10.4 All the conduits either surface or concealed shall be laid with 12 SWG bare aluminium earth conductors along the run of conduits.

7.10.5 The copper earthing clamps shall be fastened at threaded joints to ensure proper earthing and all the threaded joints shall be painted with black bituminous paint.

7.11 EQUIPMENT EARTHING :

7.11.1 Metallic Conduit :

Bare aluminium earth continuity conductor clamped at one metre intervals shall be provided throughout the length of conduit. Size of conductor shall be 12 SWG aluminium or equal and copper earth clamps shall be used for fixing. Binding wires are not acceptable.

7.11.2 Non Metallic Conduit :

Same as above but with insulated wire drawn inside.

7.11.3 Armoured cable :

Two distinct earth connections to armouring at both ends of size equivalent to 50% of the phase conductor or minimum of No.8 SWG copper or maximum of 65 MM² copper or equivalent shall run throughout the length of cable.

7.11.4 Three Ph. Power Panels and Distribution Boards :

Two distinct earth connections of same size as per cable sizes.

7.11.5 Single phase DB's :

One earth connection of size shown or as per incoming cable sizes.

7.11.6 Isolating Switch (3 Ph) :

Two distinct earth connections of same size as per cable sizes.

7.11.7 Isolating Switch (1 Ph) :

One earth connection of size shown or as per incoming cables sizes.

7.11.8 3 Ph Motors and other 3 Ph. Apparatus :

Two distinct earth connections of size 50% of connecting cable or No. 8 SWG/ copper or equivalent whichever is higher.

7.11.9 1 Ph. Motors, Light Fittings and other Apparatus :

One earth connection of 14 SWG copper or equivalent.

7.11.10 Street Lights :

As per detailed drawing.

7.12 Mode of Measurement :

7.12.1 Earthing pit shall be measured as a complete unit including provision of earth electrode (Pipe or plate), Earth leads upto the ground level, chamber, excavation refilling with coal and salt, water arrangements etc. all complete.

7.12.2 Earthing leads beyond the removable link from manhole chamber to the nearest main switch board shall be measured and paid separately on a unit length basis.

7.12.3 Earthing leads from power panel, distribution panels etc. shall be measured independently on length basis or measured along with cable or conduit lines depending upon the description given in the schedule of quantities.

7.12.4 Earthing connection to the various fixtures and appliances shall be included as part of the installation rate quoted for the concerned item.

No separate payment for earth connection to these appliances and fixtures shall be made.

SECTION - 8.0

TECHNICAL SPECIFICATION FOR PAINTING

8.1 General : The scope of this section covers 'Painting' to be carried out at Site.

8.1.1 Paints : Paints, oils, varnishes etc. of approved make in original tin to the satisfaction of the Engineer-in-Charge shall only be used.

8.1.2 Preparation of the surface : The surface shall be thoroughly cleaned and dusted before painting is started. The proposed surface shall be inspected by the Engineer-in-Charge or his authorized agent and shall have received the approval before painting is commenced.

8.1.3 Application : Paint shall be applied with brush. The paint shall be spread as smooth and even as possible. Particular care shall be paid to rivets, nuts, bolts, and over lapping. Before drawing out, it shall be continuously stirred in the smaller containers with a smooth stick while it is being applied. Each coat shall be allowed to dry out sufficiently before a subsequent coat is applied.

8.1.4 Scope : Painting on old surface in indoor situations will not include primer coat except where specially mentioned in the Schedule of Work or Special Specification. However, where rust has formed on iron and steel surfaces the spots will be painted with one anti-rust primer coat.

8.1.5 Precautions : All furniture, fixtures, glazing, floors, etc. shall be protected by covering. All stains, smears, splashings, dropping of every kind shall be removed. While painting of wiring etc., it shall be ensured that paintings of wall and ceiling etc. is not spoiled in any way.

8.2 Painting of wiring on wood batten :

The wiring shall after erection be neatly painted with two coats of oil less non-cracking paint of suitable colour to match the surroundings to the satisfaction of the Engineer-in-charge.

8.3 Painting of conduit and accessories : After installation, all accessible surface of conduit pipes, fittings, switch and regulator boxes, etc. shall be painted with two coats of approved enamel paint or aluminium paint as required to match the finish of surrounding wall, trusses etc.

SECTION 9.0

TECHNICAL SPECIFICATION FOR TESTING

9.1 General

On completion of an installation the following tests shall be carried out:-

1. Insulation Resistance Test.

2. Polarity Test.

3. Earth continuity Test.

4. Earth Electrode Resistance Test.

9.1.1 Insulation Resistance

9.1.1.1 The insulation resistance shall be measured by applying between earth and the whole system of conductors of any section thereof with all fuses in place and all switches closed, and except in earthed concentric wiring all lamps in position or both poles of the installation otherwise electrically connected together, a direct current pressure of not less than twice the working pressure provided that it need not exceed 500 volts for medium voltage circuits. Where the supply is derived from the three wire D.C. or a poly phase A.C. system, the neutral pole of which is connected to earth either direct or through added resistance, the working pressure shall be deemed to be that which is maintained between the phase conductor and the neutral.

9.1.1.2 The insulation resistance shall also be measured between all conductors connected to one pole or phase conductor of the supply and all the conductors connected to the neutral or to the other pole or phase conductors of the supply with all lamps in position and switches in 'off' position and its value shall not be less than that specified in sub-Clause 9.1.1.3.

9.1.1.3 The insulation resistance in Meg Ohms measured as above shall not be less than 50 Meg Ohms divided by the number of outlets or when PVC insulated cables are used for wiring 12.5 Meg Ohms divided by number of outlets outgoing circuits.

9.1.1.4 Where an entire installation is being tested, a lower value than that given by the formula, subject to a minimum of 1 Meg Ohm is acceptable.

9.1.1.5 A preliminary and similar test may be made before/lamps etc are installed, and in this event the insulation resistance to earth should be not less than 100 meg ohms divided by the number of outlets or when PVC insulated cables are used for wiring 25 meg ohms divided by number of outlets.

9.1.1.6 The term "outlet" includes every point alongwith every switch except that a switch combined with a socket outlet, appliance or lighting fitting is regarded as one outlet.

9.1.1.7 Control rheostats, heating and power appliances and electric signs may, if required, be disconnected from the circuit during the test, but in that event the insulation resistance between the case or frame work, and all live parts of each rheostat, appliance and sign, shall be not less than that specified in the relevant India Standard Specification or where there is no such specification shall be not less than half a megohm.

9.1.2 Polarity test of switch:

9.1.2.1 In a two wire installation a test shall be made to verify that all switches in every circuit have been fitted in the same conductor throughout and such conductor shall be labelled or marked for connection to phase conductor or to the non earthed conductor of the supply.

9.1.2.2 In a three wire or a four wire installation a test shall be made to verify that every non linked single pole switch is fitted in a conductor which is labelled or marked for connection to one of the phase conductor of the supply.

9.1.2.3 The installation shall be connected to the supply for testing. The terminals of all switches shall be tested by a test lamp, one lead of which is connected to the earth. Glowing of test lamp to its full brilliance, when the switch is in "ON" position irrespective of appliance in position or not, shall indicate that the switch is connected to the right polarity.

9.1.3 Testing of earth continuity path :

9.1.3.1 The earth continuity conductor including metal conduits and metallic envelopes of cables in all cases shall be tested for electric continuity and the electrical resistance of the same alongwith the earthing lead but excluding any added resistance or earth leakage circuit breaker measured from the connection with the earth electrode to any point in the earth continuity conductor in the completed installation shall not exceed one ohm.

9.1.4 Measurement of earth electrode resistance :

9.1.4.1 Two auxiliary earth electrodes besides the test electrode are placed at suitable distance from the test electrode (see figure). A measured current is passed between the electrode 'A' to be tested and an auxiliary current electrode 'C' and the potential difference between the electrode 'A' and auxiliary potential electrode 'B' is measured. The resistance of the test electrode 'A' is then given by –

V

R = -----

I

Where,

R - Resistance of the test electrode in ohms.

V - Reading of the voltmeter in volts.

I - Reading of the ammeter in amps.

CURRENT □ SOURCE

////////// //

X + 1 m

A B C

TEST POTENTIAL CURRENT

ELECTRODE ELECTRODE ELECTRODE

9.1.4.2 (a) Stray currents flowing in the soil may produce serious errors in measurement of earth resistance. To eliminate this, hand driven generator is used.

(b) If the frequency of the supply of hand driven generator coincides with the frequency of stray current there will be wandering of instrument pointer. An increase or decrease of generator speed will cause this to disappear.

9.1.4.3 At the time of test, the test electrode shall be separated from the earthing system. 9.1.4.4 The auxiliary electrodes shall be of 13 mm diameter mild steel rod driven upto 1 m into the ground.

9.1.4.5 All the three electrodes shall be so placed that they will be independent of the resistance area of each other.

9.1.4.6 If the test electrode is in the form of rod, pipe or plate, the auxiliary current electrode "C" shall be placed at least 30m away from it and the auxiliary potential electrode 'B' shall be placed mid way between them.

9.1.4.7 Unless three consecutive readings of test electrode resistance agree the test shall be repeated by increasing the distance between electrodes A and C upto 50 m and each time placing the electrode 'B' midway between them.

9.1.4.8 On these principles "Megger Earth Tester" containing a direct reading ohm meter, a hand driven generator and auxiliary electrodes are manufactured for direct reading on earth resistance of electrodes.

9.1.5 On completion of an electric installation (or an extension to an installation) a certificate shall be furnished by the contractor countersigned by the certified supervisor under whose direct supervision the installation was carried out. This certificate shall be in the prescribed form as given in Appendix 'A', in addition to the test certificate required by the local Electric Supply Authorities.

SECTION 10.0

ACCEPTED MAKES OF MATERIALS

Sr.No. Articles / Items Approved Makes

1. PVC Wires/ conductors Finolex, Polycab, Sundep
 - 2, Conduits VIMCO / BEC
 3. Cables Gloster, Asian, Polycab, CCI
(until 95 sq.mm.)
 4. Switches, Sockets Standard, Anchor
5 Amps / 15 Amps
 5. 15/30 Amps. ICDP switches Stanley, KEW
 6. I.C.T.P.N. Switches KEW, GE, L&T, Siemens
 7. Lighting Distribution Morarjee Dormans, Legrand
Boards – MCB type
 8. Power Distribution Boards GE, Legrand
 9. All light fittings Crompton / GEC / Philips
 10. Any other item Sample to be sent for
Approval of E.I.C
 11. Change over switches L&T, KEW
-

APPENDIX 'A'

FORM OF COMPLETION CERTIFICATE

I/We certify that the installation detailed below has been installed by me/us and tested and that to the best of my/our knowledge and belief, it complies with Indian Electricity Rules, 1956, as well as IS:732 – Code of practice of Electrical wiring Installations (system voltage not exceeding 650 volts)

Electrical Installation at _____

Voltage & system of supply _____

1. Particulars of Works :

(a) Internal Electrical Installation

No. Total Load Type of system

Of wiring

(i) Light point

(ii) Fan point

(iii) Plug point

(a) 3 pin 5 amp

(b) 3 pin 15 amp

(b) Others

Description HP / KW Type of starting

(a) Motors (i)

(ii)

(iii)

(b) Other plants :

...2

.. 2 ..

(c) If the work involves installation of over headline and/ or under ground cable.

[a] (i) Type & description of overhead line

(ii) Total length and No. of spans

(iii) No. of street light and its description.

[b] (i) Total length of underground cable & its size.

(ii) No. of joints End Joint :

Tea Joint :

St. through Joint :

Earthing :

(i) Description of earthing electrode

(ii) No. of earth electrodes.

(iii) Size of main earth lead.

Test Results :

(a) Insulation Resistance

(i) Insulation resistance of the whole system of conductors to earth Megohms

(ii) Insulation resistance between the phase

Conductor & neutral -

Between phase R and neutral Megohms

Between phase Y and neutral Megohms

Between phase B and neutral Megohms

(iii) Insulation resistance between the phase

Conductors in case of poly phase supply

Between phase R and phase Y Megohms

Between phase Y and phase B Megohms

Between phase B and phase R Megohms

(b) Polarity Test

Polarity of non linked single pole branch switches.

(c) Earth continuity test

Maximum resistance between any point in the earth continuity conductor

conductor including metal conduits and main earthing lead Ohms

(d) Earth Electrode Resistance

(i) Ohms

(ii) Ohms

(iii) Ohms

(iv) Ohms

(e) Lighting Protective System

Resistance of the whole of lighting protective system to earth before any bonding is effected with earth electrode and met-1 in/on the structure ... Ohms

Signature of the Supervisor Signature of Contractor

Name and address Name and address

Item No.25 Point wiring for Light /Bell with 2-1.5 sq.mm (Green) both are of ISI marked 1.1 KV Grade FRLS PVC insulated multistrand copper wires, in following type of pipe to be erected concead in/on surface on wall/ceilling complete with 6A Modular type awitch / bell push & accessories and earth continuity of following type, erected on PVC / Metalic box, single mounting base frame covered with textured/metalic front plate modules erected on / in wall / ceilling as per pipe erected, with necessary Lamp holder/ceilling rose / H.D.Connector as directed.(a) with medium class Rigid PVC pipe and accessories Cat-III

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.24

Item No.26 Providing & Errecting approved make ceilling Fan with double ball bearing ISI mark with codencer 230 Volt A.C. 50 c/s ,1200MM sweep complete having 3 blades with alluminium blades with canopy & 30 Cms down rod erected on existing hook or clamp with 24/0.2, 3 core flexible wire with earthing (Make shall be app. by enginner in charge)

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.24

Item No.27 Supplying and erecting LED indoor fittings with LEDs of wattage 0.2 watt to 0.5 Watt assembled on single MCPCB, with housing used as a heat sink shall be made of thick sheet conforming to IS:513/CRCA polyester powder coated and high U.V. & corrosion resistance with diffuser and/or polycarbonate optics with company mark/name 120 to 300 V,Power Factor more than 0.9, THD < 10 %, CCT 4000 K to 6500K, Uniformity ratio >0.7, Luminaire efficiency> 85 lumens/watt, LED driver efficiency> 85 % CREE / OSRAM / PHILIPS Lumileds / NICHIA / SEOUL/ Bridgelux (U.S.A.) make LED used for luminaire. (Each fitting required LM-79 & LM-80 Certificates)(B) LED Lamps intgra Type, cool white with PC diffuser suitable for B22 LAMP holder(b) 5 to 10 watts

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.24

Item No.28 Point wiring for individual Plug with & Earth wire of FRLS PVC insulated multistrand copper wires, in following type of pipe to be erected concealed in / surface of wall/ ceiling complete with Modular type switch and 5 Pin plug erected on PVC/ Metallic box covered with appropriate front plate modules erected on / in wall/ ceiling as per pipe erected with following type of (I) For 6A Plug with 2-1.5 Sq.mm Cu.wire (a) With medium class rigid PVC Pipe and accessories Cat-III

SPECIFICATION SHALL APPLY AS PER ABOVE ITEM NO.24

Item No.29 Providing & Fixing marble Takti as directed

M-51 - Slab

51.1. - Marble plate shall be white or of other and of best quality as approved by the Engineer in charge.

51.2. Marble plates shall be hard, close, uniform and homogeneous in texture. They shall have even crystalline grain and free from defects and cracks. The surface shall be machine polished to an even and perfect plane surface and edges machine cut true and square. The rear face shall be rough to provide key for the mortar.

51.3. - Marble plates with natural veins, if selected shall have to be laid as per the pattern given by the Engineer in charge. Size of the Marble plate shall be minimum. 600 mm. x 450 mm. and preferably 600 mm. x 600 mm. However smaller sizes will be allowed to be used to the extent of maintaining required pattern.

51.4. The Marble plate shall not be thinner than the specified thickness at its thinnest part A few specimen of finished Marble plate to be used shall be deposited by the Contractor in the officer for reference.

51.5. Except as above the - Marble plate shall conform to I.S. 1130-1969.

51.6 Rate includes carving the letters of scheme as directed for One No.

*******THE END*******

IS : 1948 - 1981
(Reaffirmed 1986)

Indian Standard

SPECIFICATION FOR ALUMINIUM DOORS, WINDOWS AND VENTILATORS

Ninth Reprint JANUARY 1998
(Incorporating Amendment No. 1)

UDC 69'028 : 691'771

© Copyright 1973

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

Indian Standard

SPECIFICATION FOR ALUMINIUM DOORS, WINDOWS AND VENTILATORS

Doors, Windows and Building Furniture Sectional Committee, BDC 11

<i>Chairman</i>	<i>Representing</i>
SHRI D. P. ASAR	Sunderdas & Co, Bombay
<i>Members</i>	
SHRI S. H. ABHYANKAR	Central Public Works Department
SHRI AKSHOY BOSE	Ballardie Thompson & Matthews Ltd, Calcutta
SHRI AMIYA MADHOB CHAKI	Calcutta Cabinet Makers' & Furnishers' Association, Calcutta
SHRI R. K. CHARI	Indian Aluminium Co Ltd, Calcutta
SHRI K. SRINIVAS (<i>Alternate</i>)	Man Industrial Corporation Ltd, Jaipur
SHRI M. C. GANDHI	
SHRI K. R. ANANTHASWAMY (<i>Alternate</i>)	Hind Construction Co Ltd, Calcutta
ENGINEER INCHARGE, WOOD WORKS DEPARTMENT (<i>Alternate</i>)	Godrej & Boyce Manufacturing Co Ltd, Bombay
SHRI K. M. GUPTA	Central Public Works Department
SHRI M. J. JAL	
SHRI S. K. JOGLEKAR	Bombay State Road Transport Corporation, Bombay
SHRI V. M. PUNDLIK (<i>Alternate</i>)	National Buildings Organization (Ministry of Works, Housing & Supply)
SHRI L. S. LULLA	
SHRI J. N. MULLAN (<i>Alternate</i>)	Forest Research Institute & Colleges, Dehra Dun
SHRI C. P. MALIK	Hindustan Housing Factory Private Ltd, New Delhi
SHRI SHRI KRISHNA (<i>Alternate</i>)	Hopes Metals Windows (India) Ltd, Calcutta
CAPT N. J. MASANI	Directorate General of Health Services (Ministry of Health)
SHRI R. P. MHATRE	The Indian Institute of Architects, Bombay
SHRI S. K. MULLICK	
REPRESENTATIVE	Research, Designs & Standards Organization (Ministry of Railways)
SHRI J. D. SHASTRI	Plywood Products, Sitapur
SHRI C. D. SHARMA (<i>Alternate</i>)	
SHRI N. B. SHROFF	Director, ISI (<i>Ex-officio Member</i>)
SHRI H. THOMSON	
SHRI G. W. M. WHITTLE (<i>Alternate</i>)	
DR H. C. VISVESVARAYA,	
Deputy Director (Bldg)	
	<i>Secretary</i>
	SHRI D. AJITHA SIMHA
	Assistant Director (Bldg), ISI

Metal and Composite Doors and Windows Subcommittee, BDC 11:2

<i>Convener</i>	
SHRI M. J. JAL	Godrej & Boyce Manufacturing Co Ltd, Bombay
<i>Members</i>	
SHRI R. K. CHARI	Indian Aluminium Co Ltd, Calcutta
SHRI K. SRINIVAS (<i>Alternate</i>)	Man Industrial Corporation Ltd, Jaipur
SHRI M. C. GANDHI	
SHRI P. H. G. MENON (<i>Alternate</i>)	Hopes Metals Windows (India) Ltd, Calcutta
SHRI S. K. MULLICK	Research, Designs & Standards Organization (Ministry of Railways)
SHRI N. B. SHROFF	

Indian Standard

SPECIFICATION FOR ALUMINIUM DOORS, WINDOWS AND VENTILATORS

0. FOREWORD

0.1 This Indian Standard was adopted by the Indian Standards Institution on 2 November 1961, after the draft finalized by the Doors, Windows and Building Furniture Sectional Committee had been approved by the Building Division Council.

0.2 This Specification is an adjunct to IS: 1038-1957 Specification for Steel Doors, Windows and Ventilators, which covers requirements of steel doors, windows and ventilators for use in buildings. With the increasing use of aluminium alloy extruded sections in the manufacture of aluminium doors, windows and ventilators, it was felt that the requirements of such units be covered in a separate standard.

0.3 The sizes of aluminium doors, windows and ventilators and other requirements and details are identical to those of steel doors, windows and ventilators unless otherwise indicated.

0.4 The Sectional Committee responsible for the preparation of this standard has taken into consideration the views of producers, consumers and technologists and has related the standard to the manufacturing and trade practices followed in the country in this field. Due weightage has also been given to the need for international co-ordination among standards prevailing in different countries of the world in this field.

0.5 This standard is one of a series of Indian Standards on metal doors and windows. Other

standards in the series are:

- *IS: 1038-1957 SPECIFICATION FOR STEEL DOORS, WINDOWS AND VENTILATORS
- IS: 1081-1960 CODE OF PRACTICE FOR FIXING AND GLAZING OF METAL (STEEL AND ALUMINIUM) DOORS, WINDOWS AND VENTILATORS
- IS: 1361-1959 SPECIFICATION FOR STEEL WINDOWS FOR INDUSTRIAL BUILDINGS
- IS: 1949-1961 SPECIFICATION FOR ALUMINIUM WINDOWS FOR INDUSTRIAL BUILDINGS

0.6 Wherever a reference to any Indian Standard appears in this specification, it shall be taken as a reference to the latest version of the standard.

0.7 Metric system has been adopted in India and all quantities and dimensions appearing in this standard have been given in this system.

0.8 For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test, shall be rounded off in accordance with IS: 2-1960 Rules for Rounding Off Numerical Values (*Revised*). The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

0.9 This standard is intended chiefly to cover the technical provisions relating to aluminium doors, windows and ventilators, and it does not include all the necessary provisions of a contract.

*Since revised.

1. SCOPE

1.1 This standard covers the requirements regarding material, fabrication and dimensions of aluminium doors, windows and ventilators manufactured from extruded aluminium alloy sections of standard sizes and designs, complete with fittings, ready for being fixed into the buildings. This standard does not cover the requirements for industrial doors, windows and ventilators.

2. TERMINOLOGY

2.1 For the purpose of this standard, the components of doors, windows and ventilators shall be defined as illustrated in Fig. 1.

3. HANDING

3.1 The side-hung opening position of all doors and windows shall be said to be right-hand or left hand according to the side on which they are hinged looking from the inside (*see Fig. 2*).

4. STANDARD SIZES, TOLERANCES AND DESIGNATIONS

4.1 Sizes — The types and the overall sizes of aluminium doors, windows and ventilators shall be as given in Fig. 3 (*see P 4*).

4.1.1 The dimensions shown are overall heights and widths to the outside of frames of aluminium doors, windows and ventilators. These sizes are derived after allowing 1.25 cm clearance on all

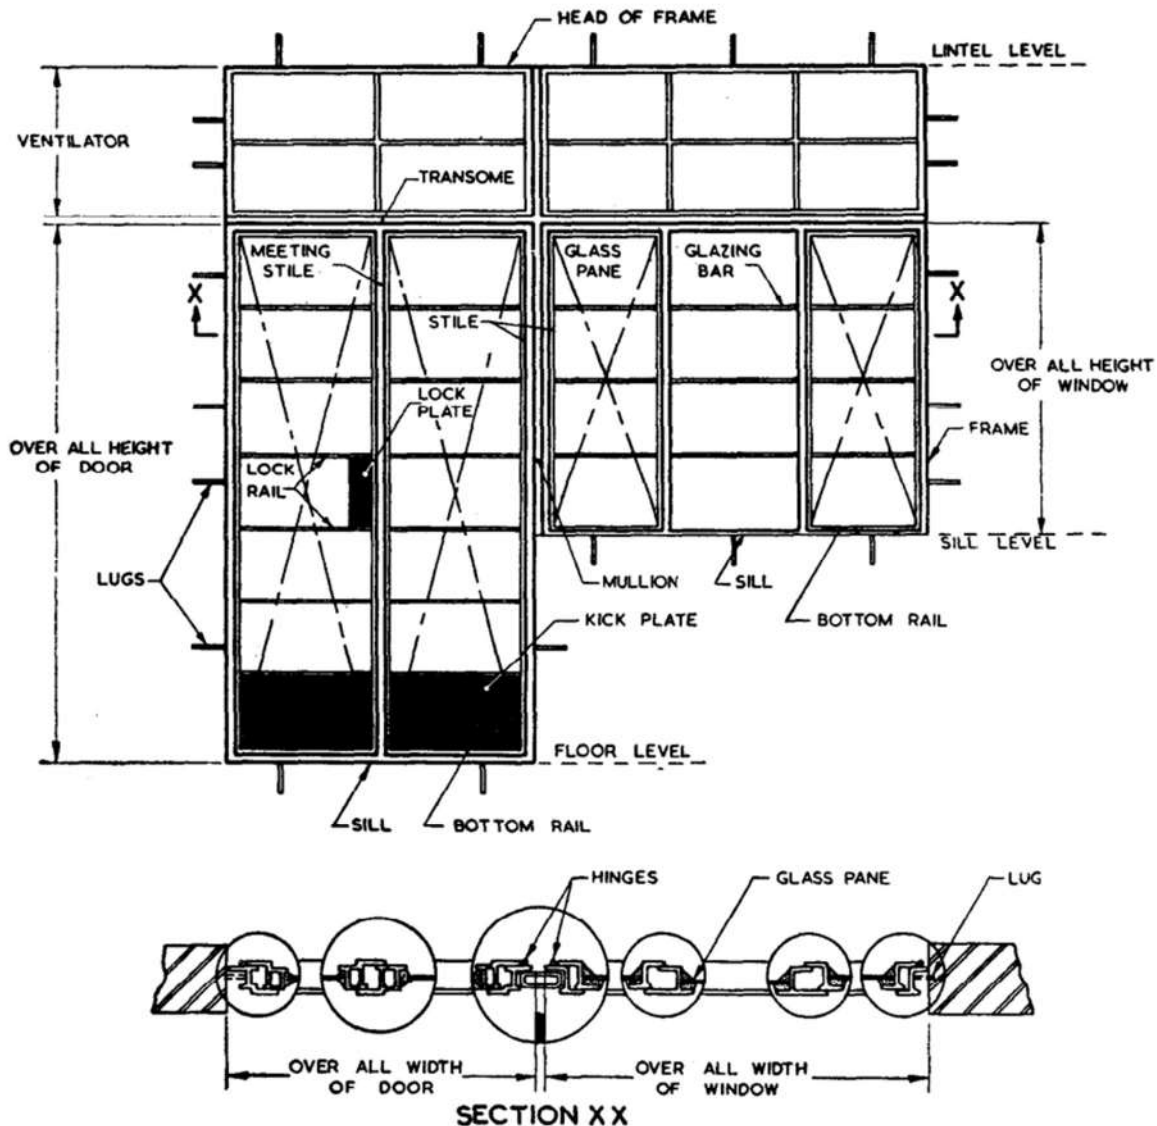


FIG. 1 TERMINOLOGY FOR ALUMINIUM DOORS, WINDOWS AND VENTILATORS

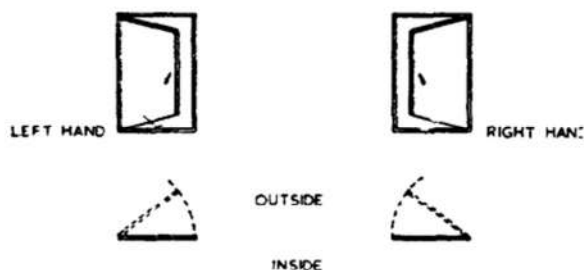



FIG. 2 HANDING OF DOORS AND WINDOWS

the four sides for the purpose of fitting the doors, windows or ventilators into modular openings (see Fig. 4 on P 5).

4.2 Tolerances — The sizes for door, window or ventilator frames shall not vary by more than ± 1.5 mm.

4.3 Designation — Doors, windows and ventilators shall be designated by symbols denoting their width, type and height in succession in the following manner:

- a) *Width* — It shall be indicated by the number of modules in the width of opening.
- b) *Type* — It shall be indicated by the following letters of alphabet:
 - C = Centre-hung shutters,
 - F = Fixed-glass panes,
 - H = With horizontal glazing bars,
 - N = Without horizontal glazing bars,
 - S = Side-hung shutters, and
 - T = Top-hung shutters.

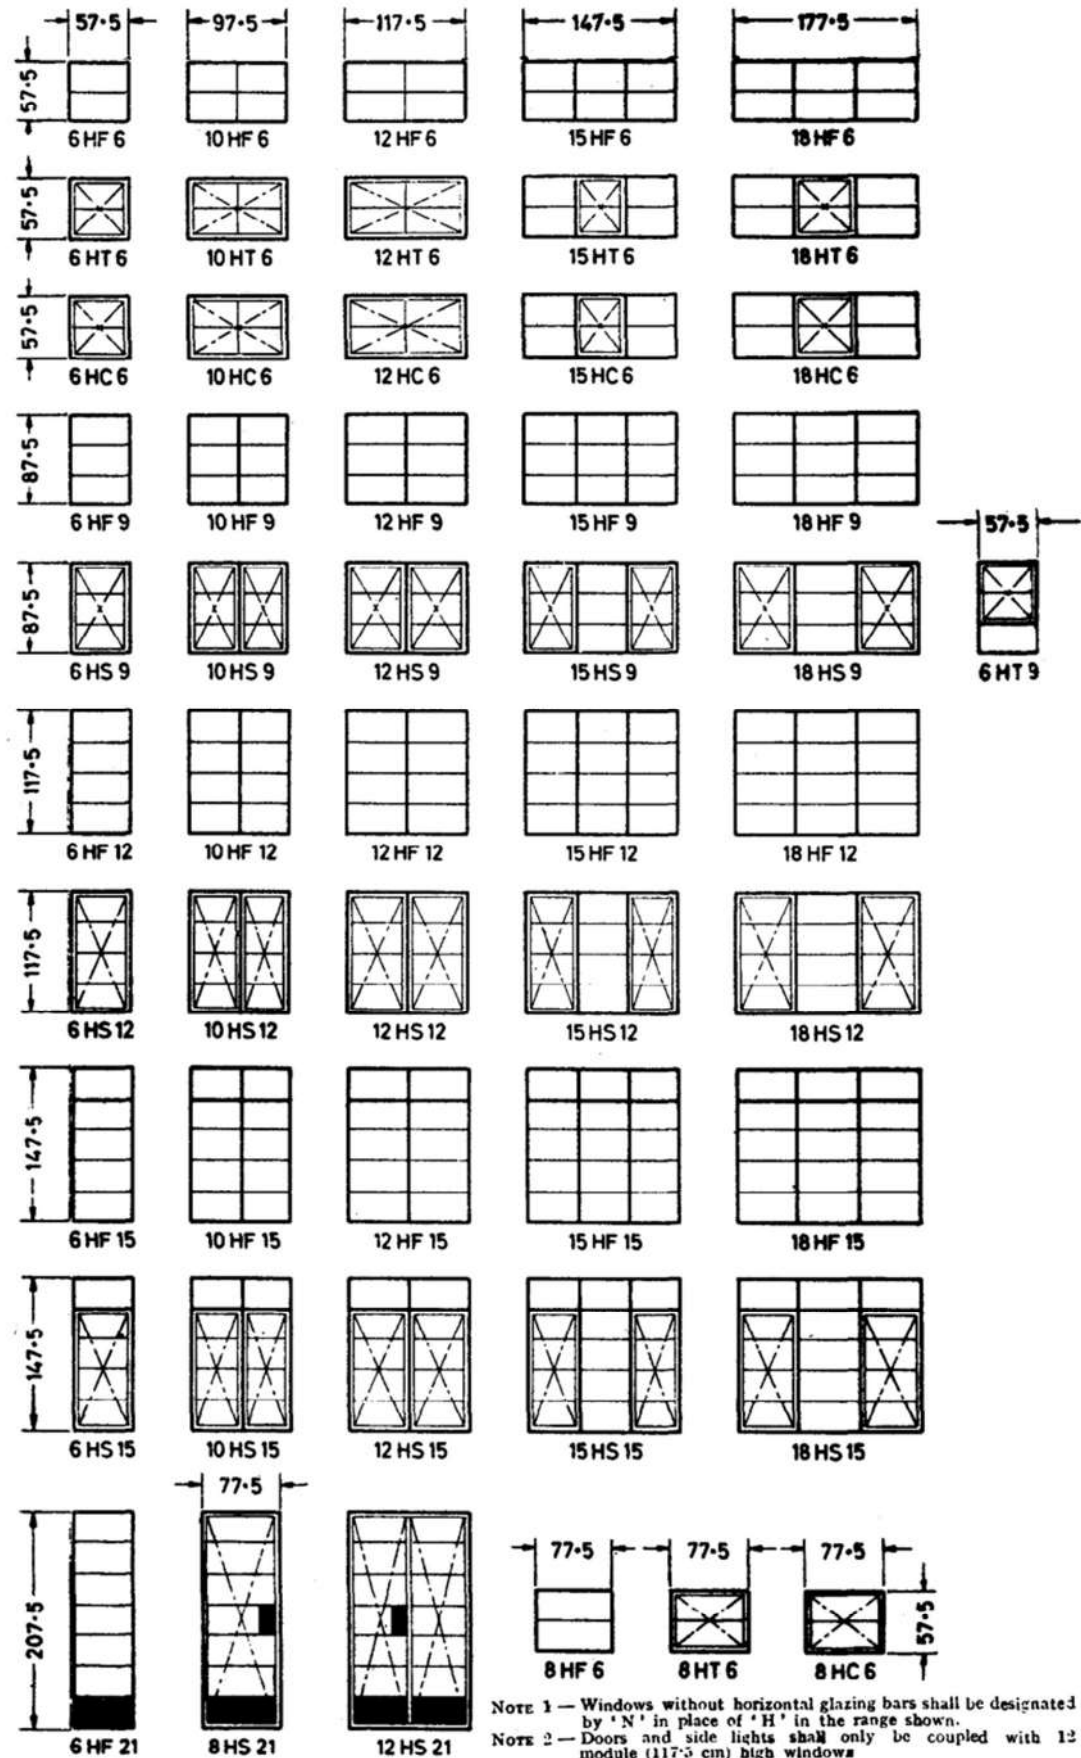

All dimensions in centimetres.

FIG. 3 TYPES AND SIZE OF ALUMINIUM DOORS, WINDOWS AND VENTILATORS

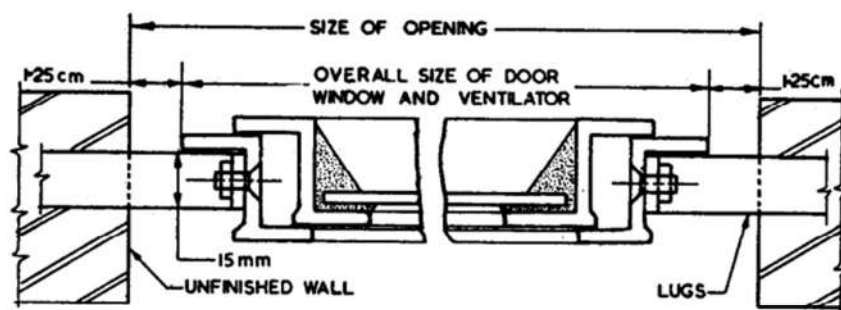


FIG. 4 SIZE OF ALUMINIUM DOORS, WINDOWS OR VENTILATORS IN RELATION TO SIZE OF OPENING

- c) *Height* — It shall be indicated by the number of modules in the height of opening.

Example:

A window of a width of 10 modules (97.5 cm) and height 9 modules (87.5 cm), having horizontal glazing bars and side-hung shutters is designated by 10HS9.

4.3.1 Composite doors, windows or ventilators shall be designated in the following manner:

- A 12 module wide and 21 module high horizontally glazed side-hung door coupled on its two sides with two side-hung horizontally glazed windows 6 module wide and 12 module high is designated by 6HS12/12HS21/6HS12.
- Two 10 module wide and 12 module high horizontally glazed side-hung windows coupled side by side with two fixed glass pane ventilators at top, each 10 module wide and 6 module high, is designated by

10HF6/10HF6
10HS12/10HS12

5. MATERIALS

5.1 Aluminium Alloy Extruded Sections

5.1.1 Aluminium alloy used in the manufacture of extruded window sections shall correspond to IS Designation HE9-WP of *IS: 733-1956 Specification for Wrought Aluminium and Aluminium Alloys, Bars, Rods and Sections (For General Engineering Purposes). Hollow aluminium alloy sections used shall conform to IS Designation HV9-WP of *IS: 1285-1958 Specification for Wrought Aluminium and Aluminium Alloys, Extruded Round Tube and Hollow Sections (For General Engineering Purposes).

5.1.2 Dimensions and weight per metre run of the extruded sections shall be as given in Fig. 5 (see P 6).

5.2 Coupling Sections — Aluminium alloy coupling sections used shall conform to IS Designation HV9-WP of *IS: 1285-1958 Specification for Wrought Aluminium and Aluminium

Alloys, Extruded Round Tube and Hollow Sections (For General Engineering Purposes). They shall conform to the dimensions shown in Fig. 5.

5.3 Glass Panes — Glass panes shall weigh at least 7.5 kg/m² and shall be free from flaws, specks, or bubbles. All panes shall have properly squared corners and straight edges. The sizes of the glass panes for use in doors, windows and ventilators shall be as given in Table I.

NOTE — The metal doors and windows industry has followed the practice of the glazing industry in specifying size of glass. Accordingly, in the metal doors and windows, the practice hitherto has been to specify the height first and the width afterwards. In the building industry and in the case of timber doors and windows the practice is to specify width first and height afterwards. The Committee responsible for the preparation of this standard has considered it desirable to unify the practice in this regard and has adopted the building industry practice, that is, to specify width first and height afterwards.

5.4 Screws — Screw threads of machine screws used in the manufacture of aluminium doors, windows and ventilators shall conform to the requirements of *IS: 1362-1959 Dimensions for Screw Threads for General Purposes (Diameter Range 0.25 to 39 mm). Other threads shall be permissible if agreed to between the purchaser and the vendor.


6. FABRICATION

6.1 Frames — Frames shall be square and flat, the corners of the frame being fabricated to a true right angle. Both the fixed and opening frames shall be constructed of sections which have been cut to length, mitred and welded at the corners. Where hollow sections are used with welded joints, argon-arc welding or flash butt welding shall be employed (gas welding or brazing not to be done). Subdividing bars of units shall be tenoned and riveted into the frame.

6.1.1 The location of the parts of the doors, windows and ventilators for which details of fabrication are described under **6.1.2** are indicated in Fig. 6 (see P 9).

*Since revised.

*Since revised and withdrawn.

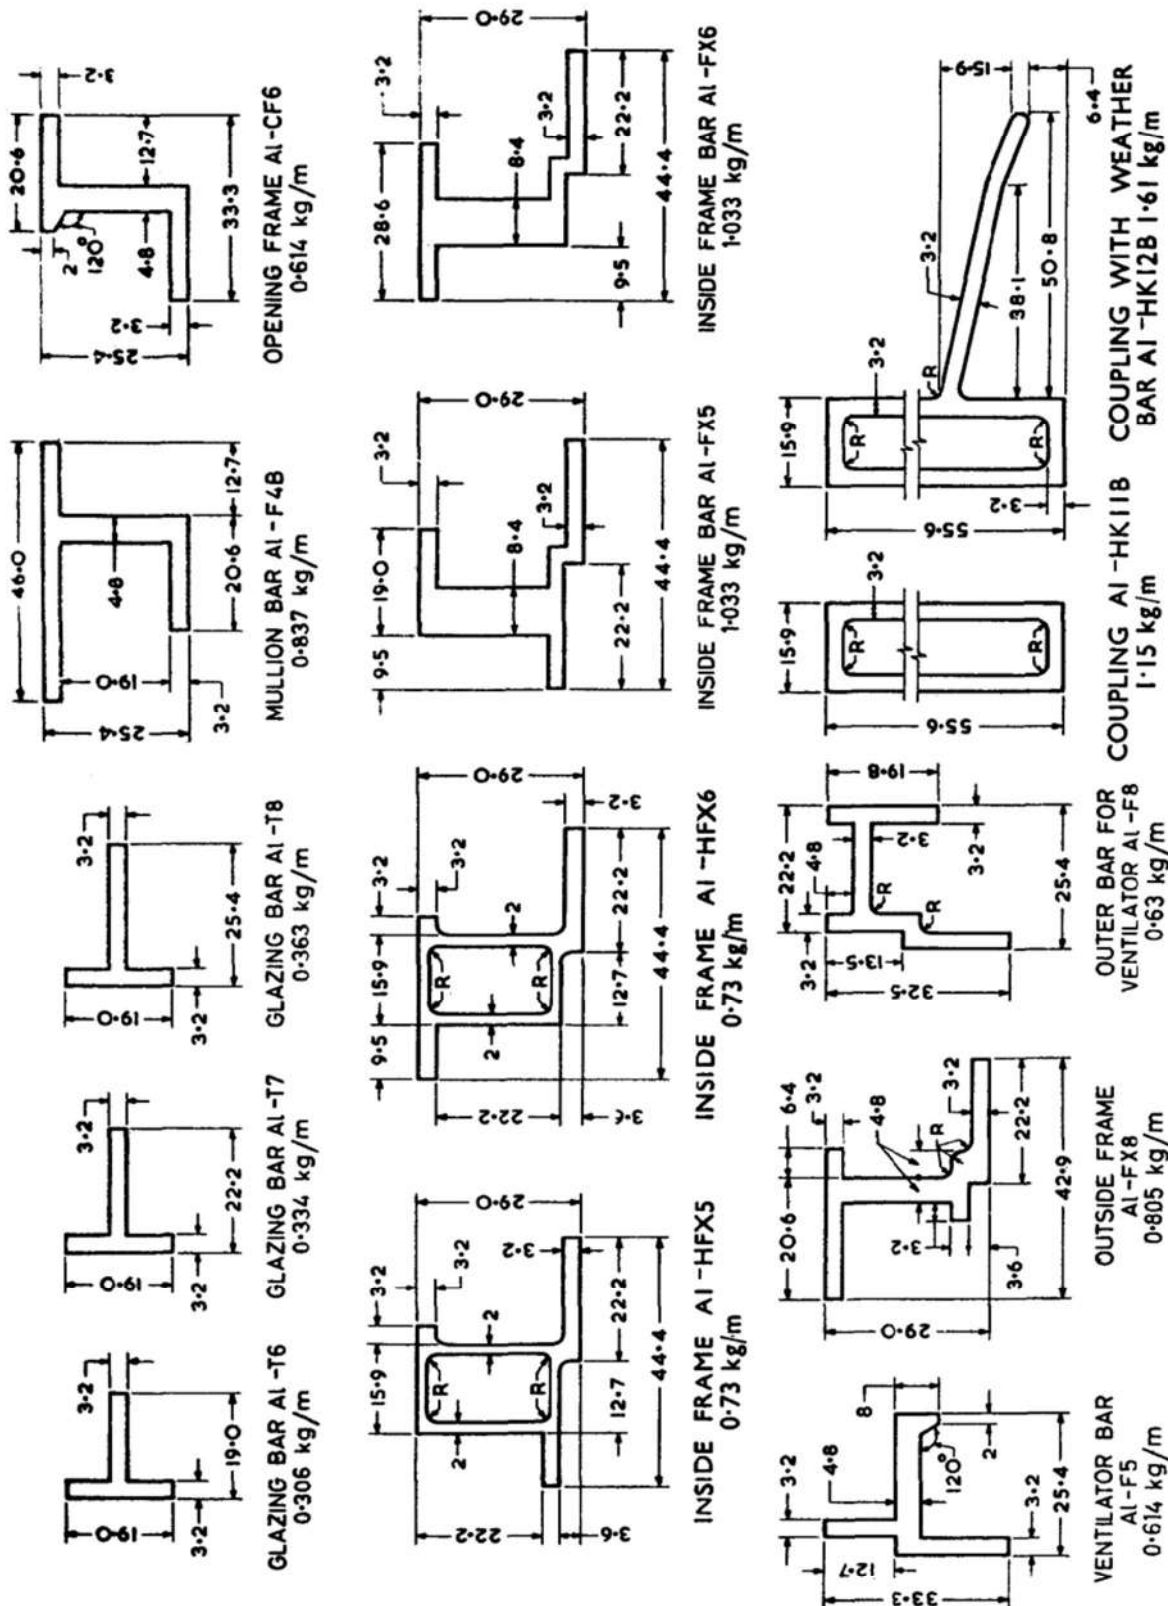

NOTE 1 — All radii $R=1.6$ mm

NOTE 2 — The weights of sections per metre length as indicated are nominal.

All dimensions in millimetres.

FIG. 5 EXTRUDED ALUMINIUM SECTIONS FOR DOORS, WINDOWS AND VENTILATORS

TABLE I GLASS SIZES
(CLEARANCE ALLOWED)

(Clause 5.3)

DESIGNATION	QUANTITY	GLASS SIZE Width × Height cm
No Glazing Bar Fixed Type		
6NF6	1	53.0 × 53.0
10NF6	2	45.0 × 53.0
12NF6	2	55.0 × 53.0
15NF6	{ 2 1	45.0 × 53.0 47.5 × 53.0
18NF6	{ 2 1	55.0 × 53.0 57.5 × 53.0
6NF9	1	53.0 × 83.0
10NF9	2	45.0 × 83.0
12NF9	2	55.0 × 83.0
15NF9	{ 2 1	45.0 × 83.0 47.5 × 83.0
18NF9	{ 2 1	55.0 × 83.0 57.5 × 83.0
6NF12	1	53.0 × 113.0
10NF12	2	45.0 × 113.0
12NF12	2	55.0 × 113.0
15NF12	{ 2 1	45.0 × 113.0 47.5 × 113.0
18NF12	{ 2 1	55.0 × 113.0 57.5 × 113.0
6NF15	{ 1 1	53.0 × 27.0 53.0 × 113.0
10NF15	{ 2 2	45.0 × 27.0 45.0 × 113.0
12NF15	{ 2 2	55.0 × 27.0 55.0 × 113.0
15NF15	{ 2 1 2 1	45.0 × 27.0 47.5 × 27.0 45.0 × 113.0 47.5 × 113.0
18NF15	{ 2 1 2 1	55.0 × 27.0 57.5 × 27.0 55.0 × 113.0 57.5 × 113.0
8NF6	1	73.0 × 53.0
6NF21	{ 1 1 1	53.0 × 84.5 53.0 × 27.5 53.0 × 56.0

No Glazing Bar Top-Hung Type

6NT6	1	50.0 × 50.0
10NT6	2	44.5 × 50.0
12NT6	2	54.5 × 50.0
15NT6	{ 2 1	45.0 × 53.0 45.5 × 50.0
18NT6	{ 2 1	55.0 × 53.0 54.5 × 50.0
8NT6	1	70.0 × 50.0
6NT9	{ 1 1	50.0 × 51.5 53.0 × 27.5

(Contd)

TABLE I GLASS SIZES
(CLEARANCE ALLOWED) — Contd

DESIGNATION	QUANTITY	GLASS SIZE Width × Height cm
No Glazing Bar Centre-Hung Type		
6NC6	1	46.0 × 46.0
10NC6	2	42.5 × 46.0
12NC6	2	52.5 × 46.0
15NC6	{ 2 1	45.0 × 53.0 43.5 × 46.0
18NC6	{ 2 1	55.0 × 53.0 53.5 × 46.0
8NC6	1	66.0 × 46.0
No Glazing Bar Side-Hung Type		
6NS9	1	50.0 × 80.0
10NS9	2	43.5 × 80.0
12NS9	2	52.5 × 80.0
15NS9	{ 2 1	43.5 × 80.0 47.5 × 83.0
18NS9	{ 2 1	52.5 × 80.0 57.5 × 83.0
6NS12	1	50.0 × 110.0
10NS12	2	43.5 × 110.0
12NS12	2	52.5 × 110.0
15NS12	{ 2 1	43.5 × 110.0 47.5 × 113.0
18NS12	{ 2 1	52.5 × 110.0 57.5 × 113.0
6NS15	{ 1 1	53.0 × 27.0 50.0 × 110.0
10NS15	{ 2 2	45.0 × 27.0 43.5 × 110.0
12NS15	{ 2 2	55.0 × 27.0 52.5 × 110.0
15NS15	{ 2 1 2 1	45.0 × 27.0 47.5 × 27.0 43.5 × 110.0 47.5 × 113.0
18NS15	{ 2 1 2 1	55.0 × 27.0 57.5 × 27.0 52.5 × 110.0 57.5 × 113.0
8NS21	{ 1 1 1	66.0 × 81.0 56.0 × 27.5 66.0 × 56.0
12NS21	{ 2 2 1 1	50.5 × 81.0 50.5 × 56.0 50.5 × 27.5 40.5 × 27.5
Horizontal Glazing Bar Fixed Type		
6HF6	2	53.0 × 26.0
10HF6	4	45.0 × 26.0
12HF6	4	55.0 × 26.0
15HF6	{ 4 2	45.0 × 26.0 47.5 × 26.0

(Contd)


TABLE I GLASS SIZES
(CLEARANCE ALLOWED) — *Contd*

DESIGNATION	QUANTITY	GLASS SIZE Width × Height cm
Horizontal Glazing Bar Fixed Type		
18HF6	{ 4 2	55.0 × 26.0 57.5 × 26.0
6HF9	{ 2 1	53.0 × 27.5 53.0 × 26.0
10HF9	{ 4 2	45.0 × 27.5 45.0 × 26.0
12HF9	{ 4 2	55.0 × 27.5 55.0 × 26.0
15HF9	{ 4 2 2 1	45.0 × 27.5 45.0 × 26.0 47.5 × 27.5 47.5 × 26.0
18HF9	{ 4 2 2 1	55.0 × 27.5 55.0 × 26.0 57.5 × 27.5 57.5 × 26.0
6HF12	4	53.0 × 27.5
10HF12	8	45.0 × 27.5
12HF12	8 ^a	55.0 × 27.5
15HF12	{ 8 4	45.0 × 27.5 47.5 × 27.5
18HF12	{ 8 4	55.0 × 27.5 57.5 × 27.5
6HF15	{ 1 4	53.0 × 27.0 53.0 × 27.5
10HF15	{ 2 8	45.0 × 27.0 45.0 × 27.5
12HF15	{ 2 8	55.0 × 27.0 55.0 × 27.5
15HF15	{ 2 1 8 4	45.0 × 27.0 47.5 × 27.0 45.0 × 27.5 47.5 × 27.5
18HF15	{ 2 1 8 4	55.0 × 27.0 57.5 × 27.0 55.0 × 27.5 57.5 × 27.5
8HF6	2	73.0 × 26.0
6HF21	6	53.0 × 27.5
Horizontal Glazing Bar Top-Hung Type		
6HT6	2	50.0 × 24.5
10HT6	4	44.5 × 24.5
12HT6	4	54.5 × 24.5
15HT6	{ 4 2	45.0 × 26.0 44.5 × 24.5
18HT6	{ 4 2	55.0 × 26.0 54.5 × 24.5
6HT9	{ 1 1 1	50.0 × 26.0 50.0 × 24.5 53.0 × 27.5
8HT6	2	70.0 × 24.5
6HC6	2	46.0 × 22.5

TABLE I GLASS SIZES
(CLEARANCE ALLOWED) — *Contd*

DESIGNATION	QUANTITY	GLASS SIZE Width × Height cm
Horizontal Glazing Bar Top-Hung Type		
10HC6	4	42.5 × 22.5
12HC6	4	52.5 × 22.5
15HC6	{ 4 2	45.0 × 26.0 43.5 × 22.5
18HC6	{ 4 2	55.0 × 26.0 53.5 × 22.5
8HC6	2	66.0 × 22.5
Horizontal Glazing Bar Side-Hung Type		
6HS9	3	50.0 × 26.0
10HS9	6	43.5 × 26.0
12HS9	6	52.5 × 26.0
15HS9	{ 6 2 1	43.5 × 26.0 47.5 × 27.5 47.5 × 26.0
18HS9	{ 6 2 1	52.5 × 26.0 57.5 × 27.5 57.5 × 26.0
6HS12	{ 2 2	50.0 × 26.0 50.0 × 27.5
10HS12	{ 4 4	43.5 × 26.0 43.5 × 27.5
12HS12	{ 4 4	52.5 × 26.0 52.5 × 27.5
15HS12	{ 4 4 4	43.5 × 26.0 43.5 × 27.5 47.5 × 27.5
18HS12	{ 4 4 4	52.5 × 26.0 52.5 × 27.5 57.5 × 27.5
6HS15	{ 1 2 2	53.0 × 27.0 50.0 × 26.0 50.0 × 27.5
10HS15	{ 2 4 4	45.0 × 27.0 43.5 × 26.0 43.5 × 27.5
12HS15	{ 2 4 4	55.0 × 27.0 52.5 × 26.0 52.5 × 27.5
15HS15	{ 2 1 4 4 4	45.0 × 27.0 47.5 × 27.0 43.5 × 26.0 43.5 × 27.5 47.5 × 27.5
18HS15	{ 2 1 4 4 4	55.0 × 27.0 57.5 × 27.0 52.5 × 26.0 52.5 × 27.5 57.5 × 27.5
8HS21	{ 1 4 1	66.0 × 24.0 66.0 × 27.5 56.0 × 27.5
12HS21	{ 2 9 1	50.5 × 24.0 50.5 × 27.5 40.5 × 27.5

(Contd)

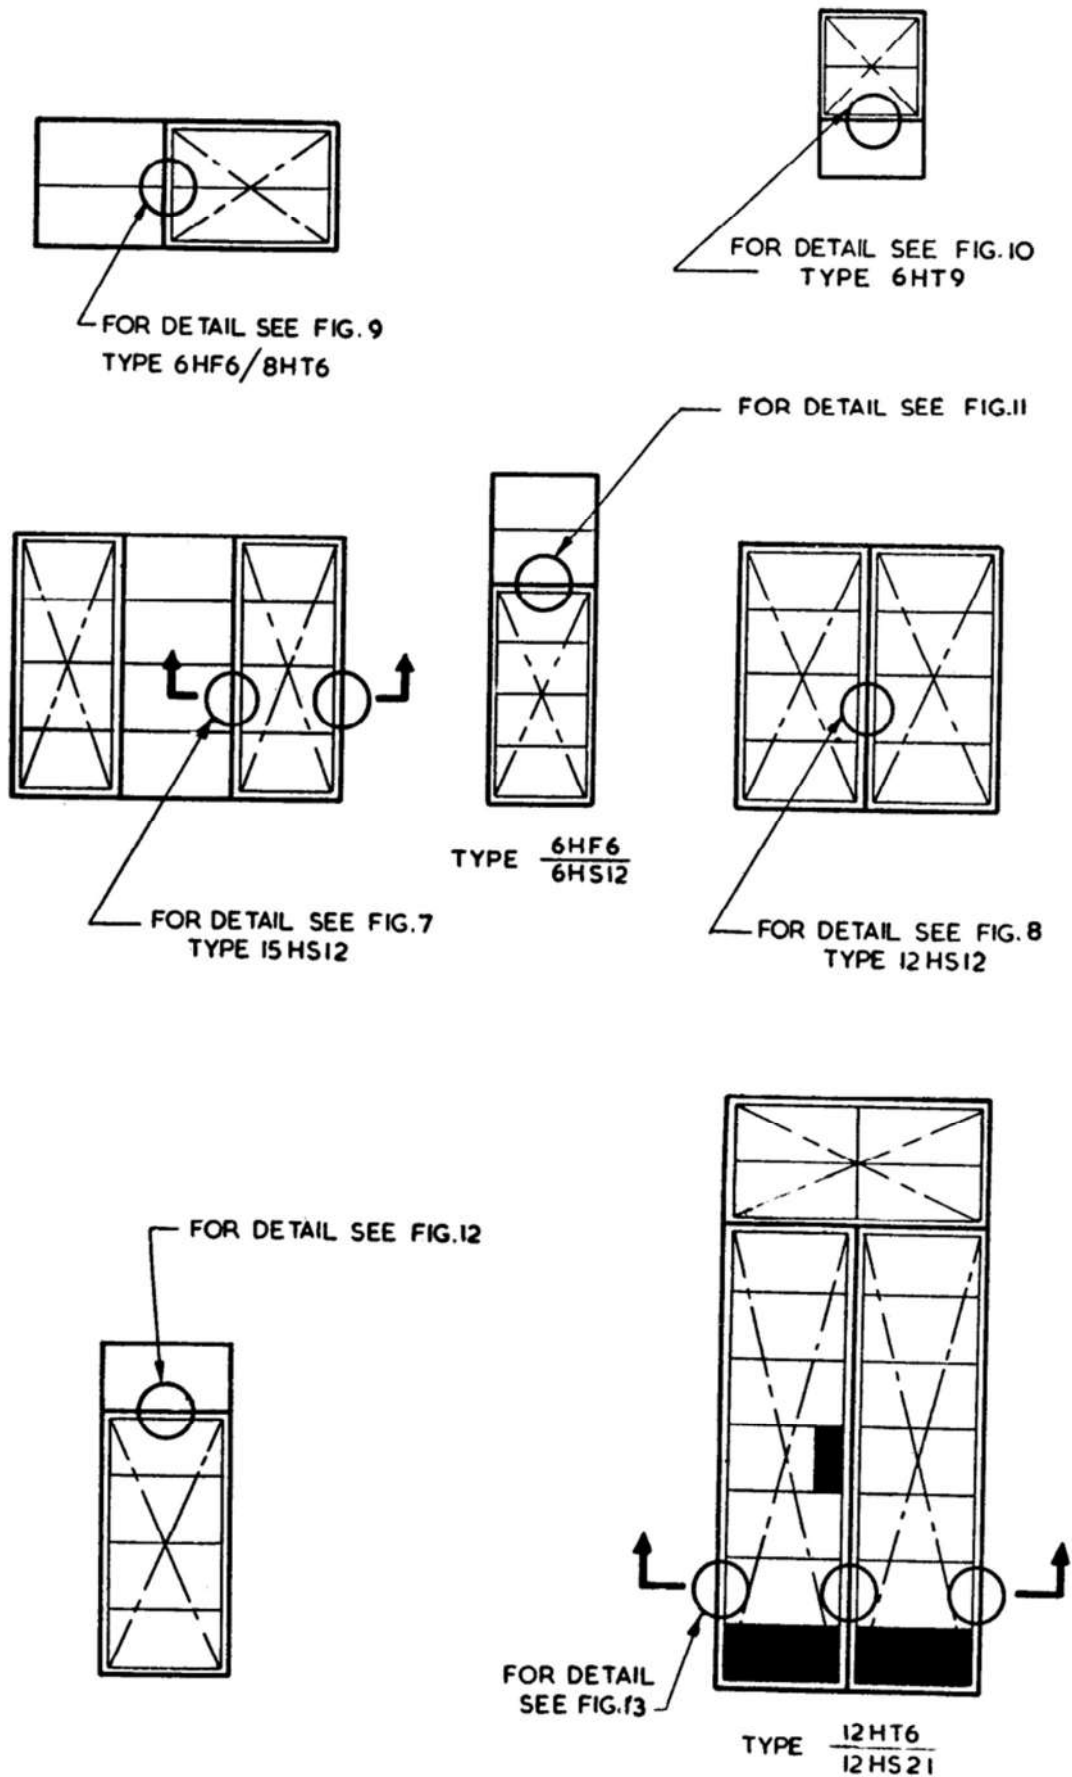

TYPE 6HS15

FIG. 6 LOCATION OF PARTS OF ALUMINIUM DOORS, WINDOWS AND VENTILATORS FOR WHICH DETAILS ARE SHOWN




FIG. 7 MULLION WITH FIXED GLASS ON ONE SIDE AND SIDE-HUNG ON OTHER SIDE




FIG. 8 MULLION WITH SIDE-HUNG SHUTTER BOTH SIDES

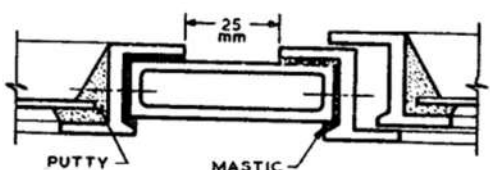


FIG. 9 COUPLING SECTION EXTRUDED FOR COUPLING WINDOWS SIDE BY SIDE




FIG. 10 DETAIL THROUGH BOTTOM OF TOP-HUNG VENTILATOR

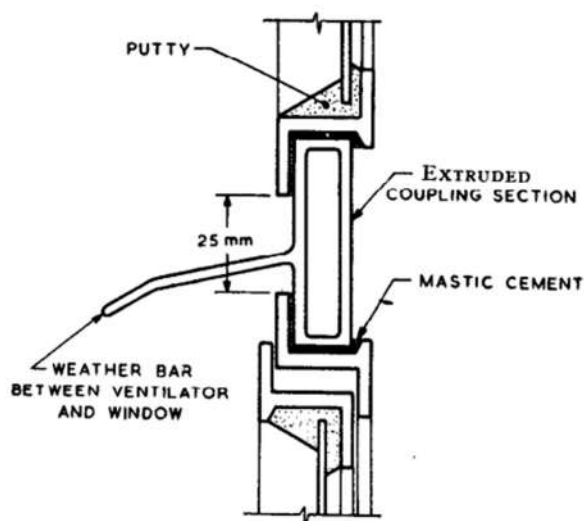


FIG. 11 COUPLING SECTION EXTRUDED HAVING WEATHER BAR FITTED WITH VENTILATORS ON TOP OF WINDOWS

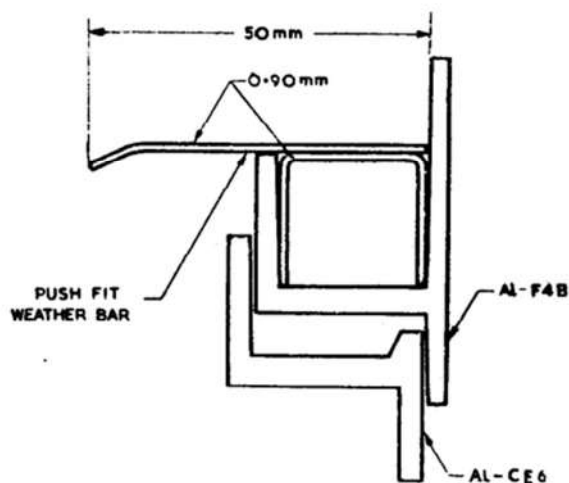


FIG. 12 WEATHER BAR OVER EXTERNAL OPENING SHUTTER WITH FIXED LIGHT ABOVE

6.1.2 Details of construction of doors, windows and ventilators shall be as indicated in Fig. 7 to 13 (see P 10 and 11).

6.2 Side-hung Shutters — For fixing aluminium alloy hinges, slots shall be cut in the fixed frame and the hinges inserted inside and may be riveted to the frame. The hinges shall normally be of the projecting type 67 mm wide (see Fig. 14). The aluminium alloy for cast hinges shall conform to IS Designation A-5-M of IS: 617-1959 Specification for Aluminium and Aluminium Alloy Ingots and Castings for General Engineering Purposes (*Revised*) and for extruded section of hinges to IS Designation HE10-WP or HE30-WP of *IS: 733-1956 Specification for Wrought Aluminium and Aluminium Alloys, Bars, Rods and Sections (For General Engineering Purposes). The pins for hinges shall be of stainless steel of non-magnetic type or of aluminium alloy HR30. Irrespective of hinges being anodized or not, the aluminium alloy pins shall be anodized to a minimum film thickness of 0.025 mm and shall be sealed with oil, wax or lanolin. Non-projecting types of hinges (see Fig. 15) may also be used, where agreed to between the purchaser and the supplier.

6.2.1 Friction hinges may be provided for side-hung shutter windows, in which case peg stay as mentioned under 6.2.3 may not be required. The working principle of the friction hinge is illustrated in Fig. 16 (see P. 12).

6.2.2 The handle for side-hung shutters shall be of cast aluminium conforming to IS Designation A-5-M of IS: 617-1959 Specification for Aluminium and Aluminium Alloy Ingots and Castings for General Engineering Purposes (*Revised*) and mounted on a handle plate welded or riveted to the opening frame in such a way that it could be fixed before the shutter is glazed. The handle should have anodized finish with minimum anodic film thickness of 0.015 mm. The handle shall have a two-point nose which shall engage with an aluminium striking plate on

*Since revised.


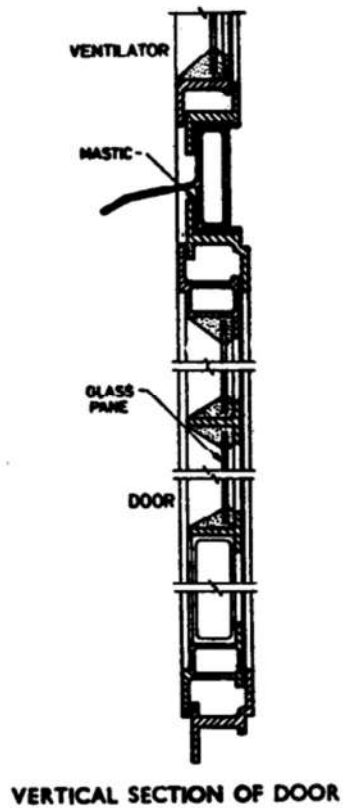


FIG. 13 DETAIL OF ALUMINIUM DOUBLE SHUTTER DOOR

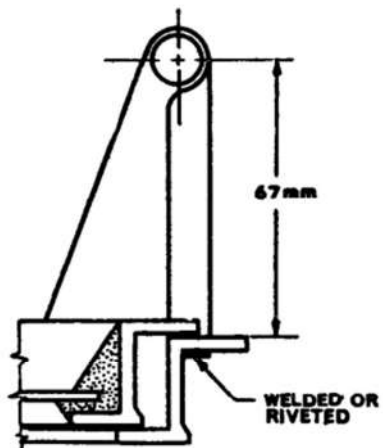


FIG. 14 TYPICAL PROJECTING TYPE HINGE FOR SIDE-HUNG SHUTTER


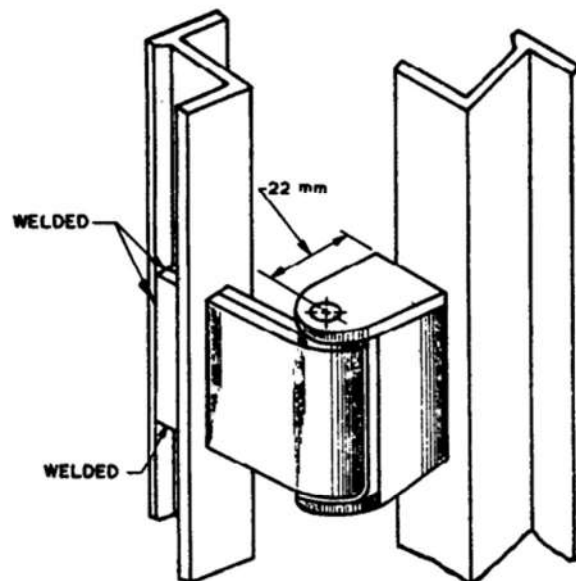


FIG. 15 TYPICAL NON-PROJECTING TYPE HINGE FOR SIDE-HUNG SHUTTER



FIG. 16 ILLUSTRATION SHOWING WORKING PRINCIPLE OF FRICTION HINGES



9 MODULE (87.5 cm)
HIGH WINDOWS


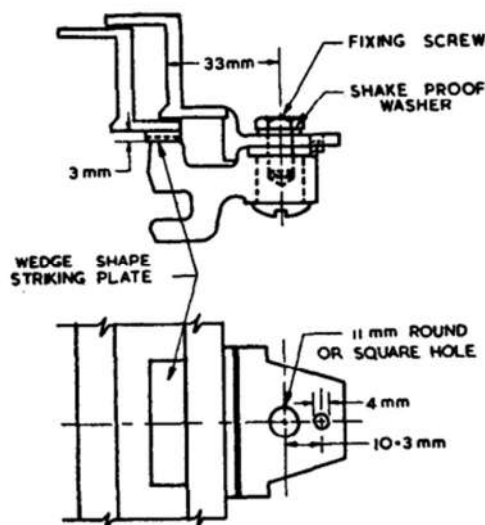


FIG. 17 A TYPICAL HANDLE FOR SIDE-HUNG SHUTTER



12 MODULE (117.5 cm)
HIGH WINDOWS

FIG. 18 POSITION OF HANDLE PLATES IN RELATION TO HEIGHTS OF 'HS' TYPE OF WINDOWS

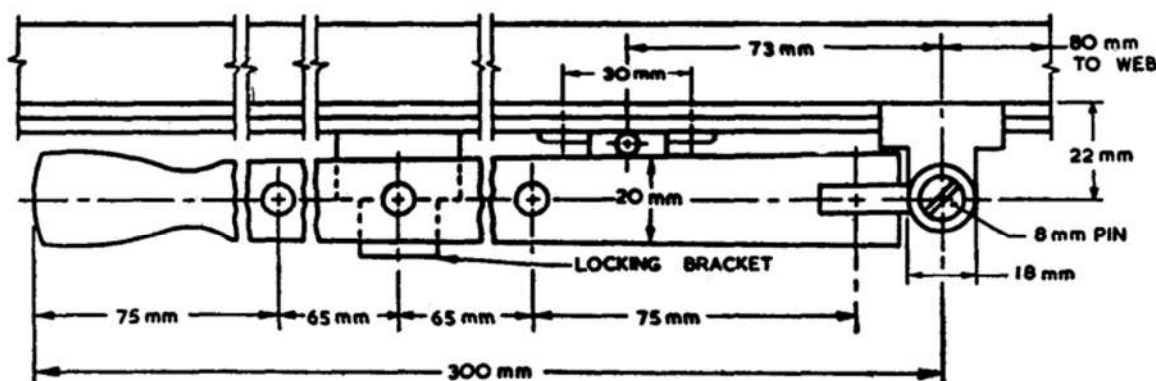


FIG. 19 A TYPICAL PEG STAY FOR SIDE-HUNG SHUTTERS AND TOP-HUNG VENTILATORS

the fixed frame in a slightly open position as well as in a fast position (see Fig. 17 on P 12). The height of the handles in each type of side-hung shutters shall be fixed in approximate positions as indicated in Fig. 18 (see P 12).

6.2.3 The peg stay shall be either of cast aluminium conforming to IS Designation A-5-M of IS: 617-1959 Specification for Aluminium and

Aluminium Alloy Ingots and Castings for General Engineering Purposes (*Revised*), or folded from IS Designation NS4 aluminium alloy sheet conforming to *IS: 737-1955 Specification for Wrought Aluminium and Aluminium Alloys, Sheet and Strip (For General Engineering Purposes). It shall be 300 mm long, complete with peg and lock-

* Second revision in 1974.

ing bracket (see Fig. 19 on P. 12). The stay shall have holes for keeping the shutter open in three different positions. The peg and locking bracket shall be riveted or welded to the fixed frame.

6.2.4. Alternatively, and if specifically required by the purchaser, side-hung shutters may be fitted with an internal removable fly screen of 0.375 mm wire and equivalent to IS Sieve 100 in a 0.900 mm aluminium alloy sheet conforming to IS Designation NS3-1/2H of IS: 737-1955 Specification for Wrought Aluminium and Aluminium Alloys, Sheet and Strip (For General Engineering Purposes), applied to the outer frame of the shutter by cast or extruded

*Second revision in 1974.




FIG. 20 DETAIL THROUGH JAMB SHOWING TURNBUCKLE

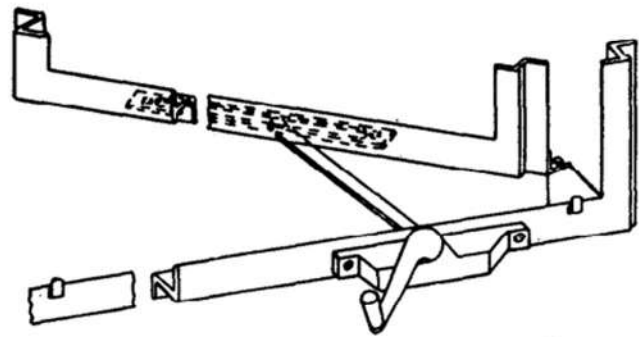


FIG. 21 TYPICAL ROTOR OPERATOR FOR SIDE-HUNG SHUTTERS FITTED WITH FLY SCREEN




FIG. 22 DETAILS OF HORIZONTAL CENTRE-HUNG VENTILATOR

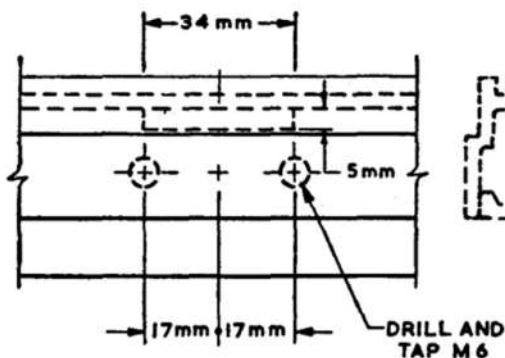


FIG. 23 SPRING CATCH FOR CENTRE-HUNG VENTILATOR

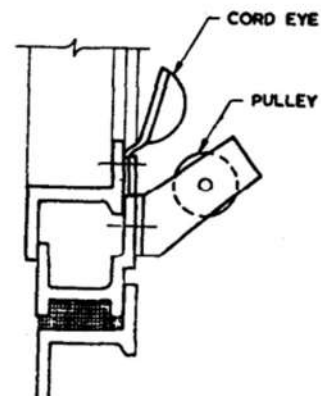
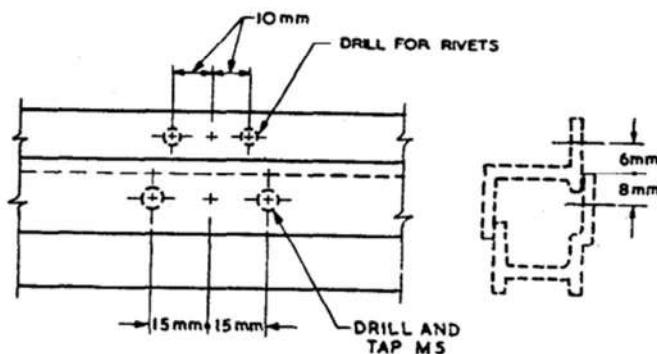
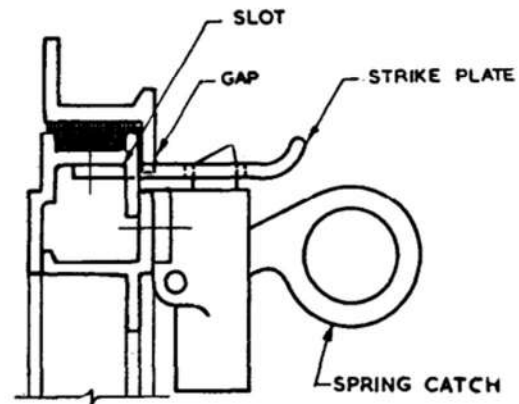


FIG. 24 CORD EYE AND PULLEY ARRANGEMENT FOR CENTRE-HUNG VENTILATOR

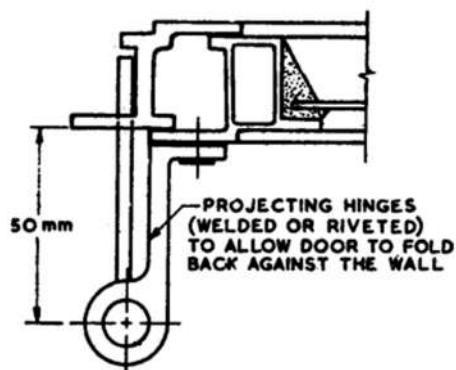


FIG. 25 TYPICAL PROJECTING TYPE HINGE FOR DOOR




FIG. 26 TYPICAL NON-PROJECTING TYPE HINGE FOR DOOR

aluminium alloy turn-buckle at the jambs (see Fig. 20) and by aluminium or plated bronze (gunmetal) shoes at the sill to allow of the screen being readily removed; and with a rotor operator at the sill to permit the operation of the shutter through an angle of 90° (see Fig. 21). On fly-screened shutters the peg stay is omitted and the normal handle shall be replaced by a locking handle to hold the shutter in the fast position.

6.3 Top-Hung Ventilators—The aluminium hinges for top-hung ventilators shall be either cast or fabricated out of extruded sections and shall be riveted to the fixed rail after cutting a slot in it. The aluminium alloy for cast hinges shall conform to IS Designation A-5-M of IS: 617-1959 Specification for Aluminium and Aluminium Alloy Ingots and Castings for General Engineering Purposes (*Revised*), and for extruded section of hinge to IS Designation HE10-WP or HE30-WP of IS: 733-1956 Specification for Wrought Aluminium and Aluminium Alloys, Bars, Rods and Sections (For General Engineering Purposes).

6.3.1 The peg stay shall be 300 mm long as in side-hung shutter (see Fig. 19). The locking bracket shall be fixed to the fixed frame.

6.4 Centre-Hung Ventilators—Centre-hung ventilators (see Fig. 22) shall be hung on two pairs of cup pivots of aluminium alloy to IS Designation NS-4 of IS: 737-1955 Specification for Wrought Aluminium and Aluminium Alloys,

*Since revised.

†Second revision in 1974.

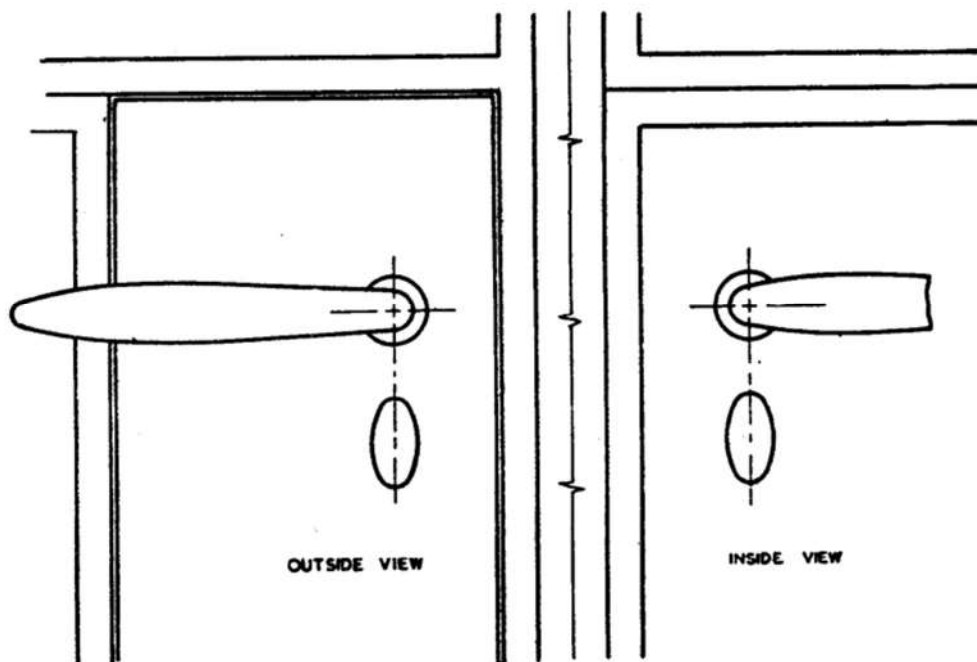


FIG. 27 TYPICAL DOOR HANDLE

Sheet and Strip (For General Engineering Purposes) and IS Designation A-5-M of IS: 617-1959 Specification for Aluminium and Aluminium Alloy Ingots and Castings for General Engineering Purposes (*Revised*) or on brass or bronze cup pivots which should be either chromium or cadmium plated and riveted to the inner and outer frames of the ventilator to permit the ventilator to swing through an angle of approximately 85°. The opening portion of the ventilator shall be so balanced that it remains open at any desired angle under normal weather condition.

6.4.1 Cast aluminium conforming to IS Designation A-5-M of IS: 617-1957 Specification for Aluminium and Aluminium Alloy Ingots and Castings for General Engineering Purposes (*Revised*) or bronze (gunmetal) which shall be either chromium-plated or cadmium-plated spring catch shall be fitted in the centre of the top bar of the ventilator for the operation of the ventilator. This spring catch shall be secured (pre-

ferably screwed or riveted) to the frame and shall close into an aluminium catch plate riveted or welded to the outside of the outer ventilator frame bar (*see* Fig. 23).

6.4.2 Aluminium- or cadmium-plated brass cord pulley-wheel in an aluminium bracket shall be fitted at the sill of the ventilator with aluminium or galvanized or cadmium-plated steel screws or, alternatively, welded together with an aluminium cord eye riveted or welded to the bottom inner frame bar of the ventilator in a position corresponding to that of pulley (*see* Fig. 24).

6.5 Doors — The outer fixed frame shall be of section Al-FX8. The shutter frame shall be of either hollow sections Al-HFX5 and Al-HFX6 or of solid sections Al-FX5 and Al-FX6 shown in Fig. 5. Details of construction shall be as shown in Fig. 13.

6.5.1 The kick panels shall be of 1.25 mm aluminium alloy sheet conforming to IS Designation NS3-1/2H of IS: 737-1955 Specification for Wrought Aluminium and Aluminium Alloys, Sheet and Strip (For General Engineering Purposes) and shall be screwed to the frame and the glazing bar.

6.5.2 Hinges — Cast or extruded aluminium alloy hinges for doors shall be of the same type as in the windows but of larger size. The hinges shall normally be of the 50 mm projecting type (*see* Fig. 25). Non-projecting type of hinges (*see* Fig. 26) may also be used.

6.5.3 The handle for doors may be of the design indicated in Fig. 27.

6.5.4 A suitable lock for the door operable either from inside or outside shall be provided.

NOTE — From the point of view of security, the lock which is operable from only one side is better and in the case of such locks, a bolt shall be provided to make them inoperable from the other side.

6.5.5 In double shutter doors the first closing shutter shall have a concealed aluminium alloy bolt at top and bottom (*see* Fig. 28). It shall be so constructed as not to work loose or drop by its own weight.

6.5.6 Single and double shutter doors may be provided with a three-way bolting device (*see* Fig. 29 on P 16). Where this is provided in the case of double shutter door, concealed aluminium bolts may not be provided.

6.6 Composite Units — The doors shall be coupled to windows or side-lights by extruded aluminium sections made from aluminium alloy conforming to IS Designation HE9-WP of IS: 733-1956 Specification for Wrought Aluminium and Aluminium Alloys, Bars, Rods and Sections (For General Engineering Purposes). The coupling member should conform to the dimensions indicated in Fig. 30 (*see* P 17).

6.7 Weather Bar — Where a coupling member is fitted over an external opening shutter, the coupling member should incorporate an integrally extruded weather bar as indicated in Fig. 5.

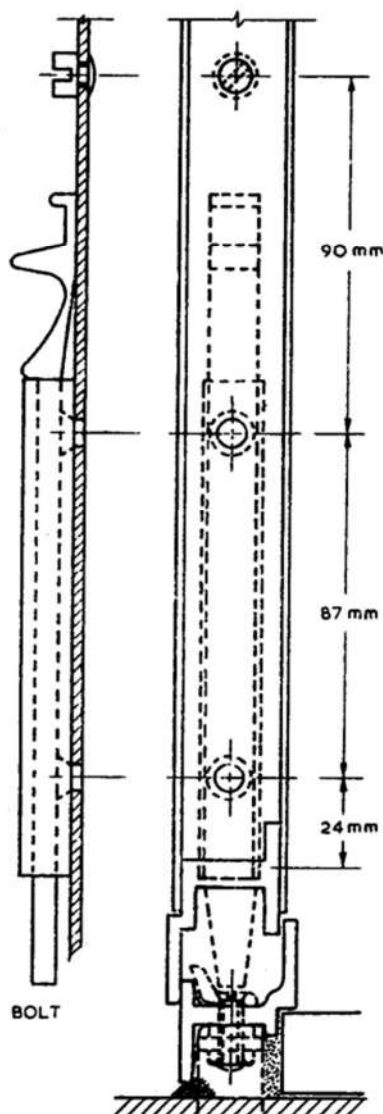


FIG. 28 TYPICAL VERTICAL BOLT FOR DOUBLE SHUTTER DOOR

* Second revision in 1974.
† Since revised.

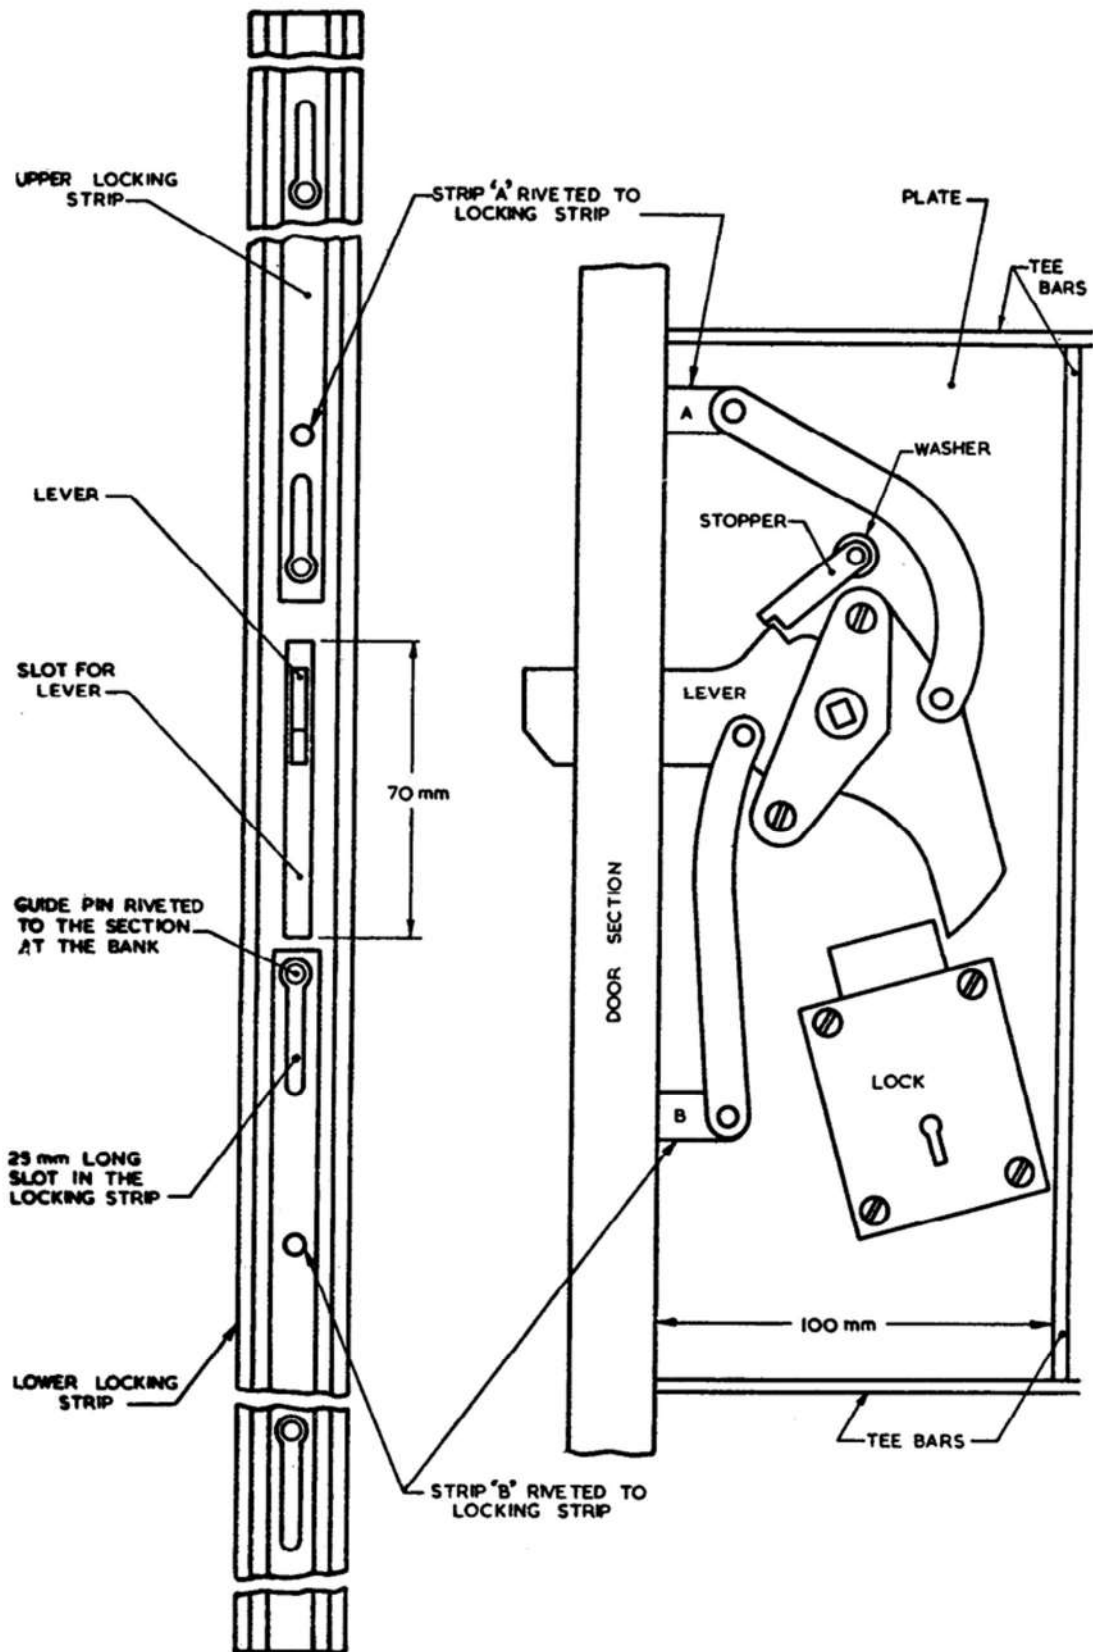


FIG. 29 TYPICAL THREE-WAY BOLTING DEVICE FOR DOORS


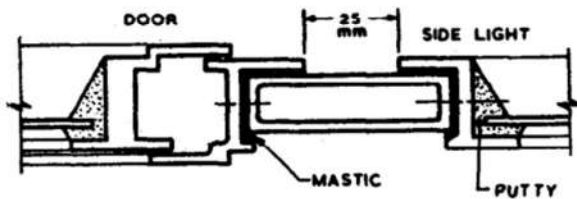


FIG. 30 COUPLING SECTION EXTRUDED FOR COUPLING DOOR TO WINDOW OR SIDE LIGHT

7. POSITION OF BOLTS, FIXING SCREWS AND LUGS

7.1 Outer frames shall be provided with fixing holes centrally in the web of the sections in the position indicated in Fig. 31 (see P 17). Moreover, any steel lugs coming in contact with aluminium should be either galvanized or given one coat of bituminous paint.

7.2 The fixing screws and lugs shall be as given in Table II (see P 18).

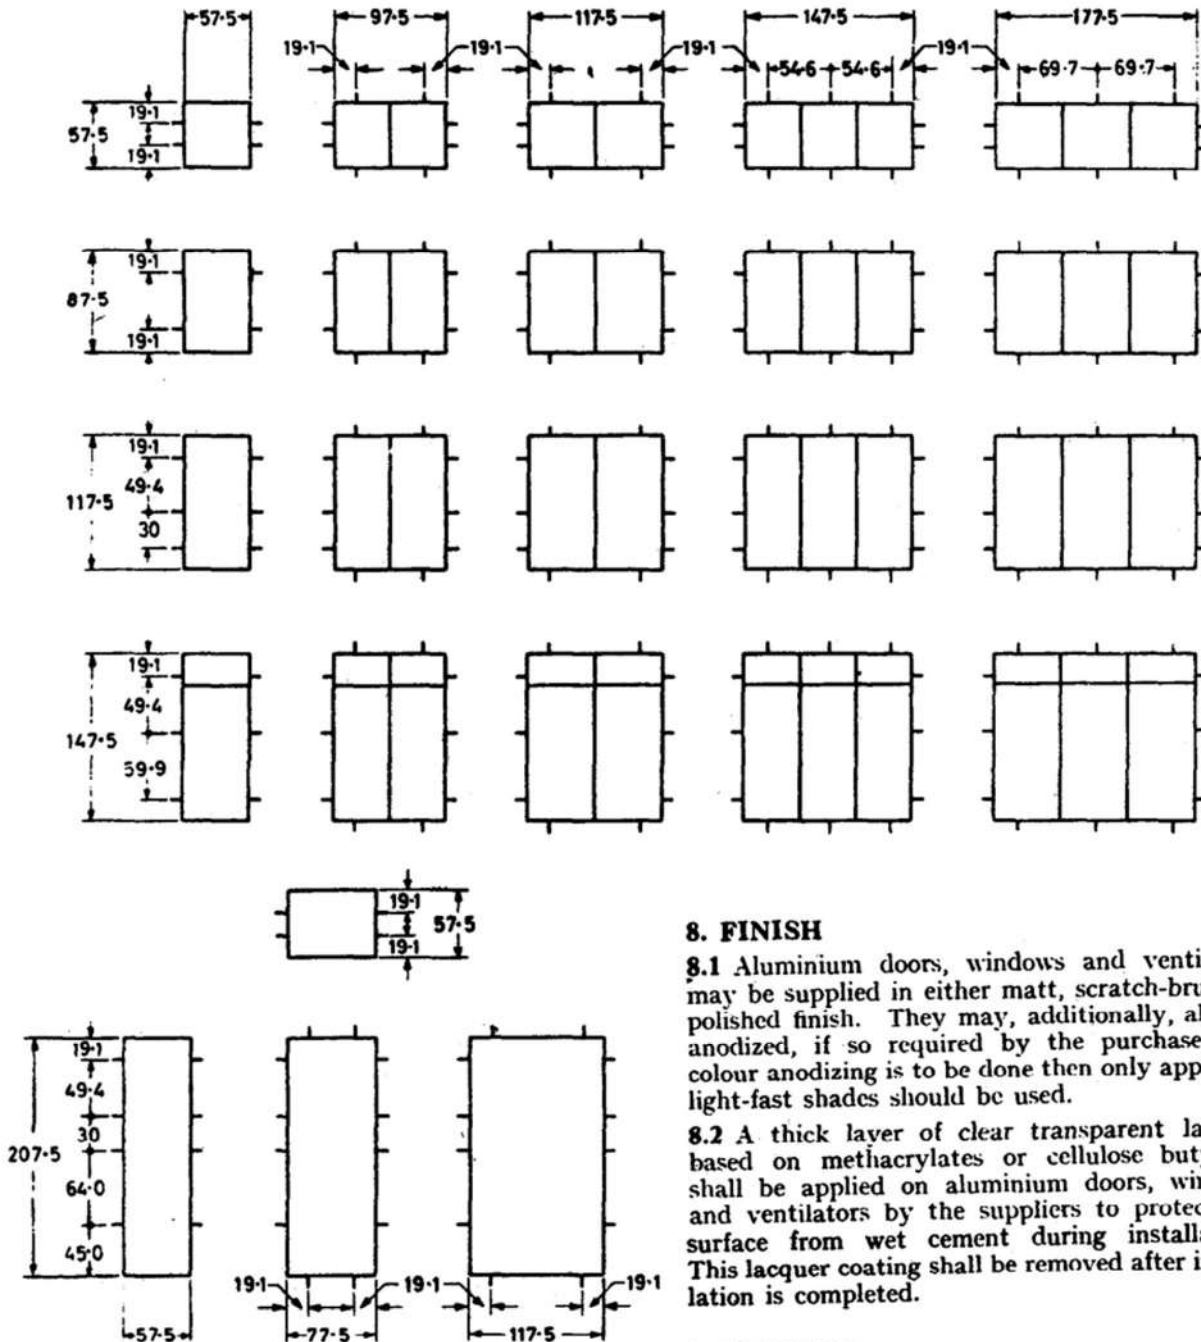

All dimensions in centimetres.

FIG. 31 CHART SHOWING APPROXIMATE POSITIONS OF FIXING HOLES AND NUMBER OF FIXING LUGS

8. FINISH

8.1 Aluminium doors, windows and ventilators may be supplied in either matt, scratch-brush or polished finish. They may, additionally, also be anodized, if so required by the purchaser. If colour anodizing is to be done then only approved light-fast shades should be used.

8.2 A thick layer of clear transparent lacquer based on methacrylates or cellulose butyrate, shall be applied on aluminium doors, windows and ventilators by the suppliers to protect the surface from wet cement during installation. This lacquer coating shall be removed after installation is completed.

9. GLAZING

9.1 Glazing shall be provided on the outside of the frames.






FIG. 32 FIXING SCREW FOR WOODEN FRAMES OR PLUGS IN CONCRETE

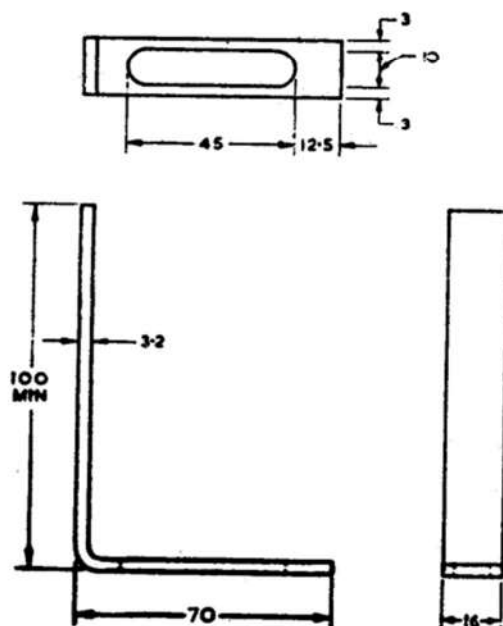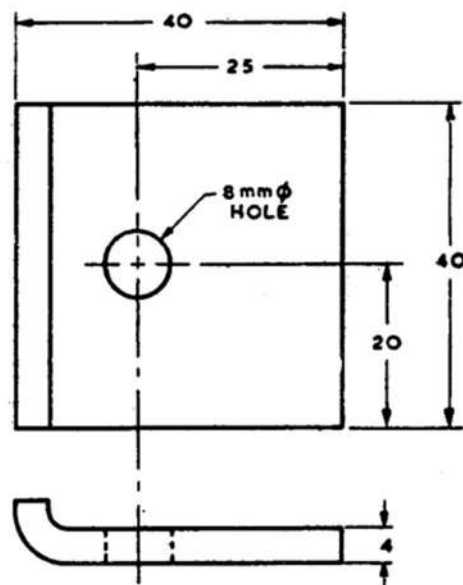

All dimensions in millimetres.

FIG. 33 SLOTTED FIXING LUG
(FOR BRICKWORK AND MASONRY)

All dimensions in millimetres.

FIG. 34 FIXING CLIP FOR STEEL WORK

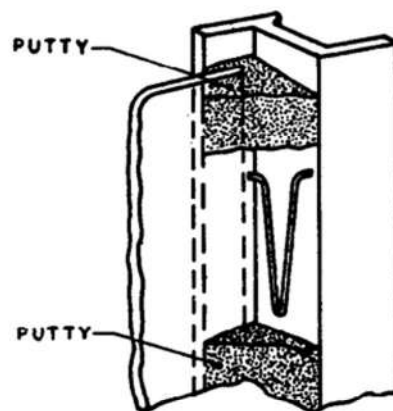


FIG. 35 GLAZING CLIPS

TABLE II FIXING SCREWS AND LUGS

(Clause 7.2)

SL No.	PLACE OF FIXING	SIZE OF SCREW OR LUG
i)	To wooden frames rebated on the outside	30 mm × No. 10 galvanized wood-screws (see Fig. 32)
ii)	To plugs in concrete, stone or brick work rebated on the outside	do
iii)	To plugs in concrete, stone or brick work not rebated on the outside (that is plain or square jambs)	45 mm × No. 10 galvanized wood-screws
iv)	Direct to brick work or masonry (that is plain or square jambs)	Slotted steel adjustable lugs (natural finish) not less than 100 × 16 × 3 mm countersunk galvanized machine screws and nuts 19.0 × 6.3 mm (see Fig. 33)
v)	To steel work	Standard clips and 8 mm galvanized bolts with hexagonal nuts (see Fig. 34)

9.1.1 If required, glazing clips (see Fig. 35 on p. 18) may be provided as extra fittings by mutual arrangement between the purchaser and the supplier. Four glazing clips may be provided per glass pane, except for door type 8HS21 where the glazing clips shall be six per glass pane. In case of doors, windows and ventilators without horizontal glazing bars the glazing clips shall be spaced according to the slots in the vertical members, otherwise, the spacing shall be 30 cm.

NOTE — Glazing clips are not usually provided for normal size glass panes. Where large size glass panes are required to be used or where the door or the window is located in heavily exposed situation, holes for glazing clips have to be drilled prior to fabrication and cannot be done at any later stage. Use of glazing clips, where necessary, shall be specified while placing the order.

10. PACKING

10.1 All doors, windows and ventilators shall be

despatched with the opening parts suitably secured to preserve alignment when fixing and glazing.

10.2 Fixing lugs, coupling fittings and all hardware shall be despatched separately.

10.3 Composite windows shall be despatched uncoupled.

11. MARKING

11.1 All doors, windows and ventilators shall be suitably marked on the frames with a mark identifying the manufacturer and the type.

11.1.1 The units may also be marked with the ISI Certification Mark.

NOTE—The use of the ISI Certification Mark is governed by the provisions of the Indian Standards Institution (Certification Marks) Act, and the Rules and Regulations made thereunder. Presence of this mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard, under a well-defined system of inspection, testing and quality control during production. This system, which is devised and supervised by ISI and operated by the producer, has the further safeguard that the products as actually marketed are continuously checked by ISI for conformity to the standard. Details of conditions, under which a licence for the use of the ISI Certification Mark may be granted to manufacturers or processors, may be obtained from the Indian Standards Institution.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act*, 1986 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publication), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Handbook' and 'Standards Monthly Additions'.

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones: 323 01 31, 323 33 75, 323 94 02

Telegrams: Manaksanstha
(Common to all offices)

Regional Offices:

	Telephone
Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110002	323 76 17, 323 38 41
Eastern : 1/14 C.I.T. Scheme VII M, V.I.P. Road, Maniktola CALCUTTA 700054	{ 337 84 99, 337 85 61 337 86 26, 337 91 20
Northern : SCO-335-336, Sector 34-A, CHANDIGARH 160022	{ 60 38 43 60 20 25
Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600113	{ 235 02 16, 235 04 42 235 15 19, 235 23 15
Western : Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400093	{ 832 92 95, 832 78 58 832 78 91, 832 78 92
Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR. PATNA. PUNE. THIRUVANANTHAPURAM.	